

产 品 手 册

CYS型单级双吸中开离心泵



辰禹（重庆）流体设备有限公司

Chenyu (Chongqing) fluid equipment Co., Ltd

// 目 录

1. 概述	1
2. 主要性能参数范围	1
3. 配套方案及适应场合	1
4. 泵型号描述	2
5. 结构特点	3
6. 产品结构图	4
7. 型谱图	8
8. 性能参数	11
9. 性能曲线	33
10.连接法兰尺寸	56
11. 主要外形尺寸	58
12. 产品配置表	68

// Contents

1. General	1
2. The Main Performance Parameters	1
3. Pump Supporting Program and Services	1
4. Discription of Pump Type	2
5. Structure Feature	3
6. Construction drawings	4
7. Hydranlic Coverage	8
8. Performance Dat	11
9. Performance Curves	33
10. Connection Flange Dimension	56
11. The Main Outline Dimension	58
12. Supply Range of Complete Set	68

1.概述

CYS型泵为新一代高效节能单级双吸中开式离心泵,主要适用于自来水厂、空调循环用水、供热管网系统、建筑供水、灌溉、排水泵站、电厂、工业供水系统、消防系统、船舶工业、矿山给排水等输送液体的场合。是 SH、S、SA、SLA、SAP 型中开双吸泵的全面换代产品。

2.主要性能参数范围

- 泵出口直径 Dn: 80~1000mm
- 流量 Q: 22~16236m³/h
- 扬程 H: 7~300m
- 工作温度 T: -20℃~200℃
- 固体颗粒 ≤80mg/L
- 工作许用压力 ≤5Mpa

3. 配套方案及适应场合

我们重视节能环保,通过分析介质及运行环境的要求,对过流部件采取最优的材质组合,以达到安全,可靠,经济运行。

1.General

CYS type pump is a new generation of high performance single-stage double-suction centrifugal split pumps. They are mainly used in delivering liquids of the water plant, air conditioner circulation water, heating pipe network system, building water supply, irrigation and drainage of pump stations, power plants, industrial water supply system, fire protection, ships industry and mine. It is a new substitute of SH, S, SA, SLA and SAP.

2.Main performance parameters

- Pump outlet diameter Dn: 80~900mm
- Capacity Q: 22~16236m³/h
- Head H: 7~300m
- Temperature T: -20℃~200℃
- Solid parameter ≤80mg/L
- Permissible pressure ≤5Mpa

3.Pump Supporting Program and Services

We value the energy saving and environmental protection, by analyzing the requirements of media and operation environment, adopt optimal combinations of materials at the parts contact with media, insure security, reliability, economical operation.

泵配套方案

Pump Supporting program

项目 Item	泵配套方案 A Pump Supporting program A	泵配套方案 Q Pump Supporting program Q		配套方案 B Pump Supporting program B	配套方案 S Pump Supporting program S		
		1	2		1	2	3
泵壳 Pump casing	灰铸铁 Grey cast iron	球墨铸铁 Ductile cast iron	球墨铸铁 Ductile cast iron	超低碳不锈钢 Extra low carbon stainless steel	镍铬铸铁 Ni-Cr chromium cast iron	球墨铸铁 Ductile cast iron	不锈钢 Stainless steel
叶轮 Impeller	灰铸铁 Grey casting iron	铸钢 Cast steel	不锈钢 Stainless steel	双相不锈钢 Duplex S.S.	锡青铜 Tin bronze	锡青铜 Tin bronze	锡青铜 Tin bronze
主轴 Shaft	45 号钢 #45 steel	45 号钢 #45 steel	不锈钢 Stainless steel	双相不锈钢 Duplex S.S.	2Cr13	2Cr13	2Cr13
轴套 Shaft sleeve	45 号钢 #45 steel	45 号钢 #45 steel	不锈钢 Stainless steel	超低碳不锈钢 Extra low carbon stainless steel	1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni9Ti
密封环 Wear ring	灰铸铁 Grey casting iron	铸钢 Cast steel	铸钢 Cast steel	双相不锈钢 Duplex S.S.	锡青铜 Tin bronze	锡青铜 Tin bronze	锡青铜 Tin bronze
适用场合 Services	适用于普通清水， 以及低强度要求 For pure water and lower strength applications	适用于普通清水，以及更高强度 要求 For pure water high strength applications		适用于含一定量颗粒杂质的 PH < 6 的其它腐蚀性 介质；以及更高强度要求 For media with more solid impurities, PH<6 chemical corrosion and for high strength applications	海水泵 The sea water pump		
说明: 这些配置为公司推荐使用, 客户可根据本身具体需求进行材质搭配 These configurations are recommended by the manufacturer, customers could change their materials according to specific needs.							

4. 泵型号描述

例: CYS 250-450A-L(R)-J

CYS: 新型中开泵

250: 水泵出口直径(mm)

450: 标准叶轮直径(mm)

A: 泵叶轮外径的改变(最大直径时不表示)

L: 立式安装(vertical mount)

R: 热水型(heating water)

J: 泵转数改变(保持原来转速时不表示)

4. Description of Pump Type

For example: CYS 250-450A-L(R)-J

CYS: advanced type split centrifugal pump

250: pump outlet diameter

450: standard impeller diameter

A: Changed outer diameter of impeller (the max diameter without mark)

L: vertical mount

R: heating water

J: Pump speed changed (Maintain the speed without mark)

5. 结构特点

1) 水泵两端支承间距短,泵运行稳定,振动噪声小,并可适当升速运行,使水泵适应范围更广。

2) 进出水口在同一直线上,使管线布置简单方便、美观。

3) 同一转子可反向运行,降低了水锤引起水泵损坏的风险。

4) 独特的高温型设计,水泵采用中间支撑、加厚泵体、密封冷却、轴承稀油润滑等,使水泵可应用于高达 200℃的运行场合,特别适用于供热管网使用要求。

5) 泵体部分可根据使用条件的变化采取立式或卧式安装,密封可采用机械密封或填料密封。

6) 水泵外型应用工业化设计,线条清晰,符合现代审美观。

7) 选(采)用优异的水力模型,使泵的效率比同类型泵高 2-3%,大大降低了泵的运行成本。

8) 必需汽蚀余量降低 1-3 米,从而降低土建投资,延长了使用寿命。

9) 选用进口轴承,零件材料可根据用户应用要求选用,使泵能适应各种现场运行条件,大大降低了维修成本。

10) 无调整式机械密封,更换机械密封成为轻松简单的工作。

11) 应用弹性预应力设计装配,转子部件装拆简单迅速。

12) 装配时无须调整各种间隙。

5. Structure Feature

1) Type CYS pumps work stably with less noise and vibration, may be properly work at raising speed due to short spacing between both side supports, thus they can be widely used.

2) The pipelines arrangement of type CYS pump looks simple and beautiful due to inlet and outlet at the same line.

3) The same rotor of type CYS pumps can be operated in reverse direction to avoid damage to the pumps by water hammer.

4) Unique design of high temperature form: using middle support, thickening the pump casing, using cooling seals and oil lubrication bearing, make CYS pump suitable for working at 200℃, especially for supplying heating net system.

5) Type CYS pump can be vertically or horizontally mounted according to different working condition, with mechanical seals or packing seals.

6) With industrial design, the outline of CYS is clear and beautiful in line with modern aesthetics.

7) The efficiency of CYS pumps are 2%-3% higher than the same type pumps due to adopting advanced hydraulic model and thus reduce the operating costs significantly.

8) The NPSHr of type CYS pumps are 1-3 meters lower than the same type split pumps which reduced the foundation costs and extend the using life.

9) Choosing import brand bearing, and other parts material chosen by customer, make the pump suitable for any operation condition and reduce the maintenance cost significantly.


10) It is not necessary to adjust mechanical seals, so it is very easy and simple to replace them.

11) It is rapid and simple to assemble and dismount the rotor parts due to using elastic prestress assembling.

12) It is unnecessary to make adjustment to any clearance when assembling.


6. 产品结构图(Construction drawings)

结构形式 I (structure drawing I)

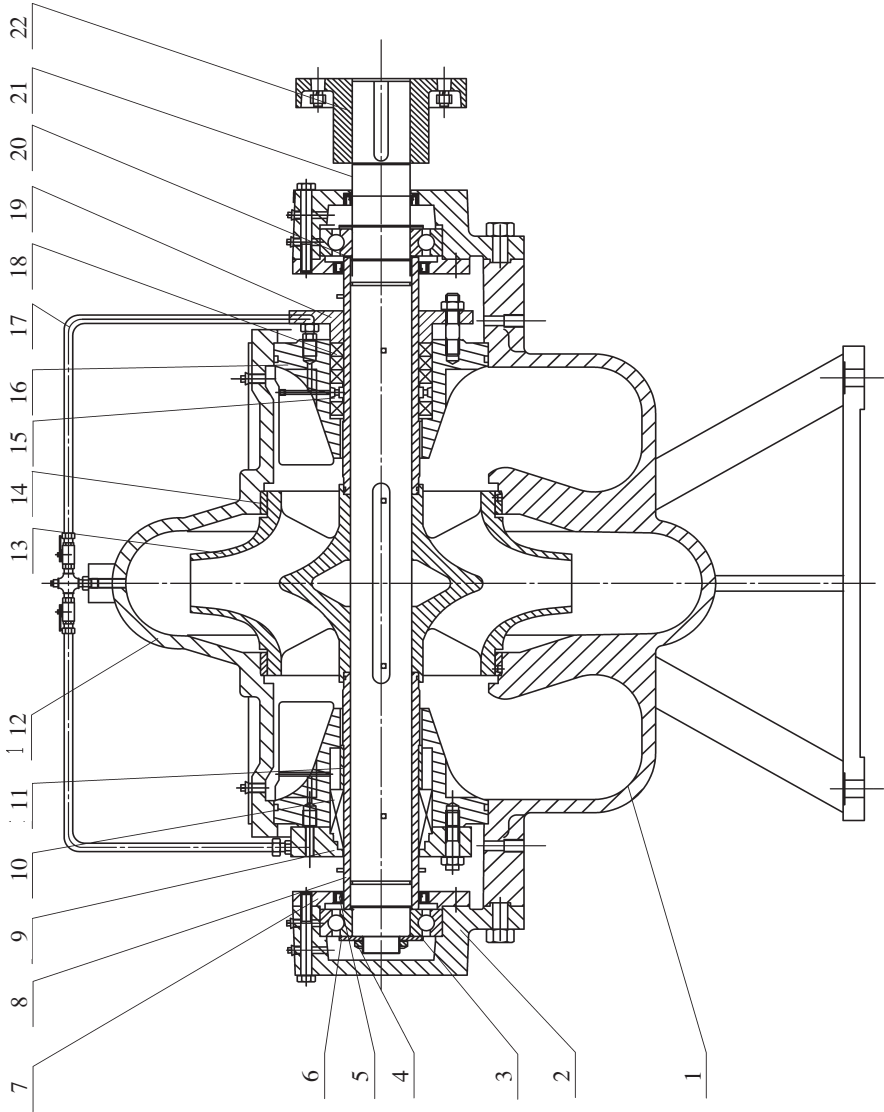


NO.	零件名称	Parts Name
22	联轴器	Coupling
21	轴	Shaft
20	轴承衬圈	Bearing liner
19	填料压盖	Packing gland
18	填料	Gland packing
17	水封管部件	Water sealing pipe
16	密封体	Seal housing
15	填料环	Seal cage
14	口环	Impeller ring
13	叶轮	Impeller
12	泵盖	Casing cover
11	密封衬套	Seal bushing
10	机械密封	Mechanical seal
9	机封压盖	Mechanical seal cover
8	轴套	Shaft sleeve
7	轴承压盖	Bearing cover
6	轴承压环	Bearing ring
5	骨架油封	Skeleton oil seal
4	锁紧螺母	Lock nut
3	深沟球轴承	Deep groove ball bearing
2	轴承体	Bearing support
1	泵体	Casing

结构形式 II(structure drawing II)

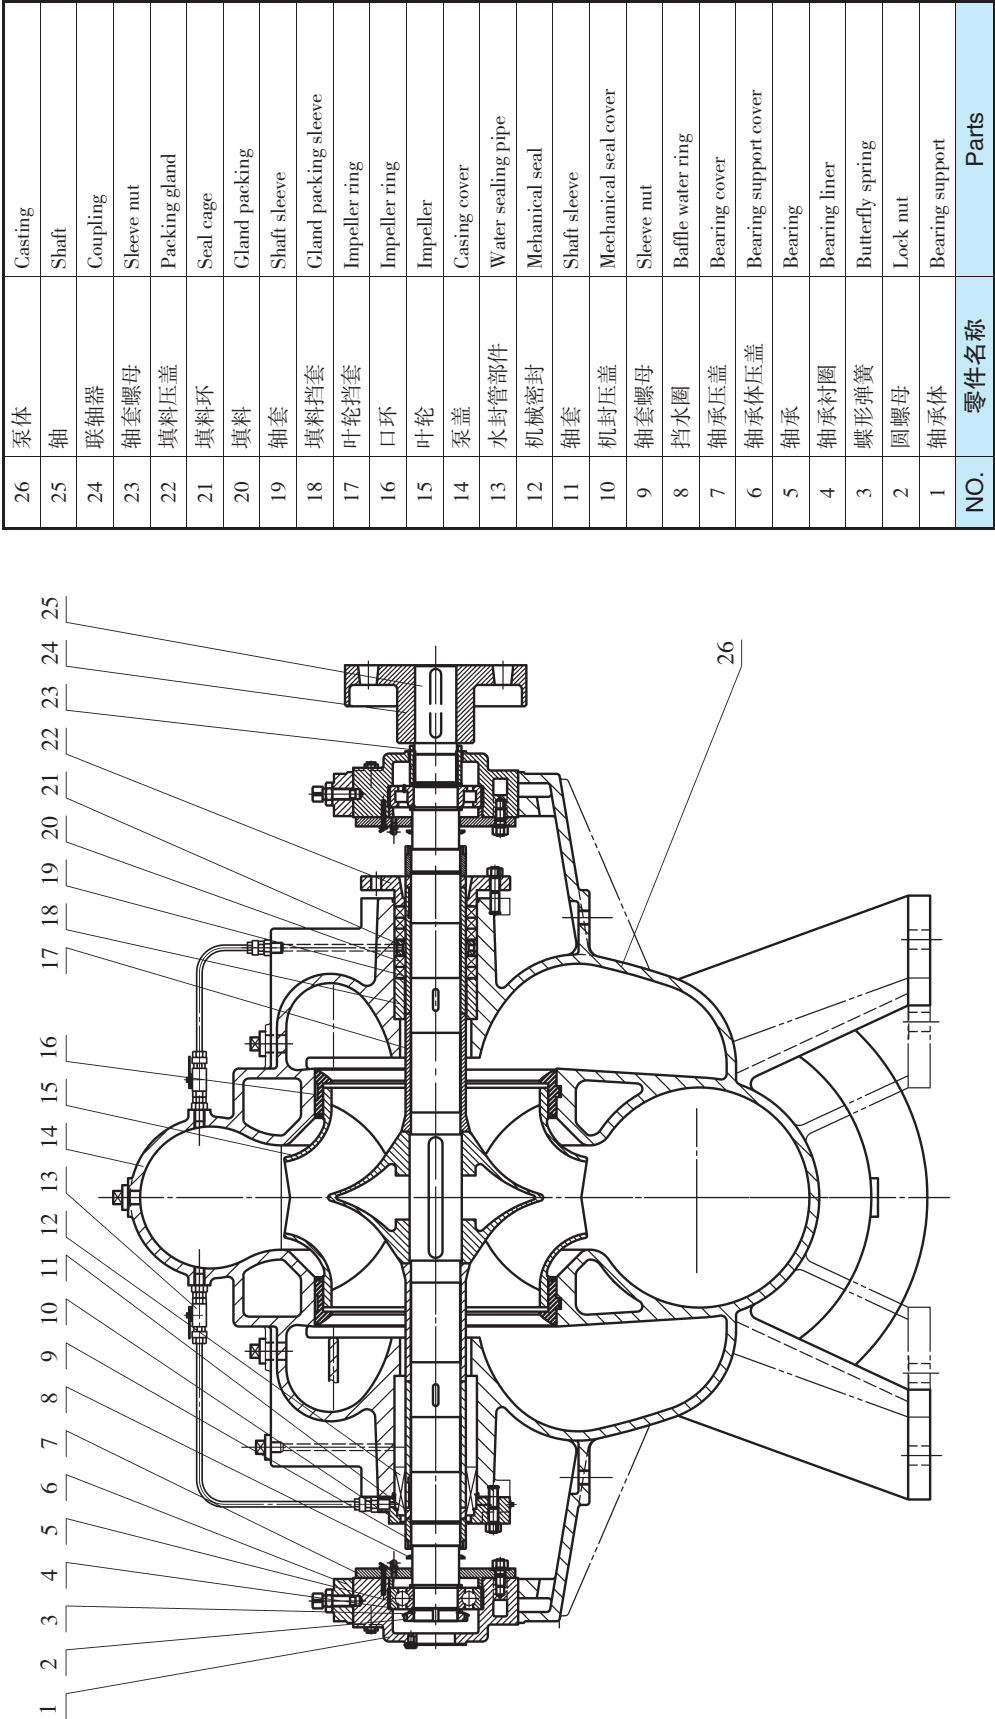


结构形式Ⅲ (structure drawing Ⅲ)

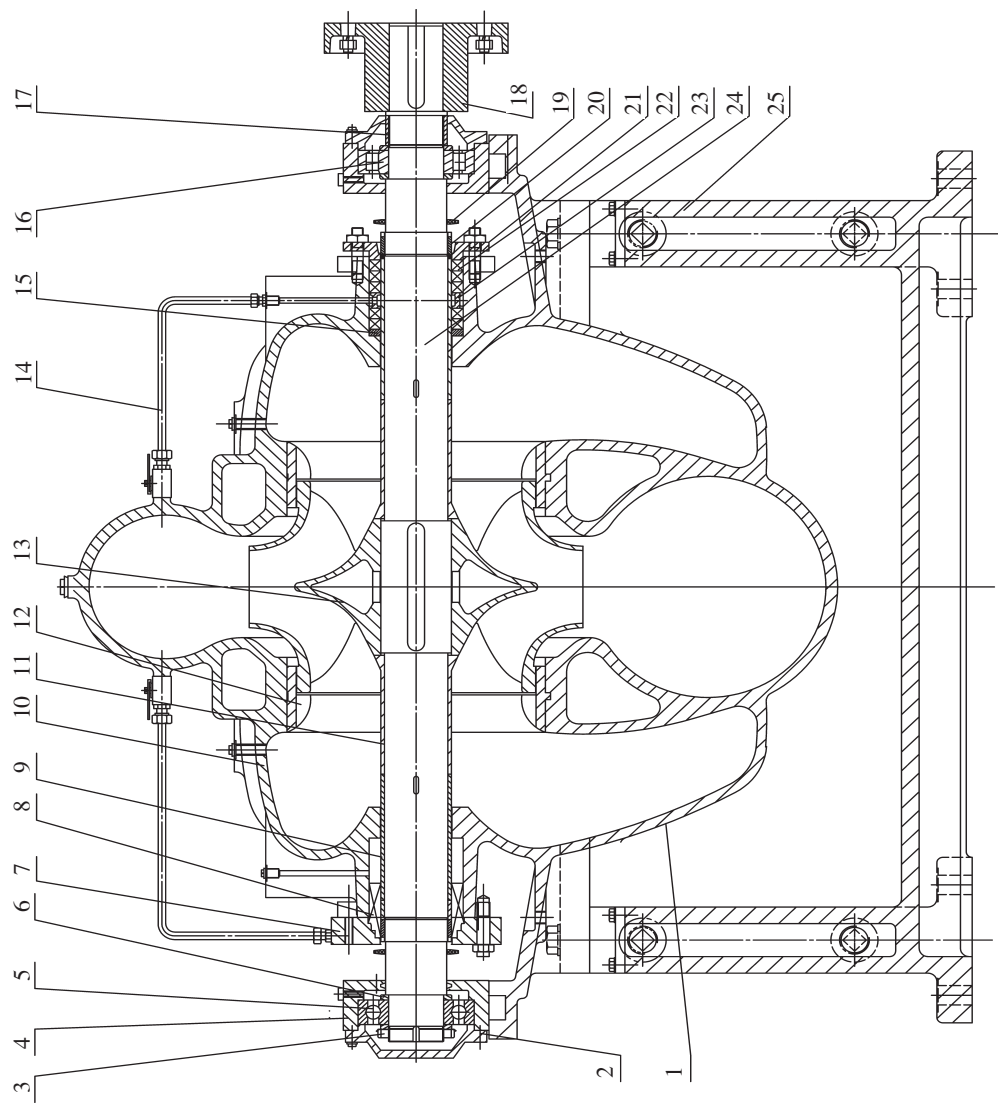

NO.	零件名称	Parts
25	底座	Base
24	轴	Shaft
23	填料环	Seal cage
22	填料	Gland packing
21	填料压盖	Packing gland
20	轴套螺母	Sleeve nut
19	挡水圈	Ring for keeping off the water
18	联轴器	Coupling
17	轴套螺母	Sleeve nut
16	圆柱滚子轴承	Cylindrical roller bearing
15	填料函衬套	Stuffing box bushing
14	水封管部件	Water sealing pipe
13	叶轮	Impeller
12	口环	Impeller ring
11	叶轮挡套	Impeller sleeve
10	泵盖	Casing cover
9	轴套	Shaft sleeve
8	机械密封	Mechanical seal
7	机封压盖	Mechanical seal cover
6	轴承压环	Bearing ring
5	深沟球轴承	Deep groove ball bearing
4	轴承体	Bearing support
3	锁紧螺母	Lock nut
2	轴承压盖	Bearing cover
1	泵体	Casing


结构形式IV (structure drawing IV)

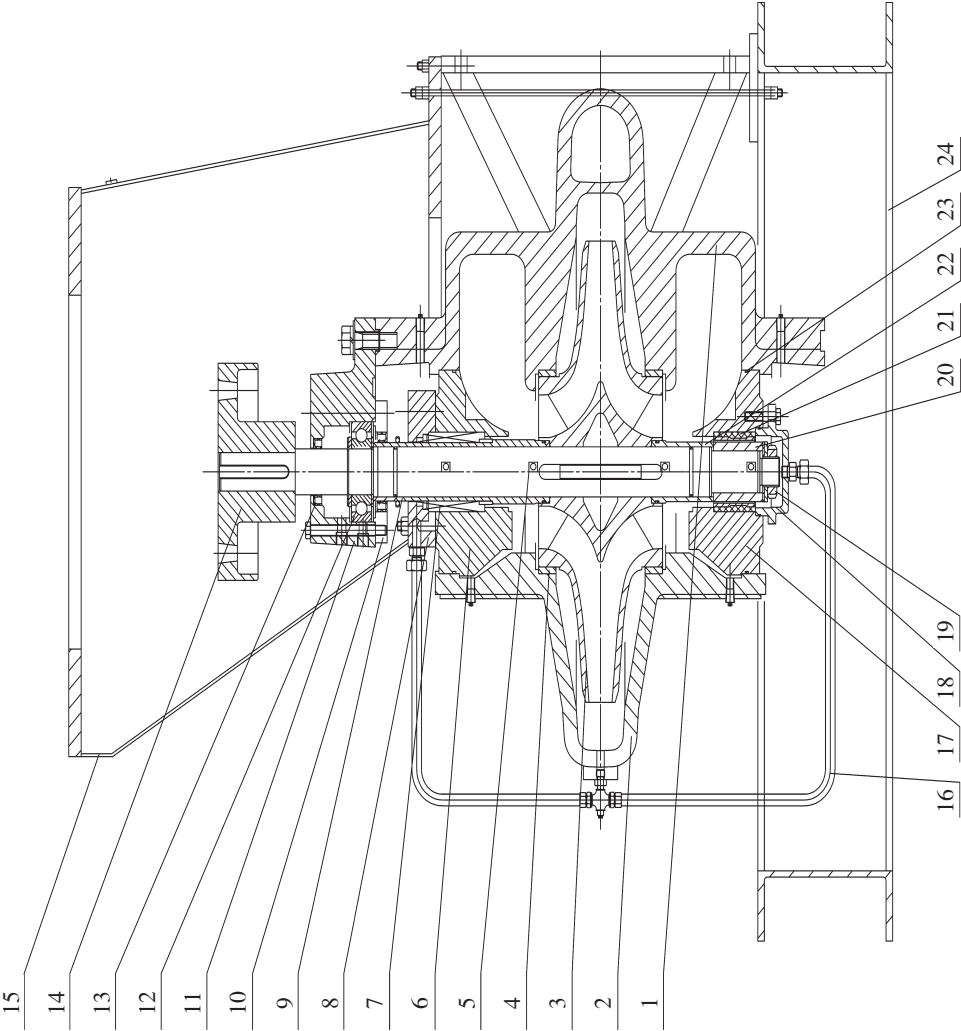


NO.	零件名称	Parts
24	底座	Base
23	O 型密封圈	O-ring
22	轴套	Shaft sleeve
21	水导轴承	Guide bearing
20	轴套	Shaft sleeve
19	圆螺母	Lock nut
18	水导轴承压盖	Guide bearing gland
17	导轴承密封体	Guide bearing seal housing
16	水封管部件	Water sealing pipe
15	电机支座	Motor stool
14	联轴器	Coupling
13	骨架油封	Framework oil seal
12	轴承	Bearing
11	轴承体	Bearing support
10	轴承压盖	Bearing cover
9	轴套	Shaft sleeve
8	机封压盖或填料压盖	Packing gland or mechanical
7	机械密封或填料密封	Packing seals or mechanical
6	密封体	Seal housing
5	轴	Shaft
4	密封环	Wearing ring
3	叶轮	Impeller
2	泵盖	Casing cover
1	泵体	Casing

7. 型谱图(Hydraulic coverage)


型谱图（一）（Hydraulic coverage I）

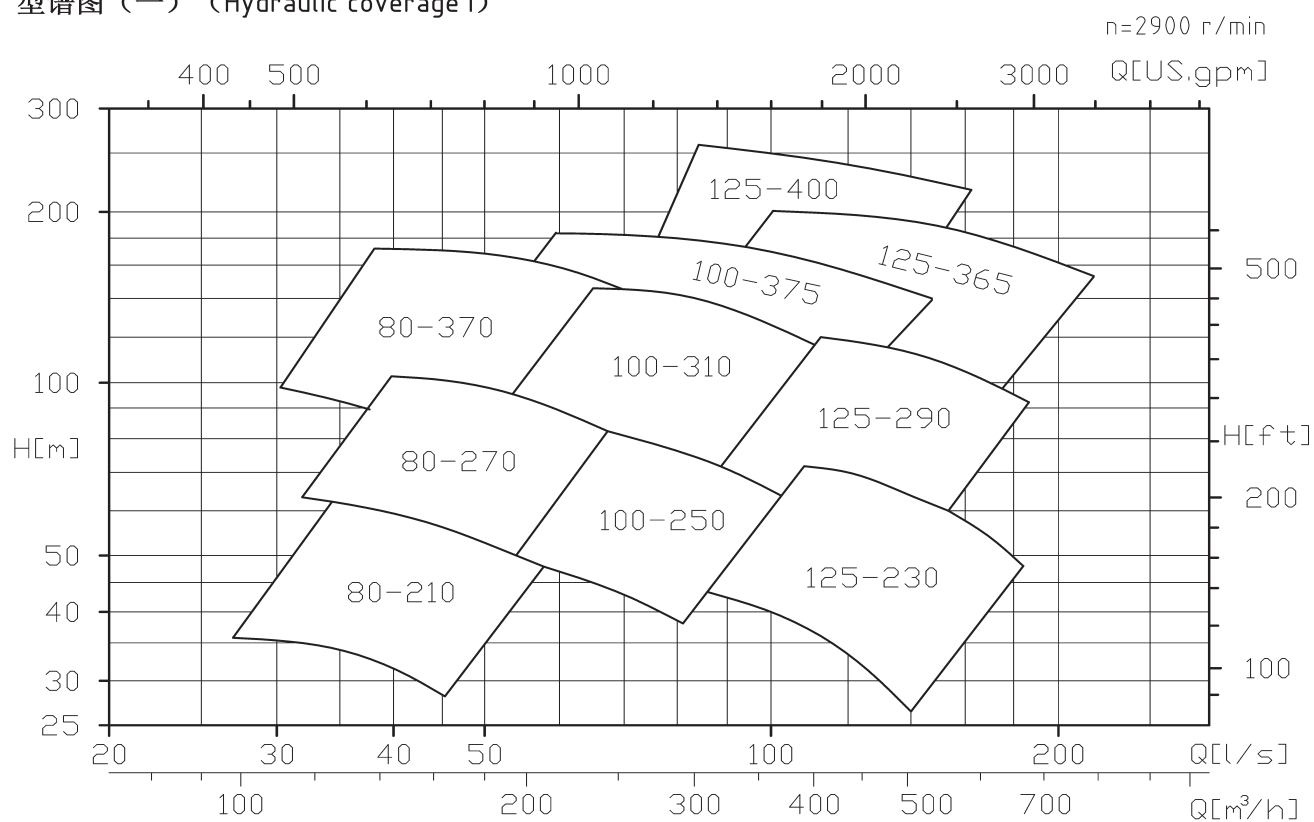


型谱图（二）（Hydraulic coverage II）

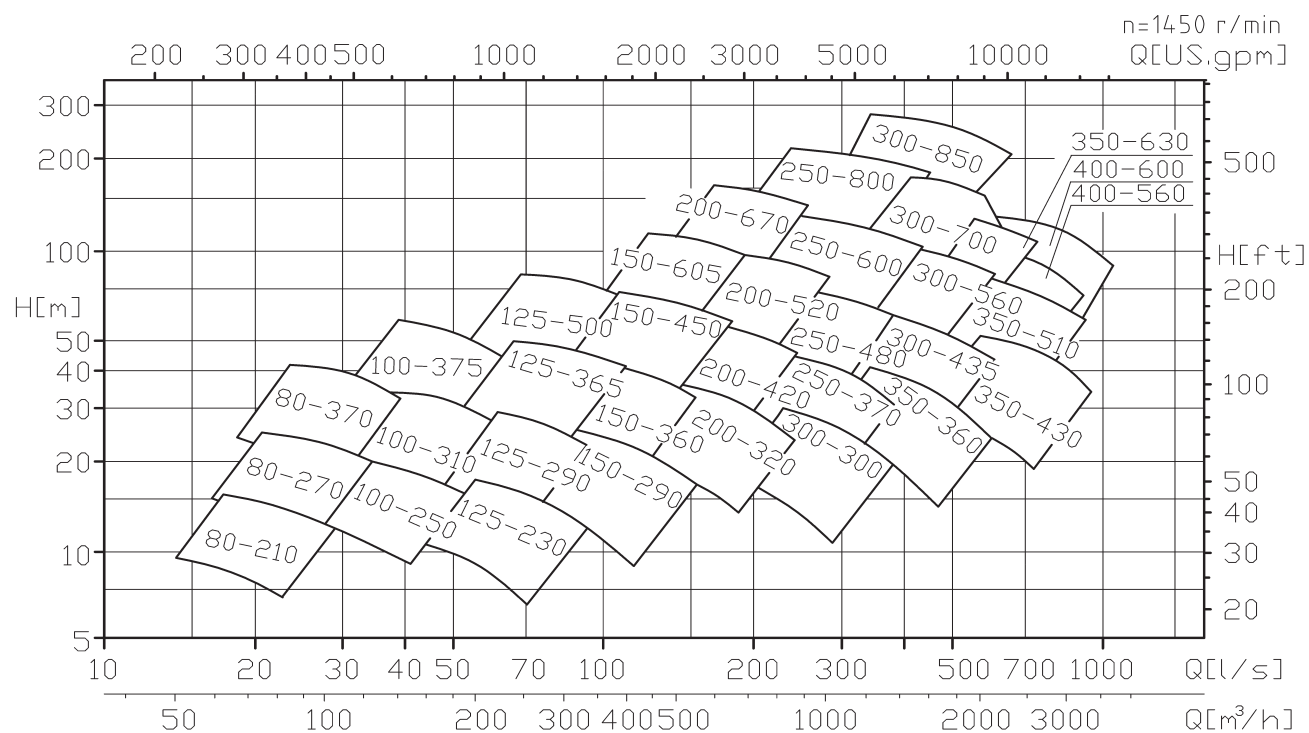


型谱图（三）（Hydraulic coverage III）

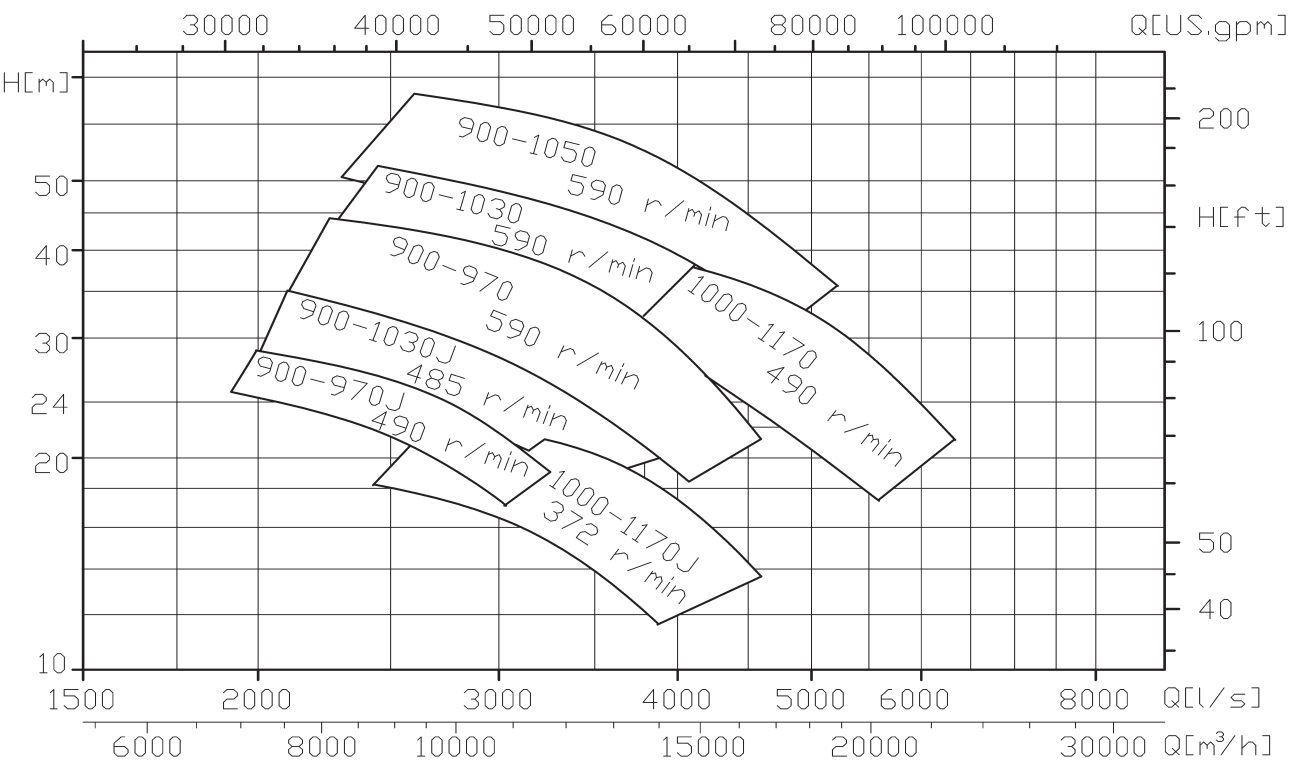


型谱图（四）（Hydraulic coverage IV）

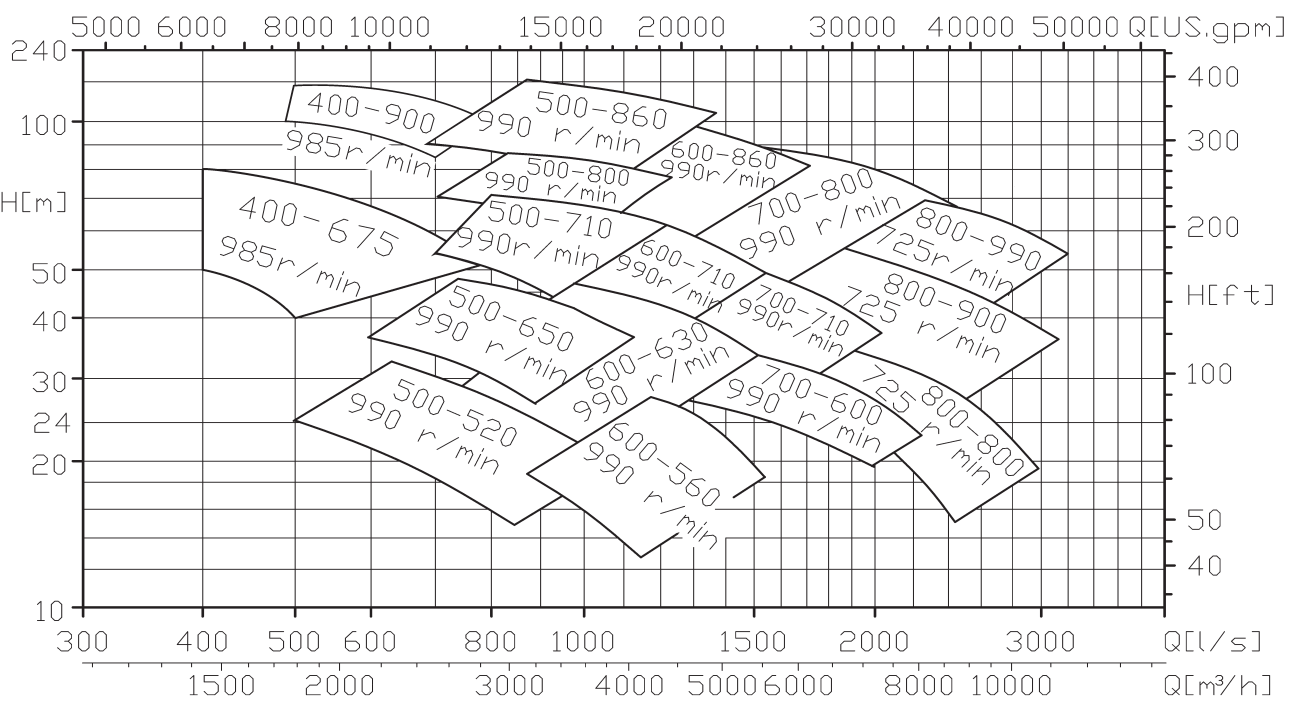

型谱图（五）（Hydraulic coverage V）

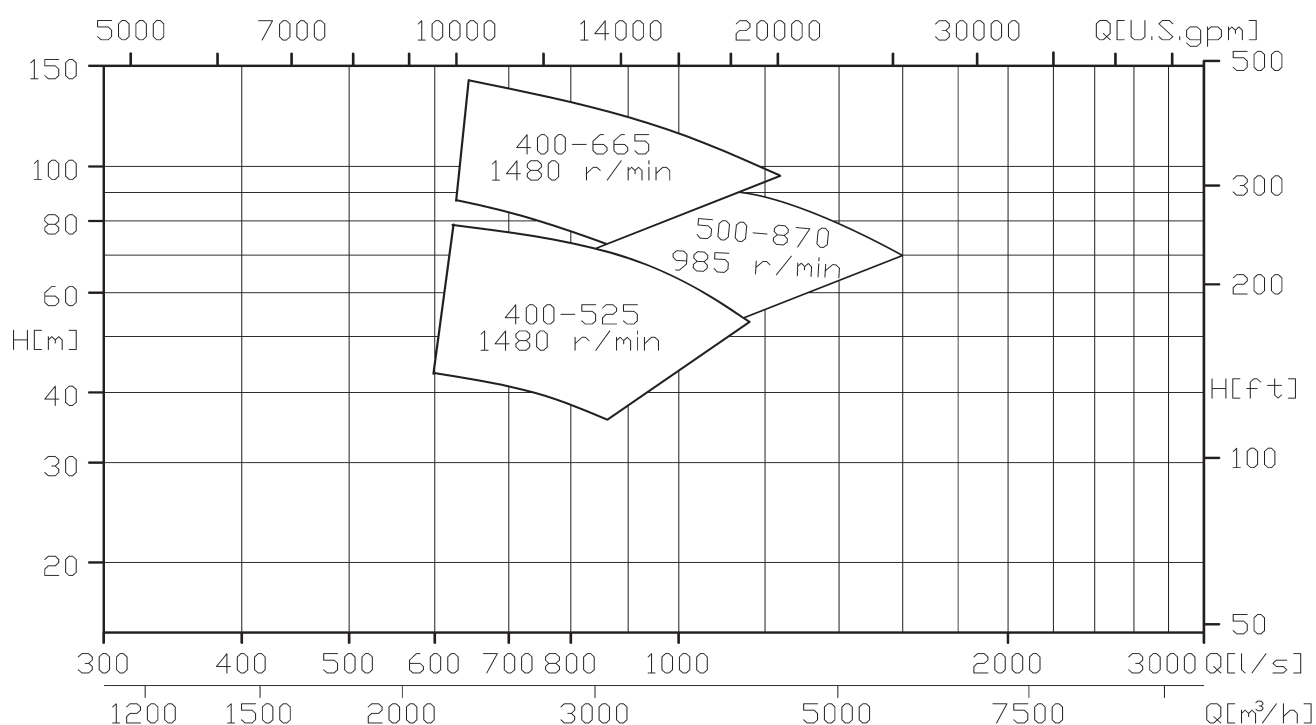

型谱图（六）（Hydraulic coverage VI）

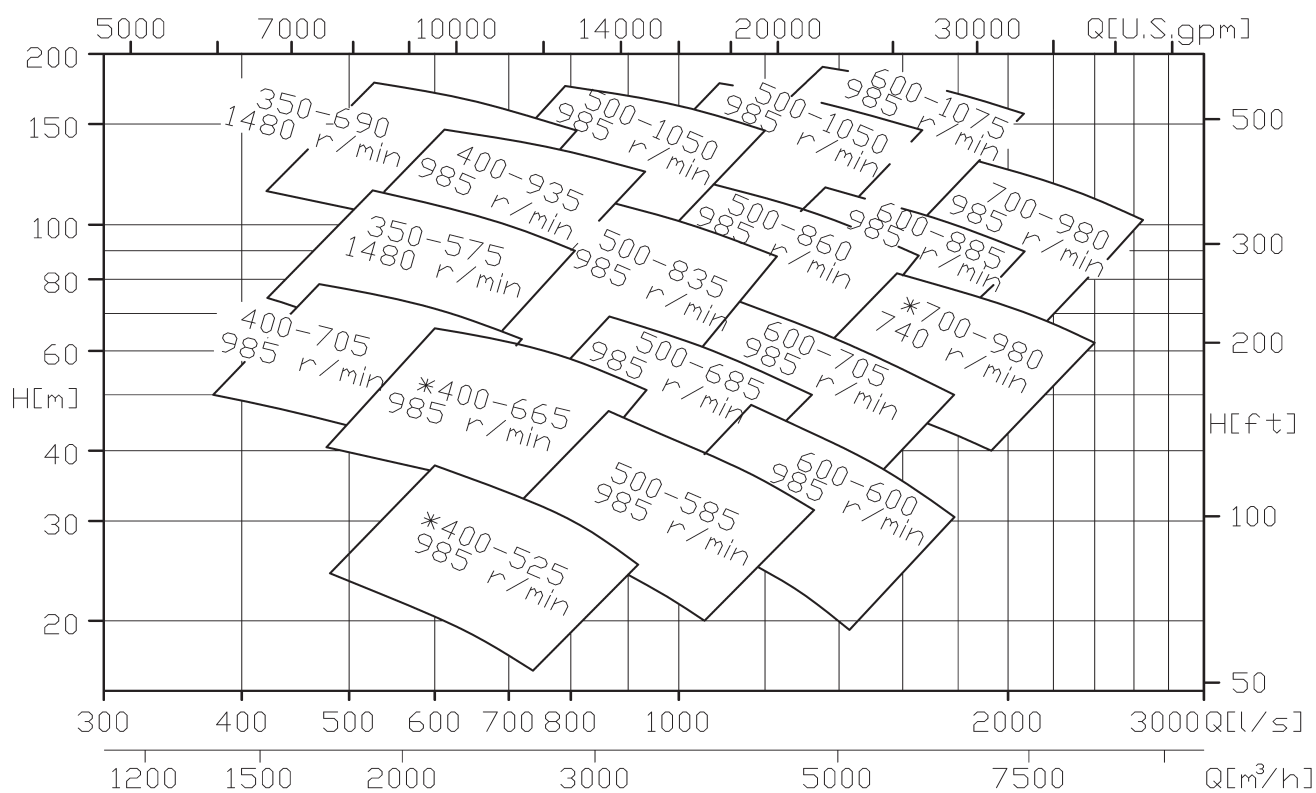

8. 性能参数(Performance Data)

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
80–210	J	50.1	13.9	16	1450	2.9	5.5	75	1.5	结构形式 I Structure drawing I
		83.5	23.2	13.8		3.8		82	1.6	
		100.1	27.8	12.4		4.2		80	2.1	
	JA	46.1	12.8	13.8		2.3	4	74	1.5	
		77	21.4	11.8		3		81	1.6	
		92.5	25.7	10.5		3.3		79	2.0	
	JB	42	12.5	11.8		2	3	72	1.5	
		70.4	19.6	9.8		2.3		80.5	1.6	
		84	23.3	9		2.6		78	1.8	
	JC	38.6	10.7	10		1.4	3	72	1.5	
		64.4	17.9	8.6		1.9		78	1.6	
		77.3	21.5	7		1.9		76	1.7	
		98.7	27.4	64.8	23.2	37	75	3.5		
		164.5	45.7	55	30		82	4.5		
		197.4	54.8	49	32.7		80.5	5.6		
	A	97.7	25.5	56	18.9	30	74	3.5		
		152.9	42.5	47.5	24.7		80	4.1		
		183.5	51	42	26.5		79	5		
	B	83	23	47.5	14.6	30	73	3.5		
		138.6	38.5	40	18.7		80.5	4		
		166.2	46.1	36	20.8		78	4.5		
	C	77.4	21.4	40	11.6	22	72	3.5		
		128.4	37.5	33.5	15.8		77.8	3.8		
		154	42.8	30	16.5		76	4		
80–270	J	61.2	17	25.8	1450	5.8	11	73	1.1	
		102.6	28.5	22.5		8		78.5	1.8	
		121	33.6	20		8.6		76	2.2	
	JA	57.6	16	22.4		4.8	11	72	1.1	
		96.1	26.7	19.3		6.5		77	1.8	
		115.2	32	17.4		7.3		74	2.0	
	JB	52.9	14.7	18		3.7	7.5	70	1.1	
		90	25	16		5.1		76	1.7	
		105.8	29.4	14.3		5.5		74	1.9	
	JC	47.6	13.2	15.7		2.9	5.5	68	1.1	
		79.4	22	13		3.7		75	1.6	
		95.3	26.5	11.6		4.1		73	1.8	
		126	35	103	48.4	75	73	4.0		
		207	57.5	90	64.6		78.5	7.1		
		234	65	84	68.6		78	11		
	A	115.2	32	90	39.2	75	72	2.6		
		192.3	53.4	77	52		77.5	6.1		
		234	65	68	57.7		75	13		
	B	107.3	29.8	75	30.4	55	72	2.5		
		174.6	48.5	65	40.6		76	5		
		209.5	58.2	57.5	44.3		74	10.2		
	C	93	25.8	63	22.4	37	71	2.5		
		172.8	48	50	31.3		75	5		
		216	60	41	32.5		74	12		

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
80-370	J	67	18.6	42.5	1450	11.7	22	66	2.1	结构形式 I Structure drawing I
		111.6	31	38		15.3		75	2.5	
		133.2	37	34		17.1		72	4.6	
	JA	63.4	17.6	36.5		9.5	15	66	1.8	
		104.4	29	33		13		72	2.3	
		126.7	35.2	27		13.5		69	3.1	
	JB	57.6	16	30		7.1	15	66	1.7	
		96.5	26.8	26.5		9.9		70	2.2	
		115.6	32.7	22		10.6		66	3.2	
	JC	52.2	14.5	25		5.6	11	63	1.7	
		87.1	24.2	21.5		7.6		67	2.1	
		104.4	29	18		8.2		62	3.0	
	A	170.7	47.4	168	2900	107	160	73	7.1	
		213.4	59.3	156.8		121.5		75	8.5	
		256.1	71.2	144		139.5		72	11	
		153.2	42.6	144		84.6	132	71	7.2	
		191.5	53.2	136		98.5		72	8	
		229.8	63.8	121.6		107.1		71	10	
	B	137.9	38.3	120		66.2	110	68	7	
		172.4	47.9	112		75.1		70	7.8	
		206.9	57.5	104		86.1		68	8.1	
	C	120.9	33.6	100		49.9	75	66	7	
		151.2	42	92.8		57		67	7	
		181.4	50.4	88		65.8		66	7.6	
100-250	J	90.7	25.2	22	1450	7	11	77	2.3	结构形式 I Structure drawing I
		151.2	42	18.5		9.1		83	2.8	
		198	55	14.5		10		78	4.3	
	JA	79.2	22	18.7		5.5	11	73	2.3	
		133.2	37	15.8		7		81	2.4	
		162	45	14		7.7		80	2.8	
	JB	73.7	20.5	16		4.4	7.5	72	2.3	
		122.4	34	13.5		5.6		79	2.4	
		147.5	41	12		6.1		78	2.6	
	JC	69.5	19.3	13.5		3.5	7.5	72	2.3	
		118.8	33	11		4.5		77.5	2.4	
		139	38.6	10		4.9		76	2.6	
	A	205.2	57	85	2900	60.8	90	78	5.8	
		295.2	82	74		71.6		83	7.3	
		378	105	62		80.7		79	11	
		180	50	74		47.7	75	76	5.8	
		277.2	77	63		58.3		81.5	7.5	
		360	100	49		61.5		78	11.2	
	B	198	55	60		42.5	55	76	6.2	
		252	70	53		46		79	7.6	
		324	90	44		51		76	11.5	
	C	201.6	56	48		34.6	45	76	6.7	
		241.2	67	43		36.2		78	8.2	
		306	85	35		39.4		74	11	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
100–310	J	105.8	29.4	36.3	1450	14.3	22	73	1.5	
		176.4	49	31.2		18.7		80	2.6	
		216	60	26.8		20.4		77	4.3	
	JA	108	30	30.4		12	18.5	74	1.5	
		158.4	44	27		14.7		79	2.1	
		207	57.5	22.5		16.6		76	2.8	
	JB	97.2	27	26		9.3	15	74	1.5	
		144	40	22.5		11.1		79	1.9	
		180	50	19.5		12.5		76	3	
	JC	82.8	23	22		6.7	11	74	1.5	
		133.2	37	18.5		8.4		79	1.7	
		162	45	16.1		9.3		76	2.8	
100–310		234	65	145	2900	121.5	200	76	5.2	结构形式 I Structure drawing I
		349.2	97	126		149.7		80	9.6	
		388.8	108	118		158.1		79	12	
	A	216	60	123		97.7	160	74	4.2	
		324	90	108		120.6		79	9.4	
		396	110	92		130.5		76	12.5	
	B	205.2	57	103		76.7	110	75	4.2	
		288	80	92		91.3		79	6.5	
		360	100	78		100.6		76	12.5	
	C	154.8	43	88		50.1	90	74	4.2	
		266.4	74	77		71.6		78	6.2	
		324	90	66		77.6		75	11	
100–375	J	113.4	31.5	61	1450	27.7	45	68	2.3	
		189	52.5	51		34.3		76.5	2.8	
		216	60	45		35.7		74	4.1	
	JA	126	35	49		24	30	70	2.3	
		169.2	47	44		27.3		74	2.3	
		198	55	38		28.4		72	3.5	
	JB	91.8	25.5	44		17.4	30	63	2.3	
		153	42.5	38		21.9		72	2.4	
		183.6	51	33		23.9		69	3.5	
	JC	93.6	26	33.5		13.5	18.5	63	2.3	
		133.2	37	29		15.4		68	2.3	
		170	47.2	24		17.3		64	3.2	
		259.2	72	184	2900	180.5	250	72	6	
		324	90	175		208.7		74	8	
		388.8	108	155		228		72	12	
	A	241.2	67	158		146.2	250	71	8	
		302.4	84	152		173.9		72	9.5	
		360	100	168		232.1		71	14	
B	190.8	53	125	98.4	132	66	8.5			
	237.6	66	117	110.5		68.5	9.5			
	288	80	110	130.8		66	12			

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
125-230	J	154.8	43	19	1450	10.8	18.5	74	1.6	结构形式 I Structure drawing I
		262.8	73	16		13.4		85.5	1.8	
		329.4	91.5	12		13.1		82	2.4	
	JA	155.6	43.2	16.2		9.3	15	73	1.6	
		241.2	67	13		10.1		84	1.8	
		328.9	91.5	9		10.6		76	2.4	
	JB	144	40	14		7.5	11	73	1.6	
		225	62.5	11		8.2		82	1.8	
		279	77.5	8		8.1		75	2.3	
	JC	118.8	33	12		5.5	11	70	1.8	
		198	55	9		6.3		77	1.8	
		241.2	67	7		6.2		74	2.1	
		324	90	75	2900	88.2	110	75	6	
		540	150	60		103.1		85.5	7.5	
		637.2	177	50		104.5		83	9.2	
125-290	A	324	90	64		75.2	90	75	6	
		496.8	138	52		83.7		84	6.8	
		596.2	165.6	42		85.2		80	8.4	
	B	288	80	55		59	75	73	6.8	
		450	125	43.5		65		82	7	
		579.6	161	30		63.1		75	9.2	
	C	252	70	47		46	75	70	7.2	
		414	115	35		51.9		76	7.3	
		475.2	132	28		48.3		75	8	
	J	144	40	32	1450	16.9	30	74	1.6	
		270	75	26.8		23.4		84	1.9	
		360	100	21		26		79	3.6	
	JA	144	40	26.5		14	22	74	1.6	
		241.2	67	22		17.6		82	1.7	
		324	90	17.5		19.7		78	2.8	
	JB	144	40	21.8		11.5	18.5	74	1.6	
		226.8	63	18		13.8		80	1.8	
		306	85	13		14.6		74	2.8	
	JC	144	40	17		9.5	15	70	1.7	
		207	57.5	14		10.1		78	1.8	
		266.4	74	10.5		10.2		74	2.6	
		396	110	120	2900	161.7	220	80	6.4	
		540	150	108		189		84	7.6	
		648	180	94		204.7		81	10	
125-290	A	288	80	105		109.8	160	75	6.4	
		468	130	90		139.8		82	7.1	
		558	155	80		150		81	8.8	
	B	252	70	90		84.6	132	73	6.5	
		435.6	121	77		114.1		80	7	
		540	150	62		116.8		78	8.8	
	C	252	70	71		67.6	90	72	6.9	
		414	115	57		82.3		78	7.1	
		540	150	40		78.4		75	9.1	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
125-365	J	180	50	52	1450	33.5	75	76	2	结构形式 I Structure drawing I
		313.2	87	46		46.7		84	2.1	
		432	120	38		60.4		74	3.7	
	JA	169.2	47	43.5		27	45	74	2.1	
		288	80	39		36.8		83	2.4	
		367.2	102	34		43.5		78	3	
	JB	162	45	35		20.8	37	74	2.1	
		259.2	72	30.5		26.2		82	2.2	
		324	90	27.3		31.6		76	4	
	JC	180	50	26		17.2	30	74	2.3	
		234	65	24		19.1		80	2.5	
		280.8	78	20.2		20.8		74	3	
		504	140	198.4	2900	332	450	82	8	
		630	175	189		386		84	8	
		756	210	172		431.8		82	12	
	A	432	120	164		241.1	355	80	8	
		540	150	152.8		270.7		83	8	
		648	180	145.6		313.3		82	8.5	
	B	403.2	112	129		179.3	280	79	8.2	
		504	140	124		207.5		82	9	
		604.8	168	121.6		244.2		82	9.1	
	C	374.4	104	94		124.4	160	77	8.2	
		468	130	81		129		80	10	
		561.6	156	71.2		147.1		74	12	
125-400		345.6	96	253	2900	330.7	500	72	5.8	结构形式 I Structure drawing I
		460.8	128	242.5		397.8		76.5	8	
		576	160	222		487		71.5	10.6	
	A	324	90	225		283.6	400	70	6.4	
		414	115	215		326.7		74.2	8.4	
		496.8	138	205		379.9		73	10.3	
	B	306	85	205		247.6	355	69	6.8	
		403.2	112	190		284.2		73.4	9	
		475.2	132	178		323.1		71.3	10.3	
	C	305.28	84.8	175		214	315	68	7	
		381.6	106	168		245.9		71	11	
		457.92	127.2	160		292.1		68.3	16	
125-500		180	50	84.5	1450	55.9	110	74	1.6	结构形式 I Structure drawing I
		324	90	77		82.8		82	2.5	
		396	110	70		96.7		78	4	
	A	180	50	73		48.3	90	74	1.6	
		280.8	78	67		64		80	2.1	
		324	90	63		71.2		78	3.2	
	B	180	50	61.5		40.7	75	74	1.6	
		244.8	68	57		48.7		78	1.8	
		309.6	86	52		59.2		74	3.2	
	C	187.2	52	50.5		34.7	45	74	1.7	
		216	60	48		37.1		76	1.8	
		266.4	74	42		42.3		72	2.6	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m ³ /h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
150-290		259.2	72	26.4	1450	24.5	37	76	2	结构形式 I Structure drawing I
		435.6	121	21		28.9		86	2.5	
		576	160	16		32.1		78	3.5	
	A	252	70	23		21	30	75	2.5	
		417.6	116	18		24		85	2.5	
		540	150	12.4		23.9		76	3.8	
	B	270	75	18.3		17.9	22	75	2.4	
		378	105	15		18.8		82	2.5	
		486	135	11		19.1		76	3.4	
	C	270	75	14		13.7	18.5	75	2.5	
		338.4	94	11.7		14		77	2.6	
		432	120	8		13		72	3	
150-360		252	70	44	1450	39.7	75	76	2.1	结构形式 I Structure drawing I
		450	125	38		54.7		85	2.5	
		576	160	30		58.8		80	4.0	
	A	252	70	37		33.4	55	76	2.3	
		396	110	31		40.2		83	2.4	
		540	150	24		46.4		76	4.1	
	B	252	70	30.5		27.5	37	76	2.4	
		378	105	25		32.1		80	2.6	
		486	135	18		31.3		76	3.4	
	C	252	70	24		21.6	30	76	2.5	
		338.4	94	20		23.6		78	2.6	
		432	120	14		21.6		76	3	
150-450		288	80	74	1450	80.6	132	72	2.5	结构形式 I Structure drawing I
		514.8	143	66		112.8		82	3.5	
		612	170	60		126.5		79	4.4	
	A	270	75	62.5		63.8	110	72	2.5	
		468	130	55		86.5		81	3.5	
		594	165	45		97		75	5.5	
	B	259.2	72	51		50	75	72	2.7	
		417.6	116	45		63.9		80	3	
		540	150	34		69.4		72	6.8	
	C	252	70	41		39	55	72	2.7	
		374.4	104	35		45.7		78	3.6	
		468	130	28		49.5		72	5	
150-605		306	85	117	1450	139.2	250	70	3	结构形式 I Structure drawing I
		583	162	105		205.8		81	3.8	
		720	200	96		241.3		78	5.8	
	A	306	85	102		121.4	200	70	3	
		540	150	90		165.4		80	3.7	
		648	180	80		185.7		76	5.2	
	B	295.2	82	87		99.9	160	70	3	
		493.6	135	77		130.6		78	3.4	
		576	160	70		144.4		76	4.2	
	C	288	80	70		78.4	132	70	3	
		432	120	64		99		76	3.1	
		540	150	55		115.5		70	4	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
200–320		432	120	36	1450	54.3	75	78	3.1	
		705.6	196	28		61.8		87	3.5	
		936	260	20		65.3		78	5.8	
	A	432	120	32		48.2	75	78	3.1	
		648	180	25.5		52.3		86	3.6	
		864	240	17		51.9		77	5.6	
	B	432	120	26		39.7	55	77	3.2	
		594	165	21.3		41		84	3.3	
		720	200	17		41.6		80	4.2	
	C	360	100	23		31.3	37	72	3.5	
		540	150	17.5		32.9		78	3.6	
		720	200	10		25.1		78	4.5	
200–420		432	120	60	1450	90.4	132	78	3.2	结构形式 I Structure drawing I
		712.8	198	52		117.3		86	3.8	
		961.2	267	40		130.8		80	7	
	A	414	115	50		72.2	110	78	3.5	
		640.8	178	42.5		88.2		84	3.8	
		864	240	32		95.3		79	6	
	B	360	100	43		55.4	90	76	3.7	
		594	165	35		69		82	3.8	
		792	220	25		70		77	4.8	
	C	360	100	34		43.8	75	76	3.9	
		525.6	146	28		50		80	3.9	
		684	190	20		47.7		78	4.3	
200–520		489.6	136	103	1450	180.7	280	76	2.5	
		820.8	228	94		250.1		84	3.5	
		1008	280	81		274.5		81	6.1	
	A	468	130	86		144.2	250	76	2.5	
		792	220	75		194.8		83	4	
		900	250	70		211.8		81	6.2	
	B	468	130	70		120.5	185	74	2.5	
		720	200	62		150		81	2.8	
		828	230	57		160.6		80	3.2	
	C	432	120	55		88.6	132	73	2.5	
		648	180	47.5		106.1		79	3.4	
		756	210	42.5		113.6		77	6.5	
200–670		432	120	163	1450	273.9	450	70	2.5	
		792	220	150		399.4		81	2.8	
		864	240	145		426.4		80	3.2	
	A	421.2	117	140		229.4	355	70	2.6	
		702	195	128		305.8		80	2.8	
		828	230	120		351.4		77	4	
	B	403.2	112	120		188.2	315	70	2.7	
		669.6	186	107		253.3		77	2.7	
		792	220	100		287.5		75	3.2	
	C	396	110	100		156.2	250	69	2.6	
		630	175	90		205.8		75	2.6	
		764.9	210	80		222.5		74	3.2	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
250-370		720	200	46	1450	112.7	160	80	4.1	
		1062	295	39		128.1		88	4.3	
		1368	380	30.5		142		80	6	
	A	648	180	41		95.2	132	76	4.2	
		1008	280	33.5		106.9		86	4.7	
		1296	360	24.5		113.7		76	6.2	
	B	648	180	34		80	110	75	4.3	
		936	260	27		82.9		83	4.6	
		1152	320	20.5		84.6		76	5.7	
	C	576	160	27.5		58.2	75	74	4.5	
		864	240	20		60.7		77.5	4.7	
		1008	280	16		59.3		74	5.2	
250-480		720	200	77	1450	188.7	280	80	3.8	
		1206	335	63		235.1		88	4	
		1584	440	52		273.5		82	7.6	
	A	666	185	63		148.4	220	77	3.8	
		1080	300	52		177.8		86	4	
		1440	400	40		196.1		80	5.6	
	B	576	160	53		110.8	200	75	3.9	
		1008	280	42		137.3		84	3.9	
		1296	360	33		153.3		76	4.7	
	C	576	160	43		91.1	160	74	4	
		936	260	34		107.0		81	4	
		1152	320	26		108.8		75	4.5	
250-600		828	230	130	1450	366.4	560	80	2.8	
		1224	340	117		464.2		84	3.8	
		1656	460	96		541.1		80	7.1	
	A	720	200	113		291.5	450	76	2.8	
		1152	320.6	100		376.4		83.5	3.8	
		1512	420	80		427.8		77	8.3	
	B	648	180	97		231.3	355	74	2.8	
		1080	300	83		294.1		83	3.5	
		1260	350.3	75		314.1		82	5.3	
	C	648	180	80		185.7	250	76	2.8	
		1008	280	67		224.2		82	3.4	
		1224	340	58		241.6		80	5.3	
250-800		1036.8	288	228	1450	836	1120	77	4.25	
		1296	360	216		918.4		83	4.5	
		1555.2	432	205		1058.8		82	5	
	A	967.6	268.8	205.6		677.2	900	80	4.2	
		1209.6	336	197.2		787.3		82.5	4.5	
		1451.5	403.2	182		888.1		81	5.0	
	B	898.5	249.6	184.6		571.8	800	79	4.2	
		1123.2	312	179		667.7		82	4.5	
		1347.8	374.4	165		747.7		81	5.0	

结构形式 I
Structure drawing I

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
300–300		720	200	31	1450	82.1	110	74	4.2	结构形式 I Structure drawing I
		1126.8	313	23		81.6		86.5	4.6	
		1352	380	17		76.3		82	6.2	
	A	684	190	25		62.9	90	74	4.5	
		1044	290	19		64.3		84	4.8	
		1296	360	12		54.3		78	6	
	B	720	200	20.5		54.3	75	74	4.8	
		972	270	16		51.6		82	5.1	
		1152	320	11		44.2		78	5.8	
300–435		1080	300	64	1450	241.3	315	78	4.5	
		1710	475	52.5		274.7		89	5.2	
		2070	575	45		294.9		86	6.5	
	A	1080	300	55		207.3	280	78	4.7	
		1620	450	45		229.5		86.5	5.3	
		2160	600	30		232.1		76	8.5	
	B	1080	300	44		165.9	200	78	4.9	
		1476	410	37		179.1		83	4.9	
		1836	510	28		179.4		78	7.3	
	C	1080	300	38		147	160	76	5.2	
		1350	375	27.5		128.7		78.5	6.6	
		1620	450	25		141.4		78	7.2	
300–560		1080	300	107	1450	393.3	630	80	3.9	
		1692	470	97.5		516.4		87	4.7	
		2340	650	77		591.2		83	6.5	
	A	900	250	90		294.1	450	75	4.3	
		1620	450	77		399.6		85	5.2	
		2160	600	61.5		446.6		81	6.8	
	B	900	250	74		241.8	355	75	4.6	
		1548	430	62		307.4		85	5.3	
		1888.4	524	53		332		82	7.1	
	C	972	270	60		211.7	280	75	5	
		1512	420	50		246.5		83.5	5.7	
		1980	550	37		266		75	9.3	
300–700		900	250	182	1450	594.7	1120	75	3.9	
		1836	510	167		970.9		86	4.5	
		2052	570	158		1037.7		85	4.8	
	A	936	260	164		557.4	900	75	4	
		1728	480	141		780.6		85	4.3	
		1980	550	135		877.0		83	10	
	B	900	250	132		425.6	630	76	4	
		1620	450	116		609.2		84	4.4	
		1180	500	106		626		83	6.7	
	C	900	250	108		352.9	560	75	4	
		1512	420	95		471.3		83	4.3	
		1872	520	82		522.5		80	8.2	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m ³ /h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
300-850	J	998.7	277.4	122.1	985	390.7	560	75	4.8	结构形式 I Structure drawing I
		1248.4	346.8	116.6		483.4		82	5.2	
		1498.1	416.2	102		526.7		79	6	
	JA	927.3	257.6	112		398.3	500	71	4.5	
		1159.2	322	103.6		408.8		80	6	
		1391	386.4	92.5		455		77	5.5	
	JB	881.2	244.8	98		336	400	70	4.75	
		1101.6	306	89		351.3		76	5	
		1321.9	367.2	77.7		388.5		72	6.3	
	JC	822.5	228.5	84		268.8	450	70	5	
		1028.1	285.6	79.5		309.1		72	5.3	
		1233.7	342.7	87		417.6		70	6	
		1382.4	384	270	1450	1270.6	1800	80	7.8	
		1836	510	250		1524.4		82	8.4	
		2203.2	612	220		1681.5		78.5	10	
	A	1324.8	368	242		1164.1	1600	75	8.1	
		1728	480	220		1310.5		79	8.8	
		2073.6	576	198		1471.2		76	9.8	
	B	1209.6	336	220		1006.5	1400	72	8.4	
		1656	460	190		1134.9		75.5	9.5	
		1987.2	552	168		1262.7		72	10.4	
	C	1209.6	336	180		845.9	1120	70.1	8.4	
		1512	420	167		955.1		72	9.9	
		1814.4	504	141		1002.5		69.5	11.2	
350-360		1260	350	39	1450	171.5	200	78	6	结构形式 I Structure drawing I
		1728	480	33		180.6		86	6.7	
		2160	600	26		191.2		80	7.8	
	A	1080	300	36		145	160	73	6.3	
		1692	470	27		148.1		84	7.1	
		2160	600	17		135.1		74	9.4	
	B	1080	300	29		118.4	132	72	6.5	
		1620	450	21.5		115.6		82	7	
		1980	550	15		106.4		76	8.1	
350-430	C	972	270	24		90.7	110	70	6.8	
		1548	430	16		86.4		78	7.3	
		1872	520	10		68.8		74	8.4	
		1620	450	54	1450	326.3	450	73	7.5	
		2808	780	42		371.3		86.5	8.7	
		3294	915	35		378.2		83	11.2	
	A	1728	480	45		286.1	355	74	8.1	
		2628	730	35		298.2		84	8.6	
		3024	840	30		301.2		82	10.3	
	B	1620	450	37.5		233	280	71	8.5	
		2520	700	27.5		230.1		82	8.6	
		3060	850	21		224.3		78	11.5	
	C	1620	450	30		189	220	70	8.9	
		2412	670	22		185.2		78	9.7	
		2880	800	16		169.5		74	11	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
350–510		1800	500	83	1450	496.1	630	82	6	结构形式 I Structure drawing I
		2664	740	70		580.3		87.5	6.8	
		3420	950	54		620.9		81	10.6	
	A	1620	450	73		412.8	560	78	6.8	
		2430	675	60		461.6		86	7.4	
		3240	900	43		468.4		81	10.3	
	B	1620	450	60		339.3	450	78	7.4	
		2340	650	48		364.1		84	8	
		2880	800	41		417.6		77	10.1	
	C	1620	450	46		274.2	315	74	8	
		2070	575	38		274.6		78	8.3	
		2700	750	25		255.3		72	10	
350–575		1800	500	117	1450	682.7	900	84	5.4	结构形式 II Structure drawing II
		2520	700	103		785.4		90	7	
		3060	850	88		852.7		86	10.2	
	A	1656	460	100		536.8	710	84	5.5	
		2268	630	88		610.7		89	7	
		2880	800	74		699.2		83	10	
	B	1440	400	87		426.4	560	80	5.3	
		2052	570	77		486.2		88.5	6.8	
		2880	700	67		547.3		84	9.5	
	C	1440	400	75		367.6	500	80	5.4	
		1980	550	66.5		416.9		86	6.7	
		2160	600	61		422.1		85	7.5	
350–630		1296	360	140	1450	667.7	1000	74	4.7	结构形式 II Structure drawing II
		2160	600	126		871.9		85	6.9	
		2592	720	116		998.5		82	9.5	
	A	1296	360	128		594.4	900	76	4.8	
		2016	560	116		758.1		84	6.5	
		2520	700	100		847.2		81	9.3	
	B	1188	330	118		502.3	800	76	4.6	
		1908	530	106		659.6		83.5	5.8	
		2304	640	96		730.1		82.5	7.6	
	C	1116	310	107		427.8	710	76	4.6	
		1800	500	96		563.5		83.5	5.6	
		2268	630	82		617.6		82	7.5	
D	1044	290	93.8	350.9	560	76	4.5			
	1620	450	85	457.3		82	5.1			
	2160	600	69	520.3		78	7			
350–690		1800	500	174	1480	1003.4	1400	85	5.5	结构形式 I Structure drawing I
		2520	700	155		1195.1		89	7	
		3060	850	136		1325.5		85.5	9.5	
	A	1692	470	150		822.8	1200	84	5.5	
		2340	650	135		972		88.5	7	
		2736	760	120		1051.9		85	9.5	
	B	1440	400	132		647	900	80	5.4	
		1980	550	120		739.4		87.5	6.6	
		2520	700	102		843.3		83	9.8	
	C	1440	400	113		553.9	710	80	5.5	
		2340	550	100		634.3		85	6.8	
		2160	600	90		637.8		83	7.8	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
400-525		2520	700	76	1480	636	800	82	6.8	结构形式 I Structure drawing I
		3528	980	64		694.8		88.5	8.3	
		4320	1200	52		741.5		82.5	13	
	A	2340	650	64		509.8	630	80	6.8	
		3240	900	55		554.6		87.5	8.2	
		3960	1100	44.5		581.6		82.5	11	
	B	2160	600	55		420.1	500	77	6.7	
		2970	825	47		444.6		85.5	8	
		3690	1025	37.5		471		80	12	
	C	2160	600	46		351.4	450	77	6.8	
		2880	800	40		382.5		82	8	
		3240	900	35		386		80	9.5	
	*	2160	600	34.5	985	240.1	280	84.5	3.6	
		2808	780	30		256.3		89.5	4.4	
		3600	1000	22.5		267.3		82.5	7.2	
	*A	1800	500	30		188.5	220	78	3.5	
		2664	740	25		206.1		88	4.3	
		3240	900	20		213.9		82.5	6	
	*B	1800	500	25		157.1	185	78	3.5	
		2520	700	21		168.5		85.5	4.4	
		3060	850	16.5		171.8		80	6.1	
	*C	1800	500	21		131.9	160	78	3.6	
		2340	650	18		139.8		82	4.1	
		2772	770	15		141.5		80	5.3	
400-560		1584	440	98	1450	556.2	800	76	4.6	结构形式 II Structure drawing II
		2628	730	86		724.1		85	7	
		3096	860	78		792.3		83	8.5	
	A	1512	420	91		499.6	710	75	4.6	
		2520	700	79		645.4		84	6.5	
		3024	840	69		701.5		81	8.4	
	B	1440	400	83		433.9	630	75	4.5	
		2412	670	72		563		84	6.3	
		2988	830	62		619		81.5	8.3	
	C	1386	385	76		382.4	630	75	4.5	
		2340	650	64		488.4		83.5	6	
		2880	800	52		509.8		80	8.1	
400-600		1368	380	69	1450	342.7	560	75	4.5	结构形式 II Structure drawing II
		2268	630	57		424.1		83	5.8	
		2808	780	49		480.3		78	7.3	
	A	1919	533	129.7		891.7	1250	76	4.4	
		3168	880	113		1133.6		86	7.5	
		3888	1080	98		1265		82	10.5	
	B	1800	500	119		767.5	1120	76	4.3	
		2988	830	103		980.2		85.5	6.8	
		3960	1100	82		1078.4		82	11	
	C	1800	500	108		670.1	1000	79	4.3	
		2880	800	93		858.1		85	6.5	
		3780	1050	70.6		908.4		80	10.3	
	D	1620	450	100		580.4	900	76	4	
		2700	750	84		726.6		85	6	
		3420	950	64		745		80	8.5	
		1530	425	90		493.4	800	76	4	
		2520	700	74		597.4		85	5.6	
		3060	850	60		625		80	7	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
400-665		2160 3600 4320	600 1000 1200	145 122 105	1480	1066.1 1343.9 1453.2	1600	80 89 85	6.3 9 13	结构形式 I Structure drawing I
	A	2160 3240 3960	600 900 1100	123 106 90		904.4 1062.8 1169.3	1250	80 88 83	6.3 8.5 12	
	B	2160 2880 3600	600 800 1000	104 93 78		764.7 843.2 932.5	1000	80 86.5 82	6.4 8 12	
	C	2160 2700 3240	600 750 900	88 77 69		643 690.4 761	800	80.5 82 80	6.5 8 10.5	
	*	2340 2880 3456	650 800 960	64 58 50	985	458.3 502.7 547.2	630	89 90.5 86	2.8 3.9 5.8	
	*A	2160 2700 3240	600 750 900	55 49 41		371.9 404.8 435.9	500	87 89 83	2.8 3.7 5.7	
	*B	1980 2520 3060	550 700 850	47 41 34		294.7 323.4 354.2	400	86 87 80	2.9 3.7 6	
	*C	1800 2160 2592	500 600 720	41 38 34		245.1 259.9 292.7	315	82 86 82	3 3.5 4.8	
400-675		1440 2232 2970	400 620 825	79 69.2 55	985	387.2 477.9 556	560	80 88 80	2.8 3.7 7	结构形式 II Structure drawing II
	A	1440 2052 2664	400 570 740	67.5 60 48		330.8 385.3 435.2	450	80 87 80	2.8 3.8 6.4	
	B	1368 1872 2376	380 520 660	58 52 42.8		270 308.2 346.1	400	80 86 80	2.8 3.8 5.6	
	C	1332 1728 2088	370 480 580	50 45 38		226.7 258.2 273.5	315	80 82 79	3 3.5 6	
400-705		1440 2232 2736	400 620 760	78 69 60	985	382.3 476.6 535.3	560	80 88 83.5	2.8 3.7 5.5	结构形式 I Structure drawing I
	A	1440 2052 2520	400 570 700	70 60 52		343.1 385.3 432.5	450	80 87 82.5	2.9 3.7 5.4	
	B	1080 1800 2340	300 500 650	60 53 43		245 302 340.3	355	72 86 80.5	2.7 3.5 5.5	
	C	1080 1800 2070	300 500 575	52 43.5 39		212.4 260 274.8	280	72 82 80	2.8 3.7 4.8	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
400-900		1620	450	155	985	911.7	1400	75	3	结构形式 II Structure drawing II
		2880	800	135		1203.2		88	6.4	
		3348	930	123		1304		86	11	
	A	1584	440	133		764.9	1250	75	3	
		2592	720	118		957.4		87	5.6	
		3060	850	108		1071.4		84	10	
	B	1440	400	116		606.5	1000	75	3	
		2340	650	103		763.2		86	4	
		2700	750	95		851.8		82	7	
	C	1368	380	101		501.6	800	75	3	
		2160	600	90		630.2		84	3.6	
		2772	770	77		726.5		80	10	
400-935		1800	500	153	985	937.5	1400	80	3	结构形式 I Structure drawing I
		2880	800	135		1203.2		88	6.5	
		3348	930	124		1314.6		86	11	
	A	1800	500	131		802.6	1120	80	3	
		2700	750	116		980.3		87	6	
		2952	820	110		1028.2		86	8	
	B	1620	450	114		628.6	900	80	3	
		2340	650	103		758.8		86.5	4.2	
		2520	700	99		790		86	5	
	C	1620	450	98		540.4	710	80	3	
		2160	600	90		645.6		82	3.7	
		2520	700	82		703.4		80	5.6	
500-520		2304	640	33.5	985	256.3	280	82	3.2	结构形式 II Structure drawing II
		3168	880	25		245.1		88	4	
		4032	1120	20		264.5		83	6.7	
	A	2304	640	30.4		232.6	250	82	3.4	
		3096	860	24		232.5		87	4.5	
		3960	1100	16		213		81	6.8	
	B	2304	640	26.3		201.2	220	82	3.6	
		3024	840	22		210.6		86	4.3	
		3852	1070	14.5		190.1		80	6.8	
	C	2160	600	25		183.8	200	80	3.7	
		2952	820	19.6		185.3		85	4.3	
		3744	1040	12.5		157.3		81	7.1	
	D	2160	600	22		161.7	185	80	3.9	
		2880	800	17.3		161.5		84	4.5	
		3180	1000	11		134.8		80	6.3	
500-585		3132	870	44	985	441.5	500	85	4.5	结构形式 I Structure drawing I
		4140	1150	37.5		469.7		90	5.6	
		4968	1380	30		477.5		85	8	
	A	3096	860	36		357	400	85	5	
		3780	1050	32		370.1		89	5.5	
		4572	1270	26		385.3		84	7.3	
	B	2880	800	30.8		294.5	355	82	4.5	
		3600	1000	27		304.2		87	5.4	
		4320	1200	22		315.6		82	7.3	
	C	2880	800	25.8		246.7	280	82	4.6	
		3240	900	24		249.1		85	5	
		3960	1100	19		256.1		80	6.5	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	
500-650		2520	700	53.7	990	460.6	630	80	3.9	结构形式 II Structure drawing II
		3600	1000	47		520.6		88.5	5.7	
		4500	1290	35		553.3		80	9.6	
	A	2412	670	51		418.7	560	80	3.8	
		3420	950	45		481.7		87	5.6	
		4392	1220	33		481.3		82	8.5	
	B	2268	630	48		370.5	500	80	3.6	
		3240	900	42		430.9		86	5	
		3807	1190	30		437.5		80	8.3	
	C	2160	600	44		323.5	400	80	3.5	
		3015	850	37		362.7		85	4.8	
		3456	1080	28		370.5		80	6.4	
	D	2088	580	37.5		266.5	315	80	3.4	
		2700	750	34		297.6		84	4	
		3348	930	26		296.3		80	5.4	
500-685		2160	800	67.5	985	630.2	900	84	4.4	结构形式 I Structure drawing I
		4140	1150	58		718.5		91	5.5	
		5040	1400	48		784.3		84	8.2	
	A	2520	700	58		497.5	710	80	4.2	
		3780	1050	50		571.8		90	5.4	
		4680	1300	41.5		622.2		85	7.8	
	B	2520	700	48		411.7	560	80	4.2	
		3528	980	42.5		461.3		88.5	5.5	
		4320	1200	34.5		494.9		82	8	
	C	2160	600	43		341.8	450	74	4.3	
		3240	900	37		379.6		86	5.2	
		3960	1100	30		404.4		80	7.1	
500-710		2520	700	89	994	744.8	1120	82	3.5	结构形式 II Structure drawing II
		3960	1100	78		934.6		90	4.6	
		5040	1400	65		1074.8		83	6.7	
	A	2520	700	83		694.6	1000	82	3.6	
		3960	1100	73		884.5		89	5.2	
		5040	1400	58		959.1		83	9	
	B	2520	700	76		628.3	900	83	3.8	
		3600	1000	68		757.5		88	4.8	
		4680	1300	56		870.3		82	7.8	
	C	2340	650	67		527.1	710	81	3.5	
		3240	900	60		630.2		84	4.5	
		3960	1100	52		692.3		81	6	
	D	1800	500	58		394.8	560	72	3.6	
		2808	780	50.3		486.8		79	4	
		3600	1000	41		550.6		73	5.4	
500-800		2700	750	97	994	880.5	1250	81	3.6	
		4500	1250	83		1130.1		90	6.8	
		5400	1500	73		1219.9		88	10	
	A	2700	750	85		771.6	1000	81	3.7	
		4050	1125	73		914.9		88	5.6	
		5400	1500	53		974.2		80	11.4	
	B	2700	750	79		717.1	800	81	3.8	
		3600	1000	66		752.3		86	5.4	
		4500	1250	53		773.2		84	8.1	
	C	2700	750	65		597.4	710	80	4	
		3492	970	57		645.3		84	5.7	
		4050	1125	51		685.9		82	7.1	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m ³ /h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
500-835		2520	700	112	985	926	1400	83	4.1	结构形式 I Structure drawing I
		3744	1040	98		1104.1		90.5	5.2	
		4680	1300	83		1244.5		85	8	
	A	2160	600	97.5		716.9	1120	80	4.2	
		3420	950	85		884.5		89.5	5.2	
		4104	1140	75		969		86.5	7	
	B	1800	500	85		563	900	74	4	
		3168	880	73		715.6		88	5	
		3960	1100	61		802.2		82	8	
	C	2160	600	71		518.8	710	80.5	4.2	
		2880	800	64		583.6		86	5	
		3600	1000	53		649.5		80	7.5	
500-860		3600	1000	132	994	1504.7	2000	86	4.3	结构形式 II Structure drawing II
		5076	1410	116		1781.6		90	6.1	
		6480	1800	97		1967.5		87	10.8	
	A	3150	875	116		1170.7	1600	85	4.3	
		4500	1250	102		1404.4		89	5.6	
		5400	1500	90		1521.2		87	8	
	B	2700	750	106		939	1250	83	4.5	
		4050	1125	91		1153.6		87	4.6	
		4860	1350	80		1245.6		85	6.8	
	C	2700	750	90		797.3	1120	83	4.6	
		3600	1000	80		922.7		85	4.5	
		4680	1300	62		1013		78	7.9	
500-870		3600	1000	110	985	1268.7	1800	85	5.1	结构形式 I Structure drawing I
		5184	1440	97.5		1512.6		91	6.7	
		6480	1800	81		1681.6		85	10.3	
	A	3240	900	95		986.1	1400	85	5.1	
		4680	1300	84.5		1196.6		90	6.3	
		5760	1600	72		1328.7		85	9	
	B	3240	900	80.5		866.2	1120	82	5.2	
		4320	1200	72.5		963.7		88.5	6.2	
		5040	1400	65		1037.3		86	8.2	
	C	2952	820	70		703.4	900	80	5.1	
		3960	1100	63		790		86	6	
		4680	1300	56		844.6		84.5	7.8	
500-1015		2520	700	180	985	1525	2200	81	4.1	结构形式 I Structure drawing I
		3744	1040	160		1864.4		87.5	5.2	
		4320	1200	148		2024.6		86	7	
	A	2520	700	153.5		1276.8	1800	82.5	4.2	
		3384	940	140		1482.9		87	5	
		3960	1100	127		1601.8		85.5	6.5	
	B	2160	600	135		992.6	1400	80	4.1	
		3024	840	120		1149.1		86	5.2	
		3600	1000	110		1268.7		85	6.5	
	C	2160	600	116		852.9	1120	80	4.1	
		2880	800	105		963.1		85.5	5	
		3240	900	97.5		1024.1		84	6	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
500-1050		3240	900	183	985	2018.3	3000	80	5.1	结构形式 I Structure drawing I
		5184	1440	160		2538		89	6.5	
		6480	1800	137		2878.1		84	10.2	
	A	2916	810	157		1558.4	2500	80	5.1	
		4680	1300	130		1882.7		88	6.2	
		6120	1700	113.5		2306.9		82	11.5	
	B	2880	800	136		1333.3	2000	80	5.2	
		4320	1200	120		1604.2		88	6.4	
		5400	1500	101		1811.3		82	9.8	
	C	2880	800	116.5		1142.1	1600	80	5.2	
		3960	1100	106		1352.8		84.5	6.2	
		4860	1350	88		1455.8		80	9	
600-560		3600	1000	31.5	985	386	450	80	5.3	结构形式 II Structure drawing II
		4716	1310	26		383.8		87	7.8	
		5400	1500	21		386		80	10.5	
	A	3330	925	29.5		334.4	355	80	5.1	
		4428	1230	23		326.2		85	7.6	
		5400	1500	17		301.2		83	12.6	
	B	3240	900	24		268	280	79	5.1	
		4050	1125	19		252.4		83	7.2	
		4950	1375	14		230.1		82	11.2	
	C	2700	750	22		224.6	250	72	4.6	
		3600	1000	17		205.7		81	6.2	
		4320	1200	12.5		188.5		78	7.8	
600-600		3780	1050	46	985	591.9	710	80	5.3	结构形式 I Structure drawing I
		5580	1550	37		624.7		90	7	
		6912	1920	26		596.8		82	10.8	
	A	3960	1100	37		486.6	560	82	5.4	
		5400	1500	30		501.3		88	6.9	
		6480	1800	22		479.3		81	10	
	B	3960	1100	30		399.4	450	81	5.4	
		5040	1400	25.5		409.3		85.5	6.8	
		6120	1700	18		384.6		78	9.8	
	C	3960	1100	25		334.9	400	80.5	5.5	
		4680	1300	22		341.9		82	6.4	
		5400	1500	18		330.8		80	8	
600-630		3330	925	49	990	555.4	710	80	4.3	结构形式 II Structure drawing II
		4500	1250	42.5		585.2		89	5.4	
		5670	1575	32.5		627.2		80	9.8	
	A	3150	875	43		449.8	560	82	4.3	
		4320	1200	36.5		487.9		88	5.6	
		5310	1475	27		488		80	9	
	B	3150	875	35.5		371.3	450	82	4.3	
		4050	1125	29.6		379.6		86	5.7	
		4950	1375	22		375.4		79	8	
	C	2700	750	28		270.8	355	76	4.3	
		3600	1000	25		291.7		84	5	
		4500	1250	17.3		268.3		79	7.4	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m ³ /h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
600-705		3600	1000	69.5	985	851.7	1120	80	5.1	结构形式 I Structure drawing I
		5580	1550	58		973.8		90.5	7	
		6840	1900	47.5		1040.9		85	10.2	
	A	3600	1000	58		710.7	900	80	5.2	
		5040	1400	50		771		89	6.3	
		6480	1800	39		834.2		82.5	10	
	B	2880	800	51		555.5	710	72	5.2	
		4680	1300	42.5		615.5		88	6.5	
		5760	1600	35		661.4		83	9	
	C	2880	800	43		475	560	71	5.2	
		4320	1200	37		506.1		86	6	
		5400	1500	29		533		80	8.5	
600-710		2880	800	69	960	676.4	900	80	4	结构形式 II Structure drawing II
		4626	1285	58.5		828		89	6.5	
		5400	1500	51.5		870.5		87	11	
	A	2880	800	59		571.2	800	81	4	
		4320	1200	50		676.1		87	5.6	
		5400	1500	40		717.3		82	11	
	B	2880	800	51		493.8	630	81	4	
		4050	1125	43		557.9		85	5	
		5040	1400	33		559.1		81	8.6	
	C	2880	800	41		396.9	500	81	4	
		3744	1040	35		429.9		83	4.5	
		4680	1300	26.8		437.9		78	6.8	
600-860		4320	1200	126	994	1723.6	2240	86	5	结构形式 I Structure drawing I
		6660	1850	102.6		2067.6		90	8.7	
		7920	2000	96		2139		88	12	
	A	4320	1200	110		1487.4	2000	87	5.2	
		6120	1700	93		1741.5		89	8.6	
		6840	1900	85		1819.9		87	13	
	B	4320	1200	93		1302.5	1600	84	6.4	
		5400	1500	84		1419.8		87	8.2	
		6480	1800	74		1554.6		84	13.5	
	C	3600	1000	85		1082.2	1400	77	5	
		5040	1400	75		1196.9		86	7.8	
		6120	1700	67		1329.3		84	14	
600-885		4500	1250	114	985	1643.5	2240	85	5.8	结构形式 I Structure drawing I
		6480	1800	100		1939.2		91	7.2	
		8100	2250	82.5		2141		85	11.5	
	A	4500	1250	96		1384	1800	85	5.9	
		5940	1625	87		1540		90	7.1	
		7200	2000	74		1687.1		86	10	
	B	3600	1000	85		1068.3	1400	78	5.5	
		5400	1500	74.5		1230.9		89	6.9	
		6300	1750	66		1316.6		86	9	
	C	3600	1000	73		917.5	1200	78	5.6	
		4950	1375	65		995.7		88	6.6	
		6300	1750	52		1101.4		81	10.2	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
600–1075		4500	1250	190	985	2739.3	4000	85	5.7	结构形式 I Structure drawing I
		6480	1800	170		3314.9		90.5	7.2	
		8100	2250	144		3737		85	11.8	
	A	3600	1000	168		2058.8	3150	80	5.5	
		5940	1650	149		2678.1		90	7.2	
		7200	2000	128		2952.7		85	10	
	B	3600	1000	144		1764.7	2500	80	5.6	
		5400	1500	127		2110.3		88.5	7.1	
		6750	1875	106		2376.2		82	11	
	C	3600	1000	123		1507.3	2000	80	5.7	
		4950	1375	111		1739.9		86	6.9	
		5940	1625	98		1881		83	9	
700–600		5040	1400	35.4	980	599.8	710	81	5.7	Structure drawing I
		6480	1800	30		608.5		87	7.2	
		7560	2100	25		627.6		82	11.5	
	A	5040	1400	32		542.2	630	81	5.7	
		6336	1760	27		548		85	7	
		7200	2000	24		573.8		82	10	
	B	5040	1400	29		491.4	560	81	5.7	
		6120	1700	26		522		83	7.0	
		7200	2000	22		539.2		80	10	
	C	4320	1200	28		401.7	560	82	5.1	
		5904	1640	24		476.3		81	6.8	
		6840	1900	20.6		498.3		77	9	
700–710		4680	1300	54	960	917.6	1000	75	6.2	结构形式 II Structure drawing II
		6516	1800	44		892.4		87	8	
		8470	2200	33		868		82	11.4	
	A	4680	1300	48		755.2	900	81	6.2	
		6264	1740	40		802.7		85	7	
		7380	2050	32		774.8		83	9.4	
	B	4680	1300	44		700.9	800	80	6.2	
		5976	1660	36.5		715.6		83	7.3	
		7200	2000	28		686.2		80	9.2	
	C	4680	1300	40		645.3	710	79	6.2	
		5760	1600	33.5		648.7		81	7	
		6840	1900	26		613		79	8.5	
700–800		5040	1400	92	980	1521.3	2000	83	5.6	Structure drawing II
		7380	2050	80		1806.5		89	8.8	
		8640	2400	70		1893.1		87	14	
	A	4680	1300	80		1258.7	1800	81	5.6	
		6984	1940	68		1486.5		87	7.6	
		8280	2300	57		1530.1		84	12.5	
	B	4680	1300	68		1069.9	1400	81	5.6	
		6552	1820	58		1217.5		85	6.8	
		8280	2300	44		1240.1		80	12.5	
	C	4680	1300	56		881.1	1120	81	5.6	
		6012	1670	48		946.8		83	6.1	
		7200	2000	38.8		939.2		81	8.3	

CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m ³ /h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
700-980		6480	1800	132	985	2806.5	3550	83	7	结构形式 I Structure drawing I
		8640	2400	117		3041.9		90.5	8.8	
		10080	2800	103		3287.7		86	11.6	
	A	5760	1600	115		2283.4	3150	79	6.6	
		7920	2200	100		2423.4		89	8.6	
		9360	2600	88		2803.9		80	10	
	B	5760	1600	96		1882.3	2500	80	6.8	
		7200	2000	87.5		1949.6		88	8.2	
		8640	2400	75		2262.4		78	11.5	
	C	5760	1600	81		1588.2	2000	80	7	
		6840	1900	74		1621.6		85	8.3	
		7560	2100	67.5		1781.6		78	10	
	*	4500	1250	82.5	740	1263.7	1800	80	4.1	
		7560	2100	70		1575		91.5	5.5	
		9000	2500	60.5		1704.4		87	7.6	
	*A	4500	1250	70		1072.3	1400	80	4.2	
		6840	1900	60		1241.8		90	5.5	
		8550	2375	50		1369.6		85	7.8	
	*B	4500	1250	59		903.7	1200	80	4.3	
		6300	1750	52		1013.8		88	5.2	
		8100	2250	40.5		1102.9		81	8.5	
	*C	4500	1250	50		765.9	1000	80	4.3	
		5940	1625	45		819.3		87.5	5	
		7200	2000	37.5		896.7		82	7	
800-800		7200	2000	33	725	779.5	900	83	5	结构形式 II Structure drawing II
		9000	2500	27		769.4		86	7	
		10800	3000	19		689.9		81	11	
	A	6480	1800	31.2		688.2	800	80	4.8	
		8640	2400	24.3		672.6		85	7.3	
		10080	2800	16.6		562.5		81	9	
	B	6480	1800	28		610	710	81	4.8	
		8280	2300	22.3		598.6		84	6	
		9720	2700	15.3		512.6		79	8	
800-900		5760	1600	26.2	725	540.7	630	76	4.7	结构形式 II Structure drawing II
		7920	2200	19.8		514.5		83	5.6	
		9360	2600	13		424.8		78	7.5	
	A	7200	2000	51.6		1204.4	1400	84	5.1	
		9000	2500	46		1281.1		88	6.3	
		10800	3000	38.5		1364.2		83	9.4	
	B	6840	1900	48		1090.3	1250	82	5.1	
		8640	2400	42.2		1154.5		86	6.1	
		10080	2800	36.5		1192.8		84	7.6	
	C	6480	1800	43.6		938.3	1120	82	5.1	
		8280	2300	38.5		1021.3		85	5.6	
		10440	2900	30.4		1094		79	8.4	
	D	5760	1600	41		814	1000	79	5	
		7920	2200	35		898.6		84	5.4	
		10080	2800	27		950.2		78	7.6	
		5760	1600	36		714.8	900	79	5	
		7452	2070	31		757.9		83	5.1	
		9360	2600	25.6		826		79	6.7	

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m³/h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
800-990		7200 9468 11520	2000 2630 3200	72 64 52	725	1700.9 1854.1 1919.2	2240	83 89 85	4.2 6.2 10.1	结构形式 II Structure drawing II
	A	6480 9396 11160	1800 2610 3100	65.6 56 44.7		1429.1 1647 1617.2	1800	81 87 84	4 6 9.2	
	B	6120 8640 10440	1700 2400 2900	59.5 50.5 41		1224.2 1365.7 1404.4	1600	81 87 83	4 5.1 7.8	
	C	6120 8280 9720	1700 2300 2700	52.7 45 38.5		1126 1193.7 1242.8	1400	78 85 82	4 5 6.5	
900-970	J	7920 10764 13680	2200 2990 3800	29.25 23.9 17	490	760 778.4 736.4	900	83 90 86	4.2 5 5.9	
	JA	8107.2 10134 12160.8	2252 2815 3378	25.7 22.2 17.9		667.5 688.4 689.3	800	85 89 86	4.5 4.8 6	
	JB	7845.1 9806.4 11767.6	2179.2 2724 3268.8	23.5 20 15.2		597.7 606.9 586.8	710	84 88 83	4.2 4.5 6	
		10368 12960 15552	2880 3600 4320	38 34 25	590	1247.6 1333.3 1275.6	1600	86 90 83	5 6 8.5	
	A	9792 12240 14688	2720 3400 4080	37.5 32.5 25		1190.4 1217.2 1176.4	1400	84 89 85	5 6 8	
	B	9446.4 11808 14169.6	2624 3280 3936	34 29.5 22.5		1041.2 1077.9 1046	1250	84 88 83	5 6 9	
900-1030	J	8640 11520 15120	2400 3200 4200	32 28 18.5	485	875.5 976 928.9	1120	86 90 82	3.6 4.5 6.2	
	JA	8640 10800 12960	2400 3000 3600	27 25 21		721.9 826.1 861.8	1000	88 89 86	3.5 4.3 5.5	
	JB	8352 10440 12528	2320 2900 3480	26.5 23 17.5		726.1 751.6 719.3	900	83 87 83	3.8 4.4 5.6	
		10800 13860 17280	3000 3850 4800	49 41 32	590	1656.5 1719.4 1751	2000	89 90 86	5.2 6.3 8.1	
	A	10512 13140 15768	2920 3650 4380	46 37 30		1646.078 1487.662 1533.613	1800	80 89 84	5.2 6.5 8.5	
	B	9684 12096 14580	2690 3360 4050	39 34 27		1254.304 1287.356 1291.637	1400	82 87 83	5.2 6.8 8.7	


CYS型单级双吸中开离心泵

泵型号 Type		流量 Capacity		扬程 Head	转速 Speed	轴功率 Shaft power	配套功率 Motor power	效率 EFF	汽蚀余量 (NPSH) _r	结构形式 The structural form
		(m ³ /h)	(l/s)	(m)	(r/min)	(kw)	(kw)	(%)	(m)	form
900-1050	J	8640	2400	44.5	490	1203.5	1400	87	3.5	结构形式 II Structure drawing II
		11520	3200	38		1302.9		91.5	4.3	
		14040	3900	31		1378.2		86	6.5	
	JA	8640	2400	39		1054.7	1400	87	4	
		10800	3000	35.5		1153.7		90.5	4.3	
		12960	3600	29.5		1210.6		86	6.2	
	JB	8208	2280	36		957.9	1120	84	3.6	
		10260	2850	31		984.2		88	4	
		12312	3420	26		1076.2		81	7	
		10800	3000	63	590	2117.6	2500	87.5	5.6	
		13680	3800	55		2227.1		92	6.2	
		17280	4800	42.5		2352.9		85	8.2	
	A	10080	2800	56		1766.9	2500	87	4.5	
		12600	3500	51		1916.7		91.3	6	
		15120	4200	50		2287.5		90	7.2	
	B	9648	2680	51		1558.1	2000	86	5.3	
		12060	3350	45		1660.6		89	5.8	
		14472	4020	37.5		1728.5		85.5	7.3	
1000-1170	J	11340	3150	21.7	372	76.1	900	880	2.8	结构形式 II Structure drawing II
		14040	3900	18.4		764.7		92	3.5	
		16740	4650	13.4		710.3		86	4.8	
	JA	9720	2700	20.5		653.7	800	83	2.8	
		12960	3600	18		694.3		91.5	3.6	
		16200	4500	13		674.7		85	4.5	
	JB	10080	2800	20.5		662	800	85	3.4	
		12600	3500	17		641		91	3.5	
		15120	4200	14		662.6		87	4.2	
		13680	3800	40	490	1693.4	1800	88	5	
		17100	4750	34		1721		92	6.2	
		20520	5700	27		1734.2		87	7.7	
	A	12988.8	3608	37		1521.8	1600	86	5	
		16236	4510	31.1		1494.6		92	5.4	
		19483.2	5412	25		1524.6		87	7.5	
	B	12902.4	3584	33		1332.7	1600	87	5	
		16128	4480	28.5		1375.5		91	5.7	
		19353.6	5376	21.5		1349		84	8.3	


附:带“*”为相同型号的泵,不同的模型。

9. 性能曲线(Performance Curve)


CYS 80-210 2900 r/min

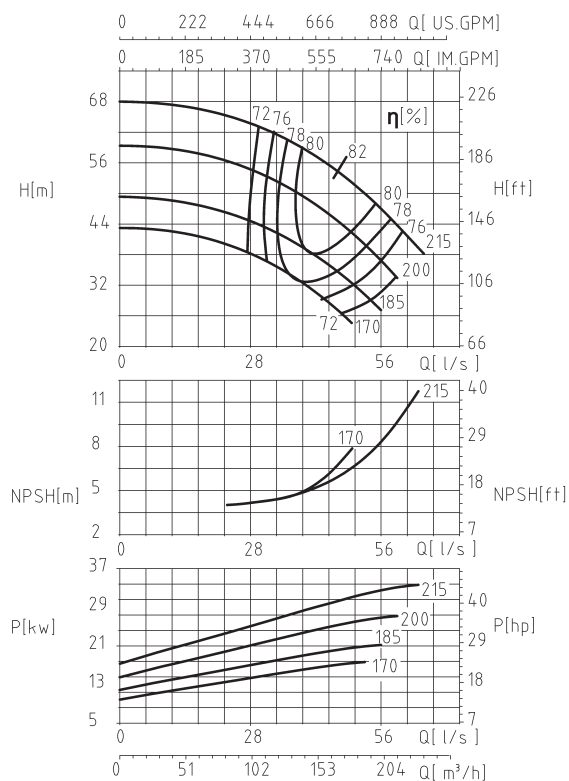


CYS 80-210J 1450 r/min

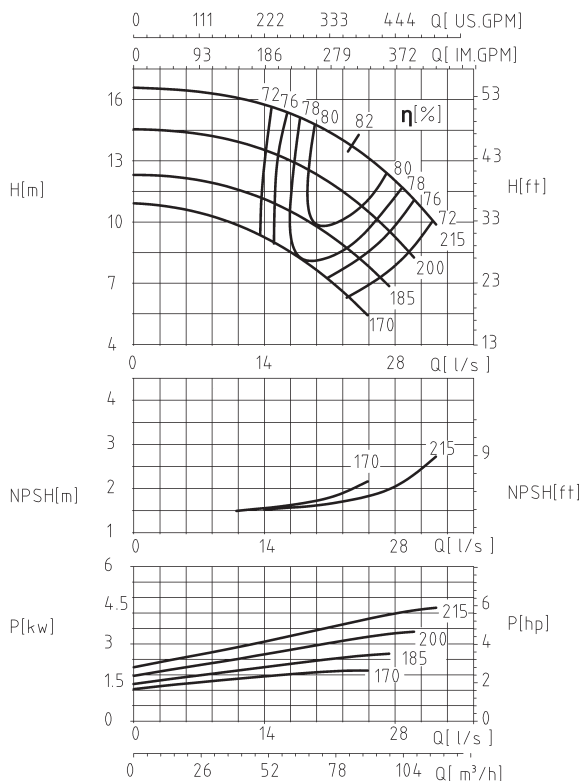


CYS 80-270 2900 r/min

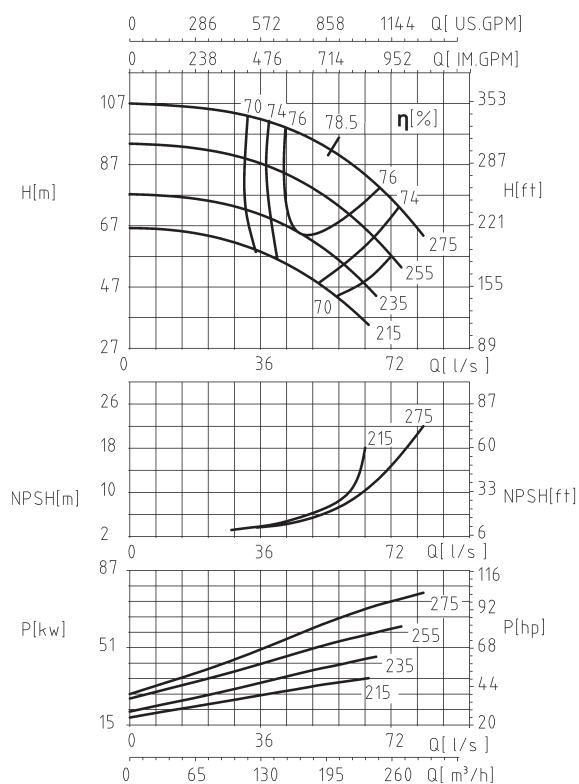


CYS 80-270J 1450 r/min

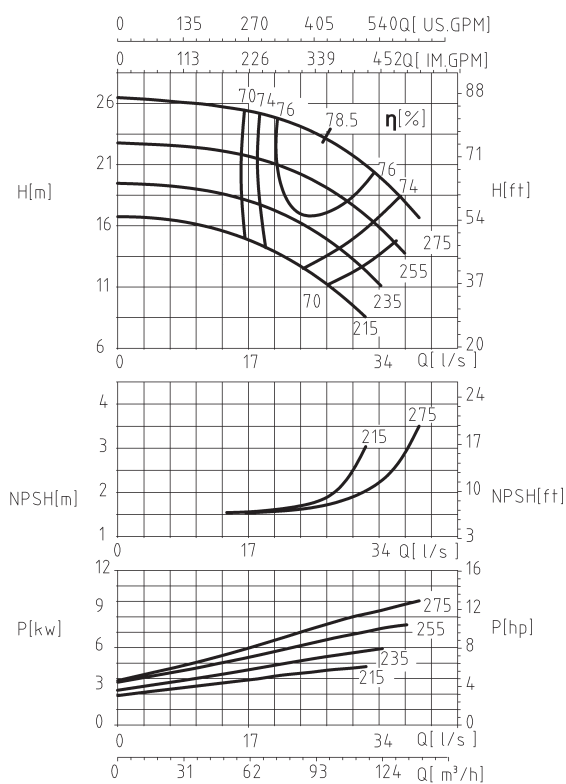


CYS 80-370 2900 r/min

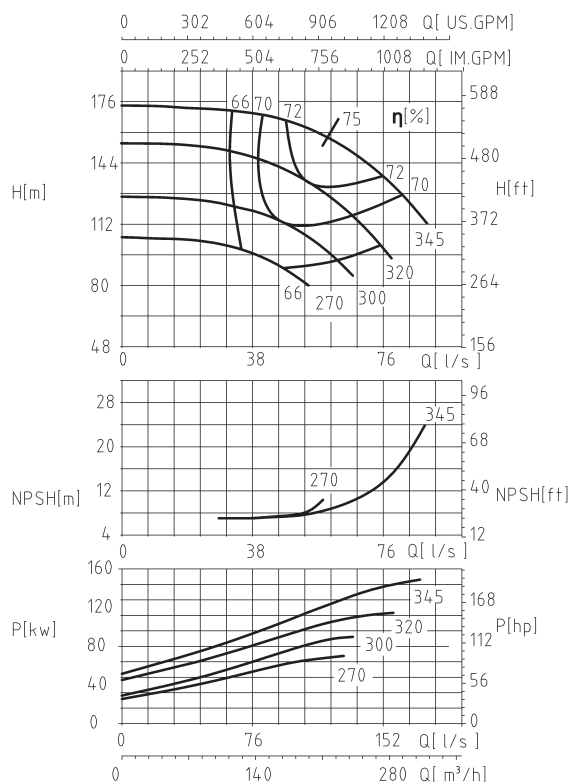


CYS 80-370J 1450 r/min

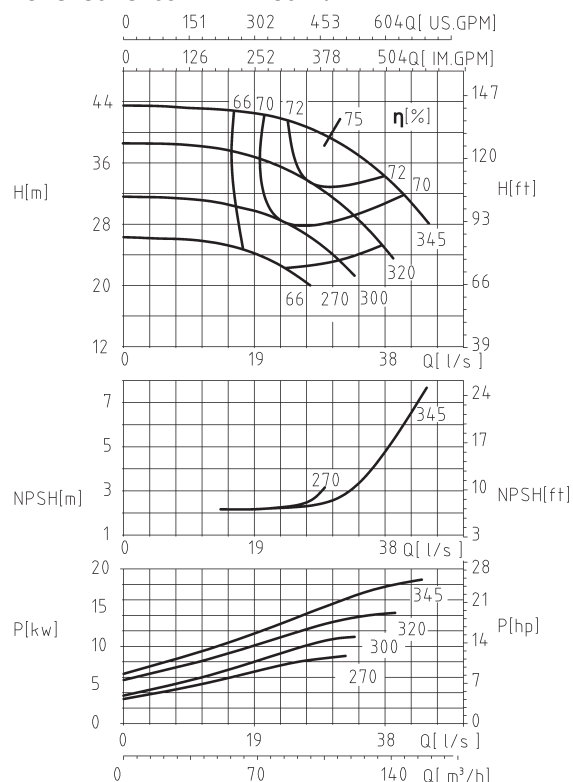


CYS 100-250 2900 r/min

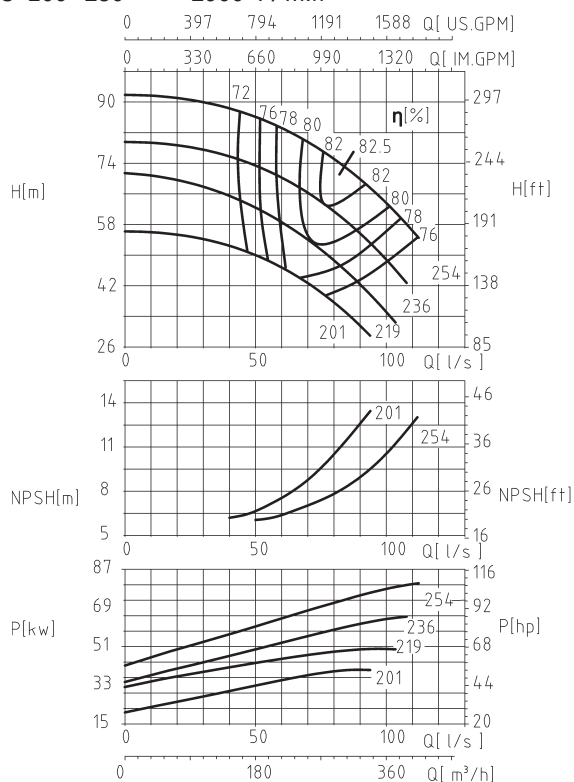


CYS 100-250J 1450 r/min

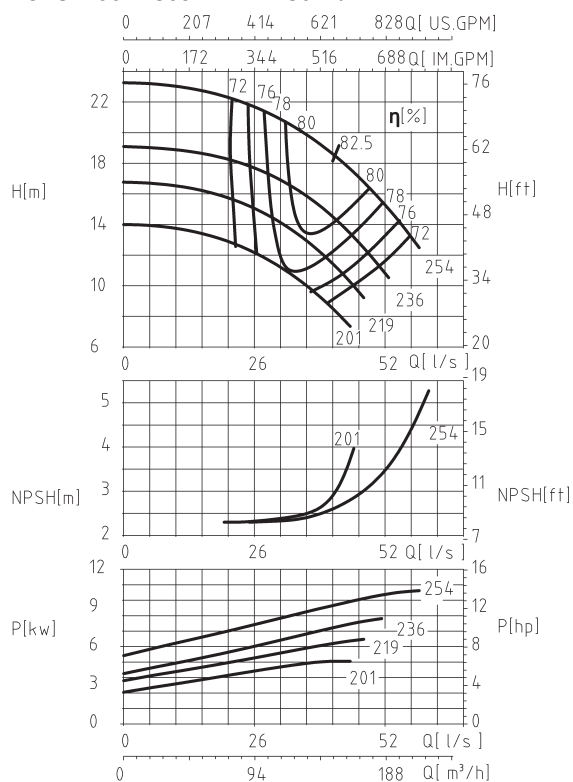


CYS 100-310 2900 r/min

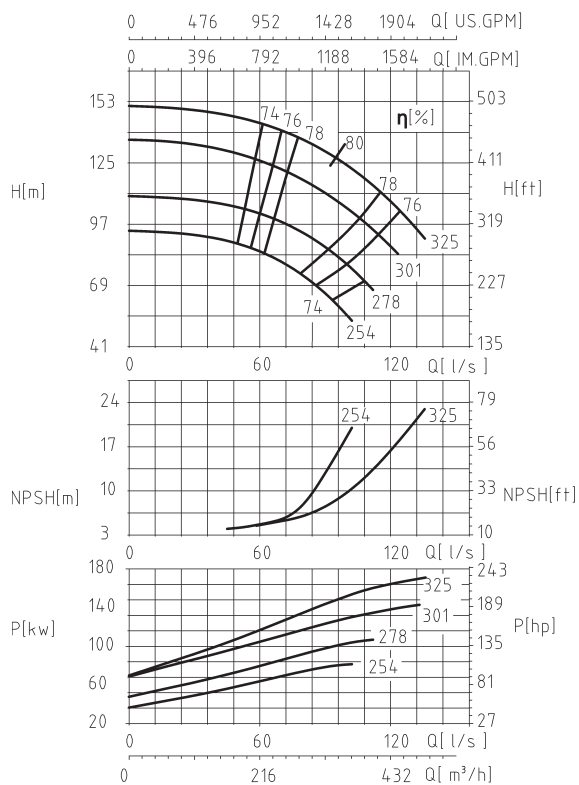


CYS 100-310J 1450 r/min

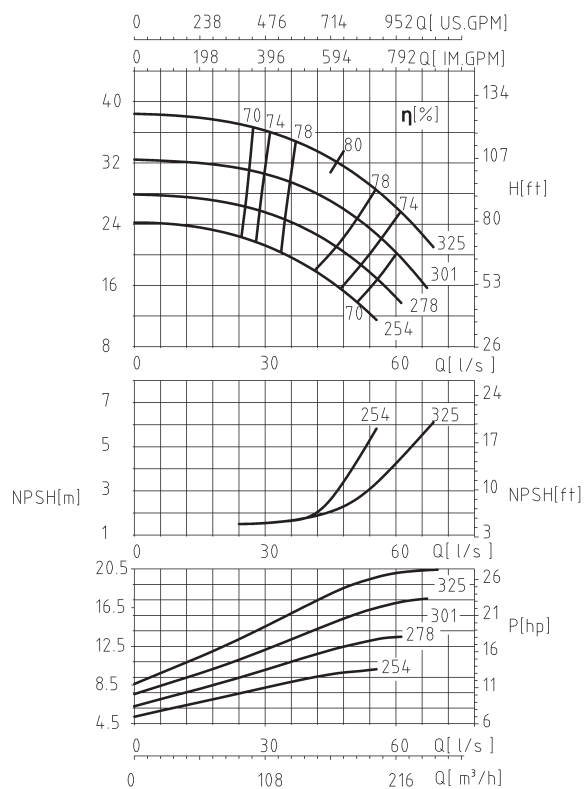


CYS 100-375J 1450 r/min

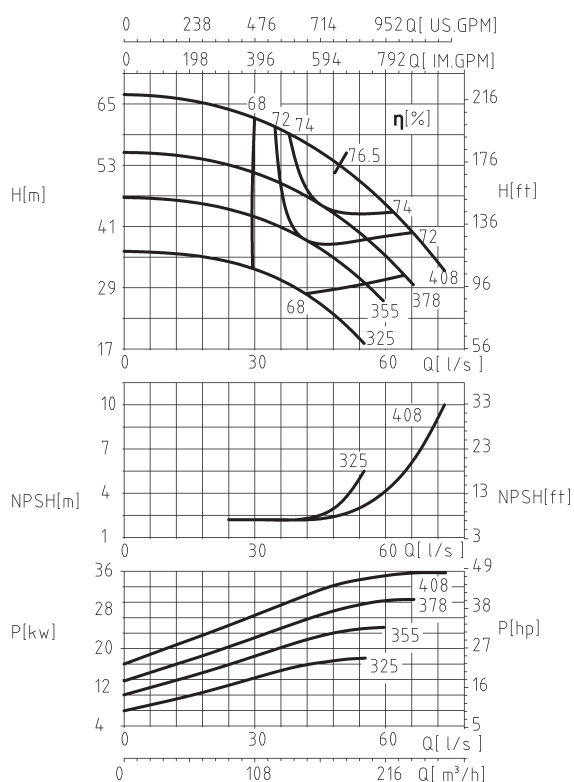


CYS 100-375 2900 r/min

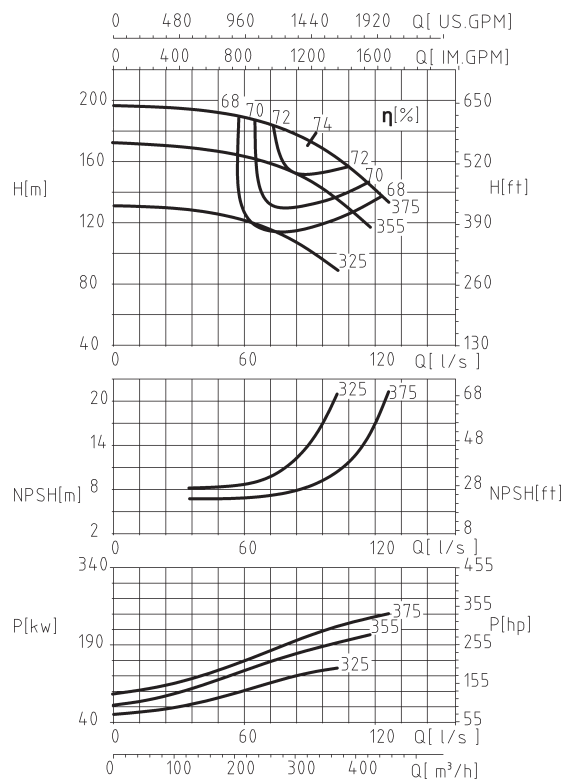


CYS 125-230 2900 r/min

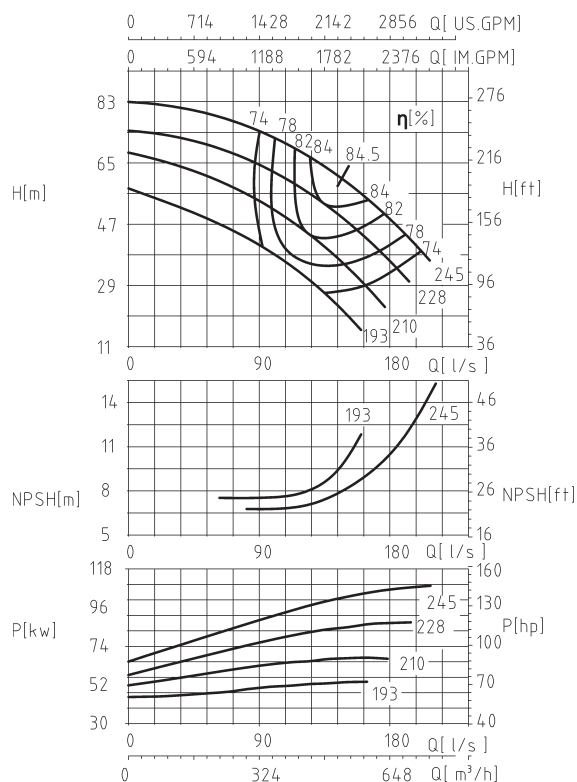


CYS 125-230J 1450 r/min

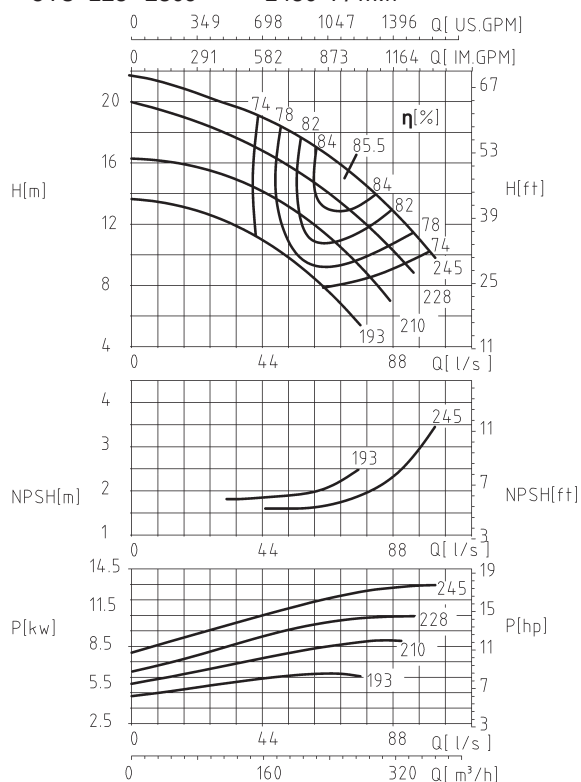


CYS 125-290 2900 r/min

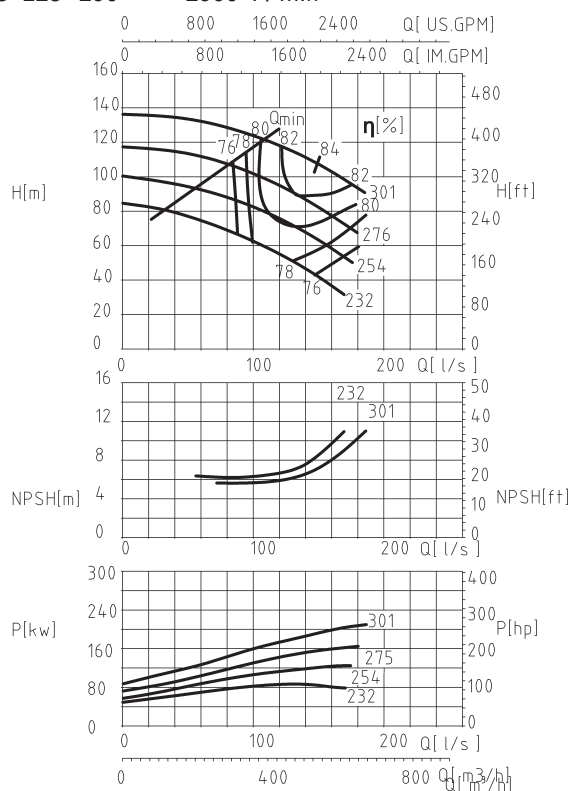


CYS 125-290J 1450 r/min

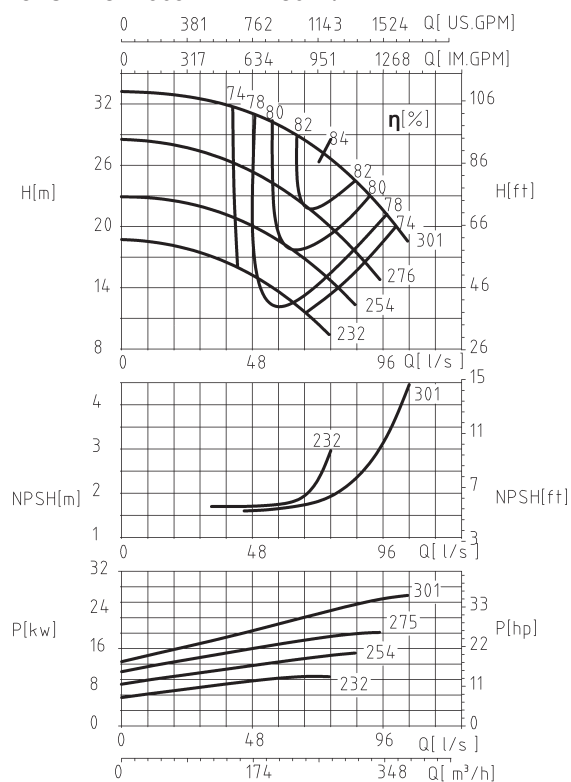


CYS 125-365 2900 r/min

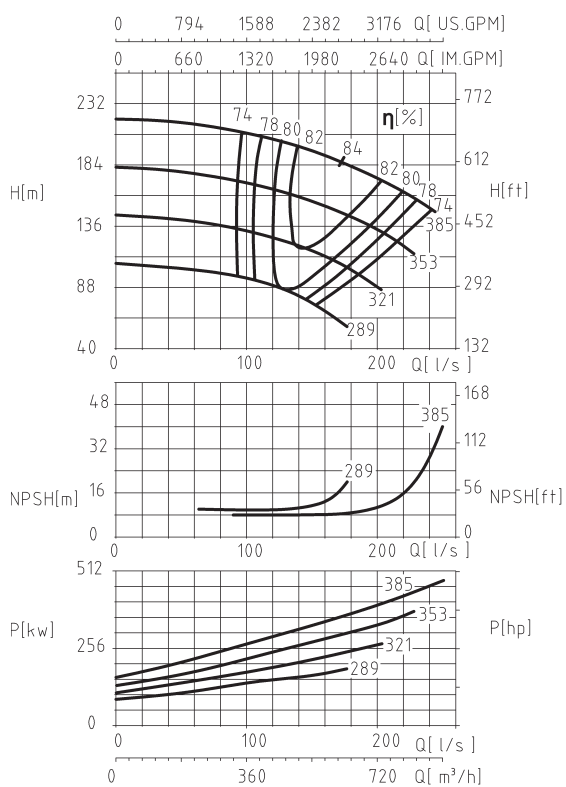


CYS 125-365J 1450 r/min

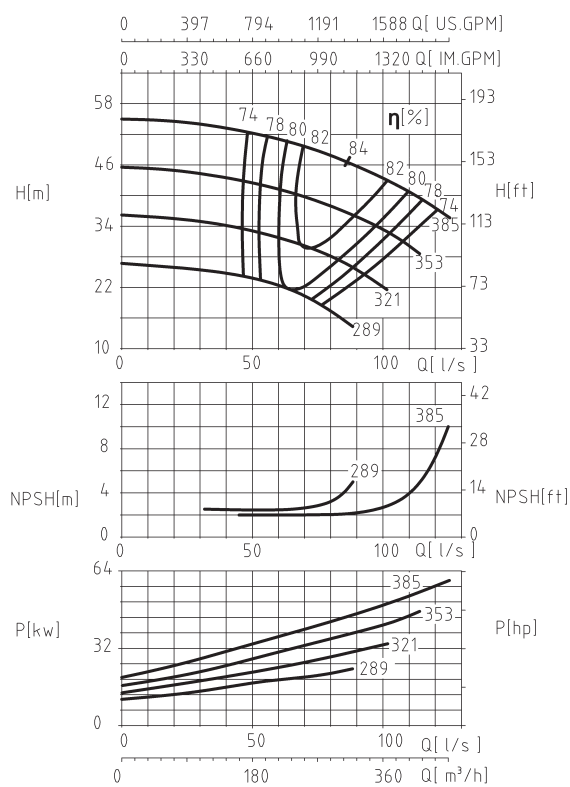


CYS 125-400 2900 r/min

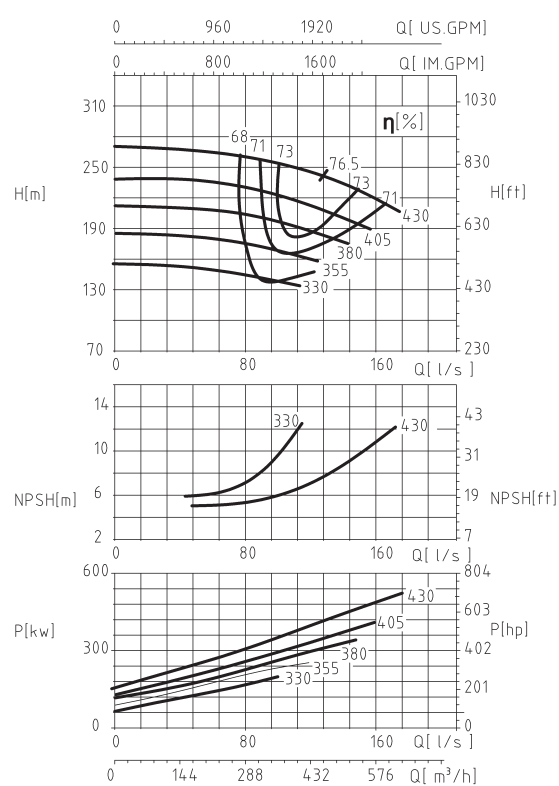


CYS 125-500 1450 r/min

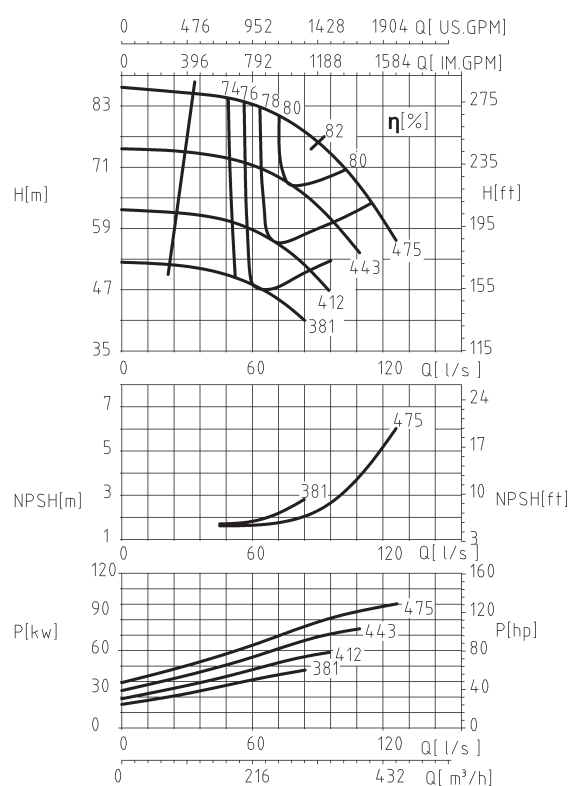


CYS 150-290 1450 r / min

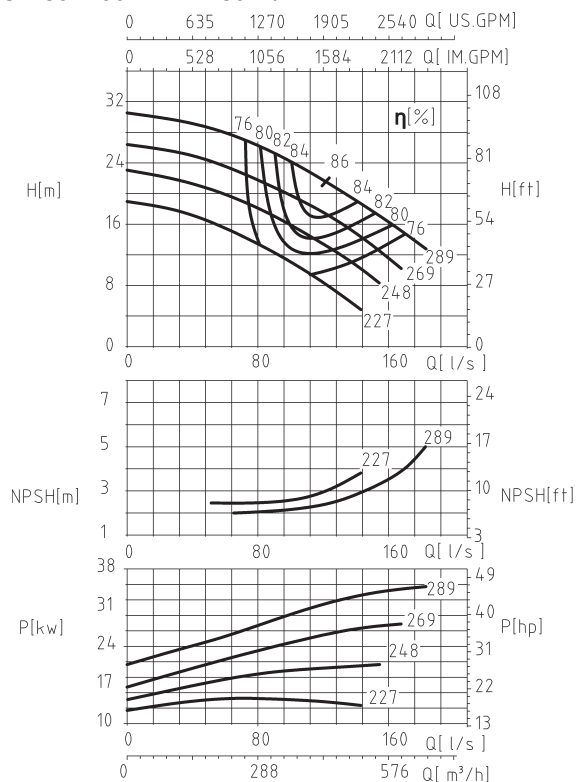


CYS 150-360 1450 r / min

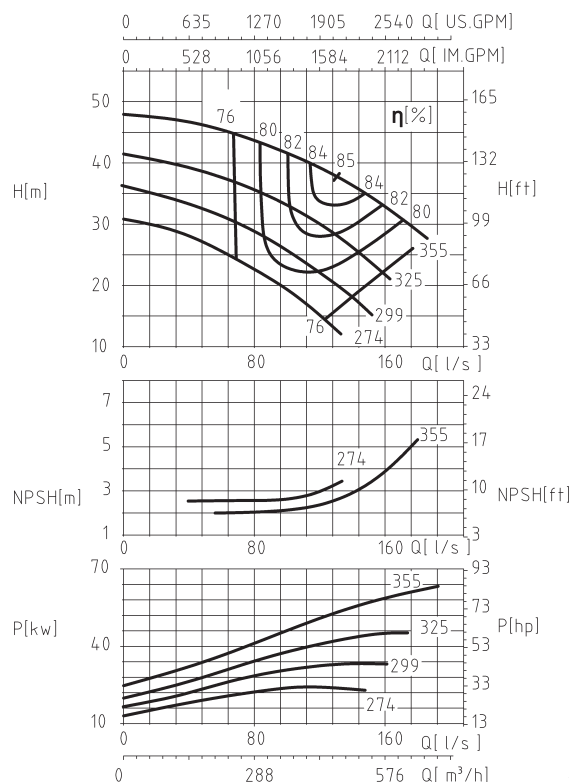


CYS 150-450 1450 r / min

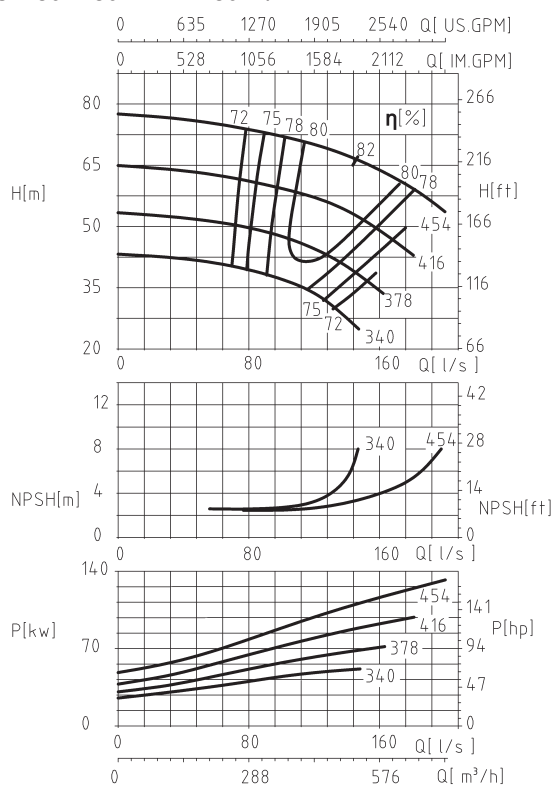


CYS 150-605 1450 r / min

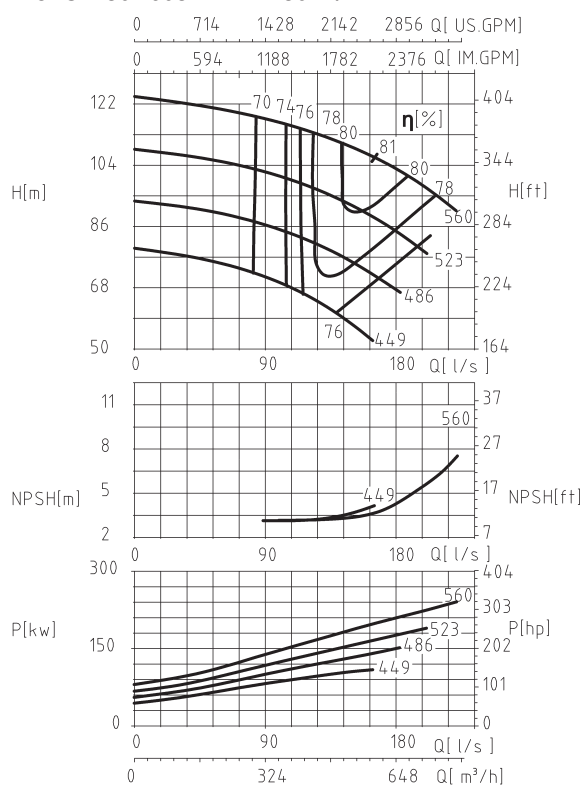


CYS 200-320 1450 r/min

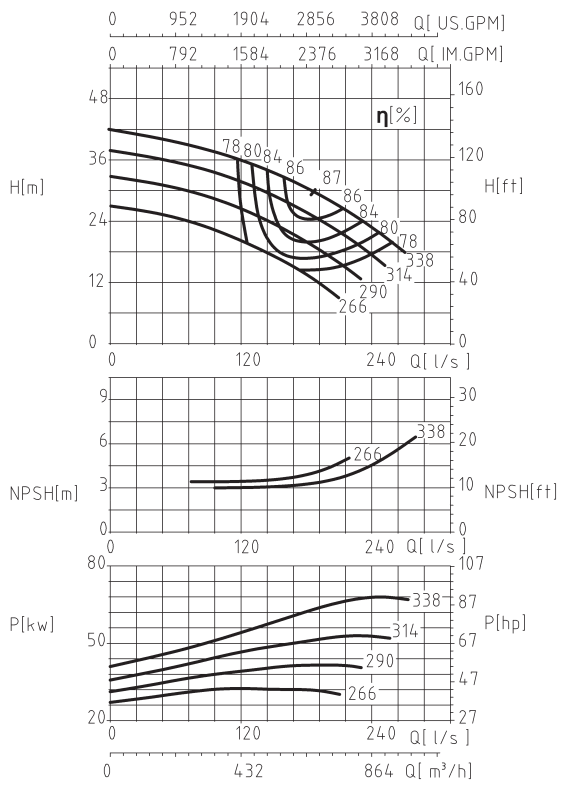


CYS 250-370 1450 r/min

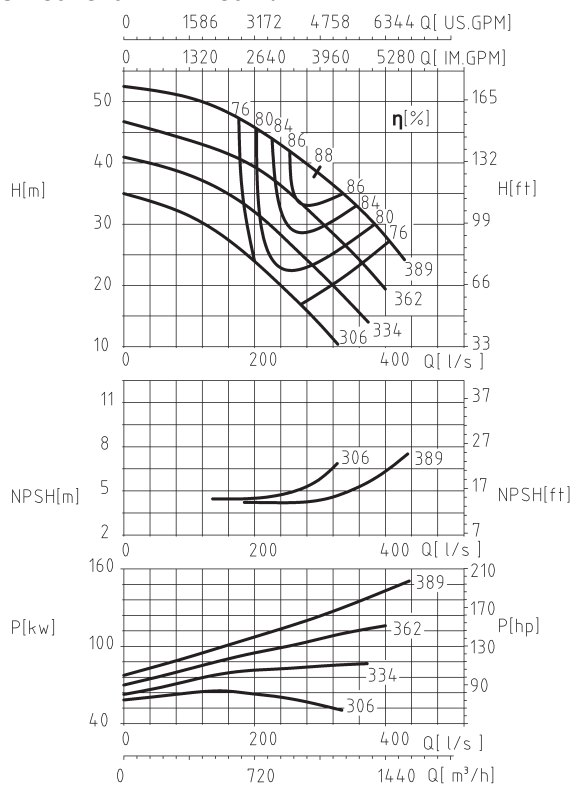


CYS 250-480 1450 r/min

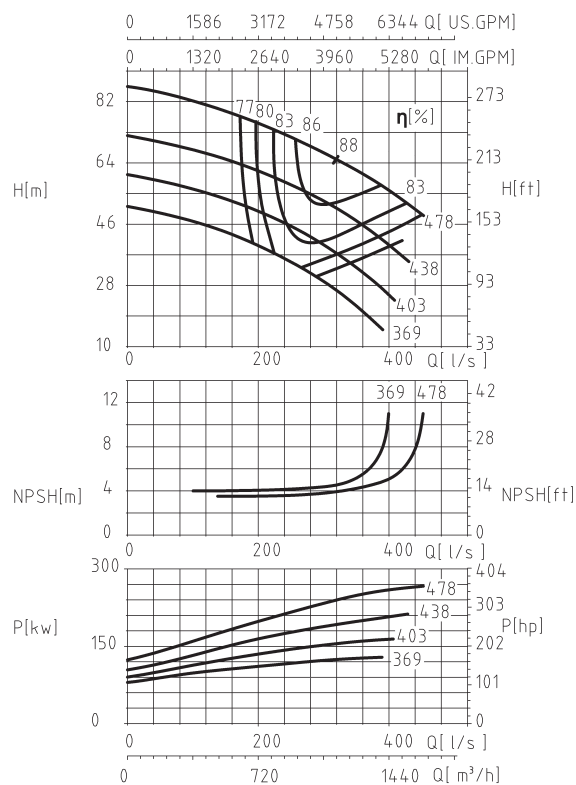


CYS 250-600 1450 r/min

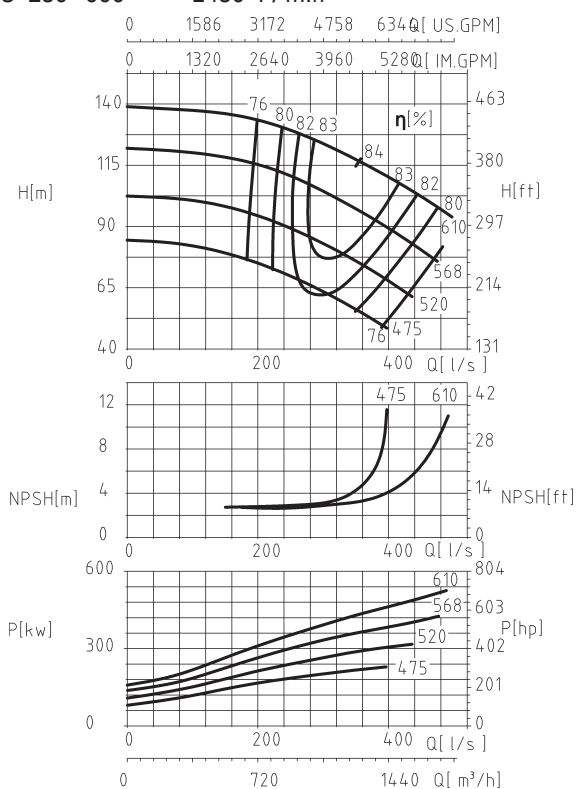


CYS 250-800 1450 r/min

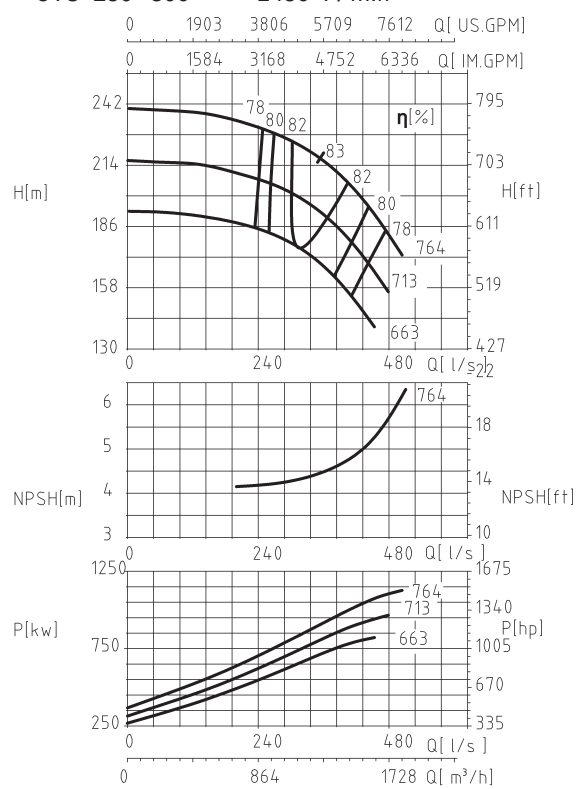


CYS 300-300 1450 r/min

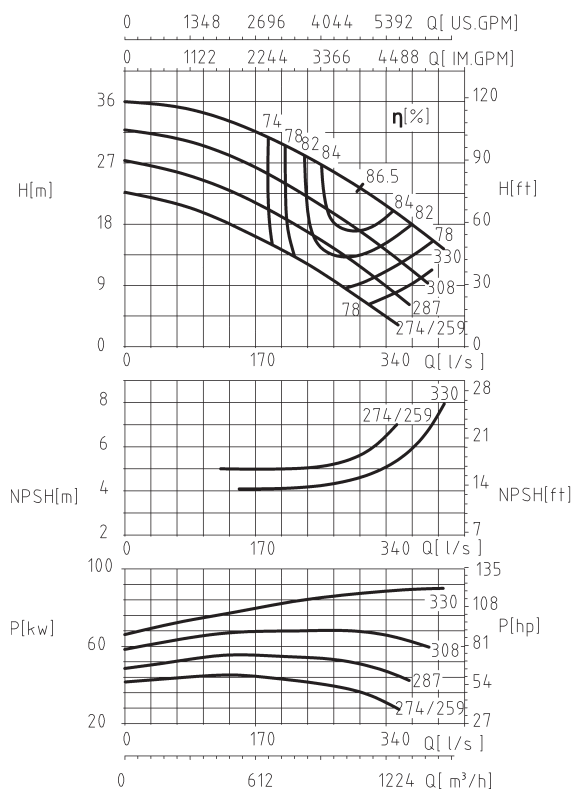


CYS 300-435 1450 r/min

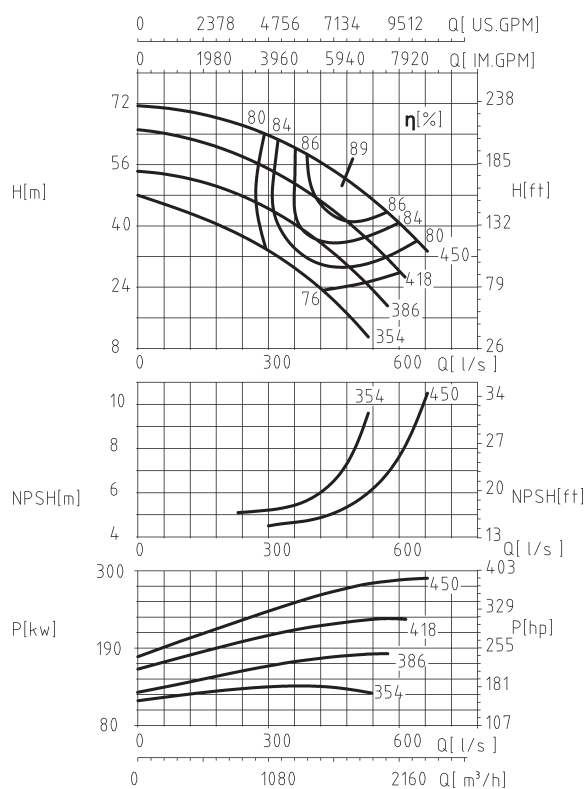


CYS 300-560 1450 r/min

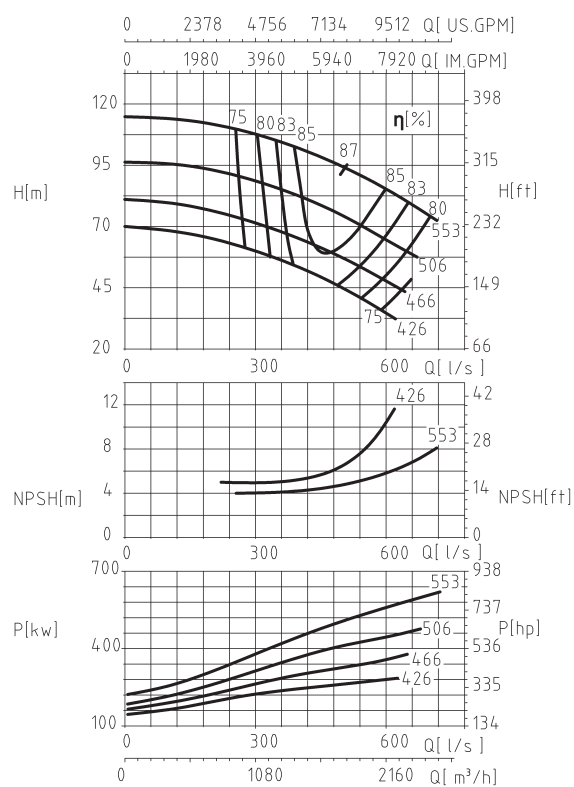


CYS 300-700 1450 r/min

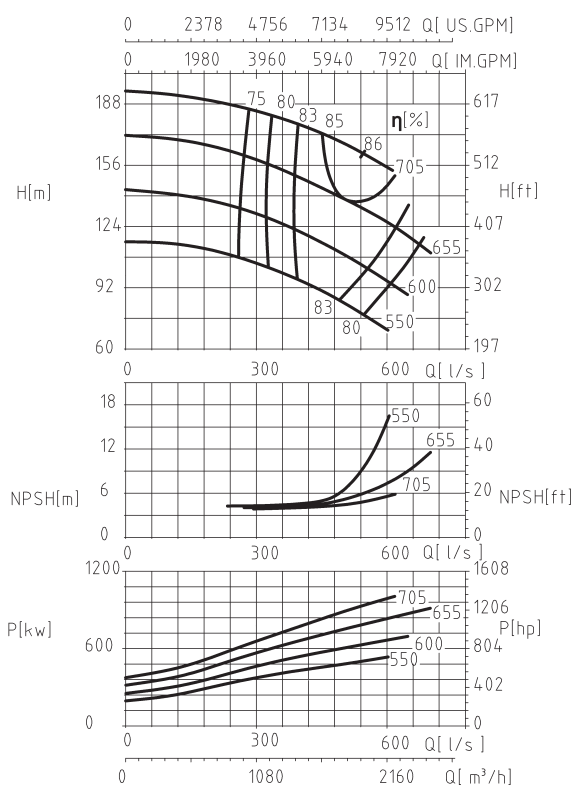


CYS 300-850 1450 r/min

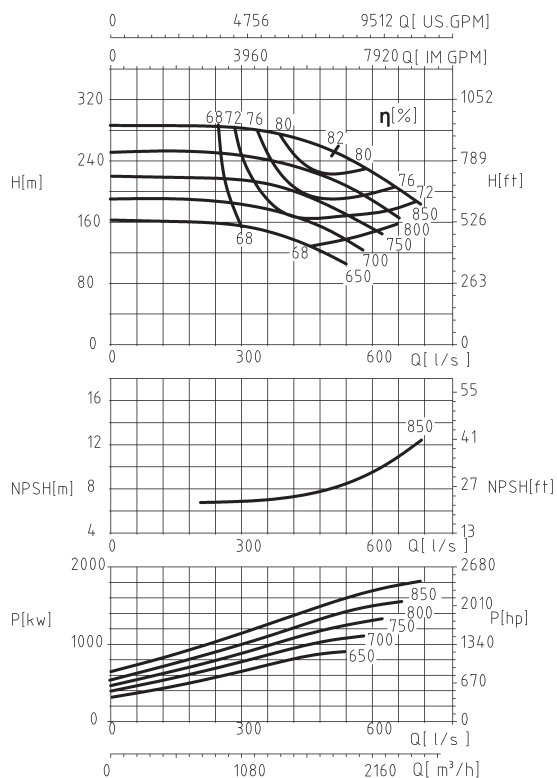


CYS 300-850J 985 r/min

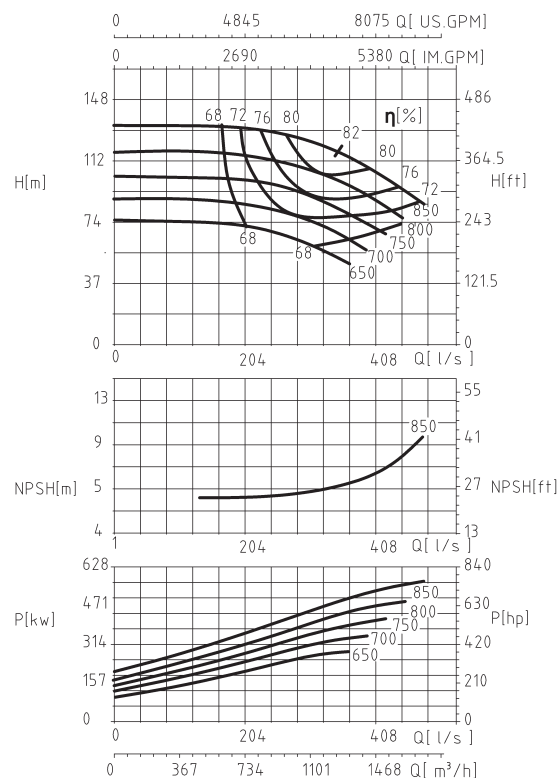


CYS 350-360 1450 r/min

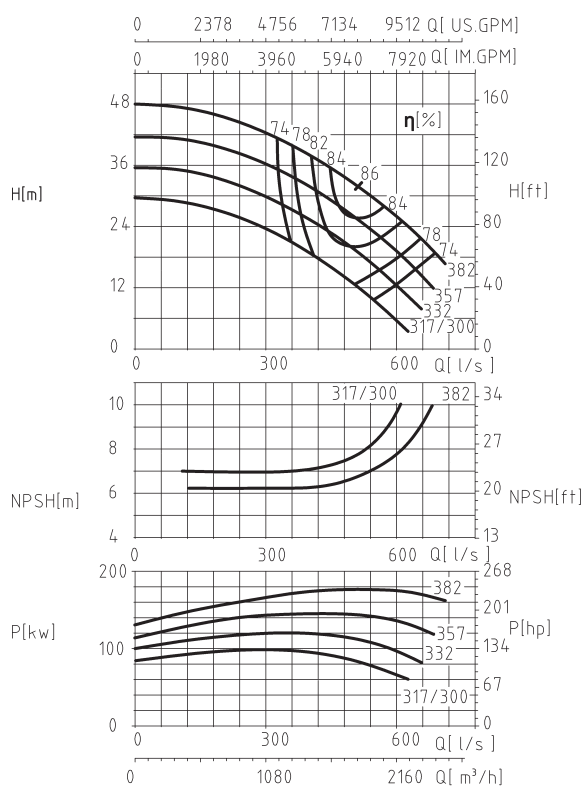


CYS 350-430 1450 r/min

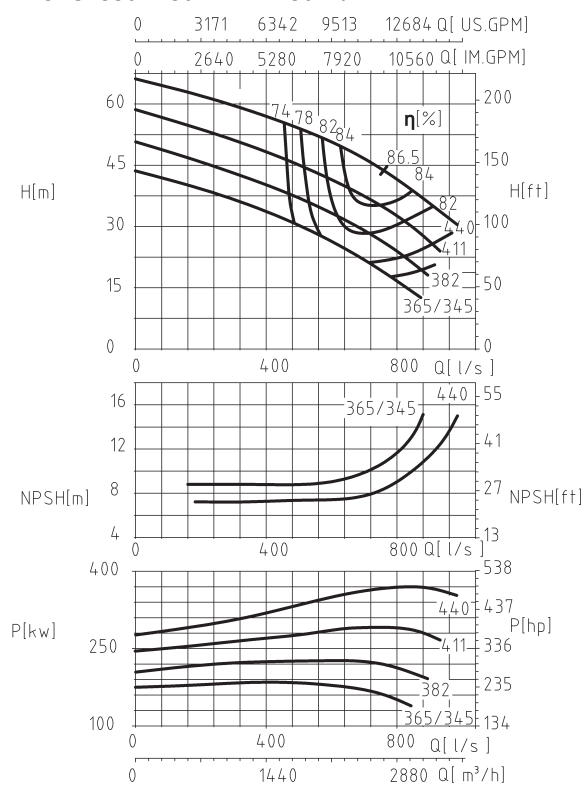


CYS 350-510 1450 r/min

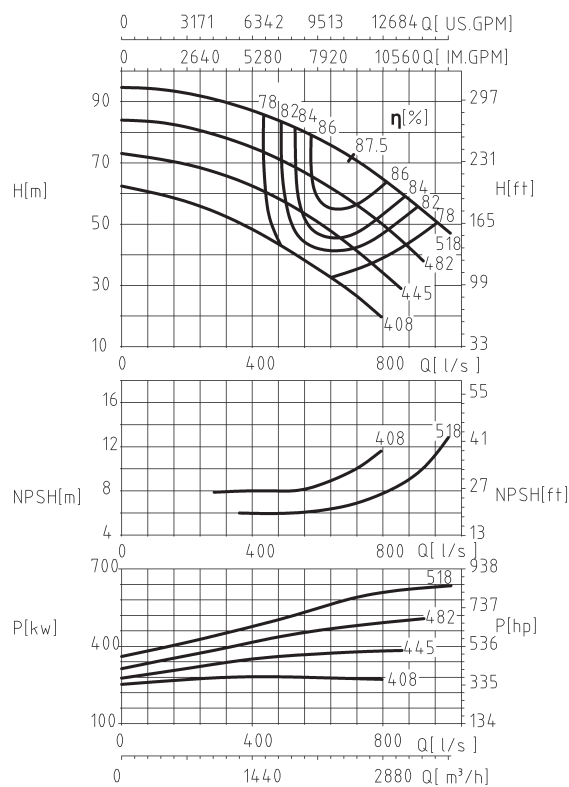


CYS 350-575 1450 r/min

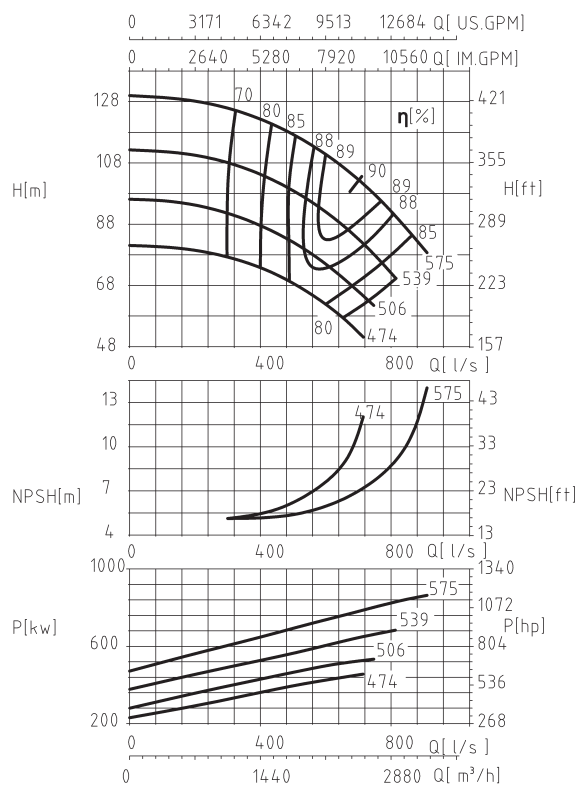


CYS 350-630 1450 r/min

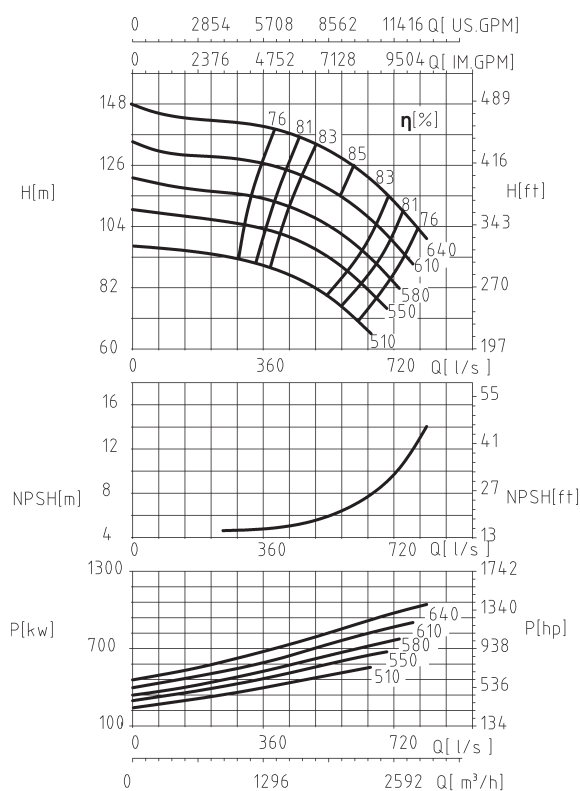


CYS 350-690 1480 r/min

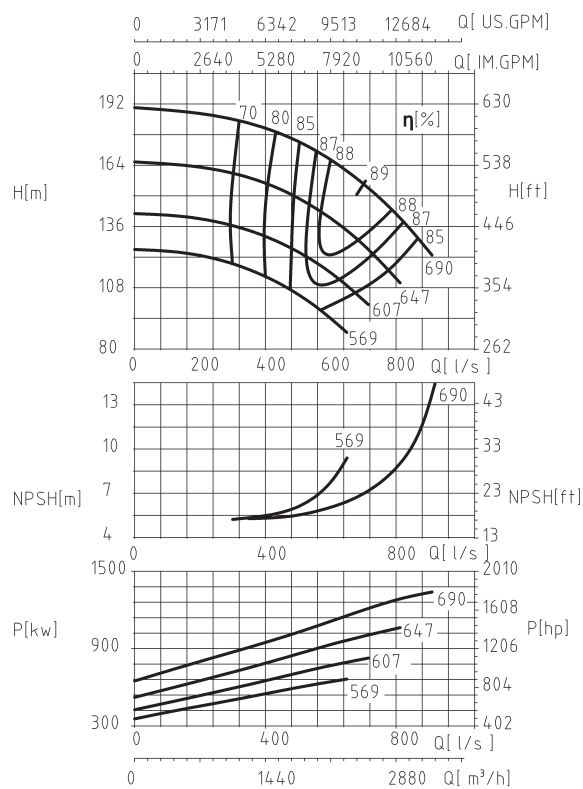


CYS 400-525 1480 r/min

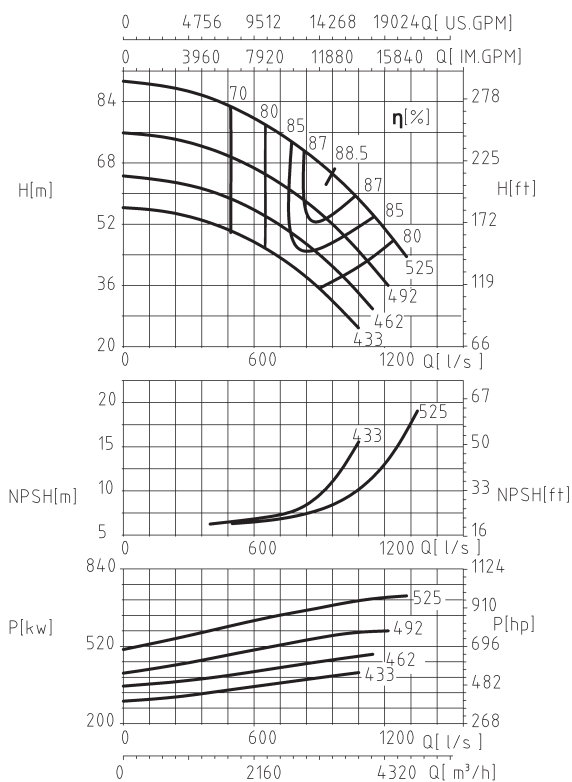


*CYS 400-525 985 r/min

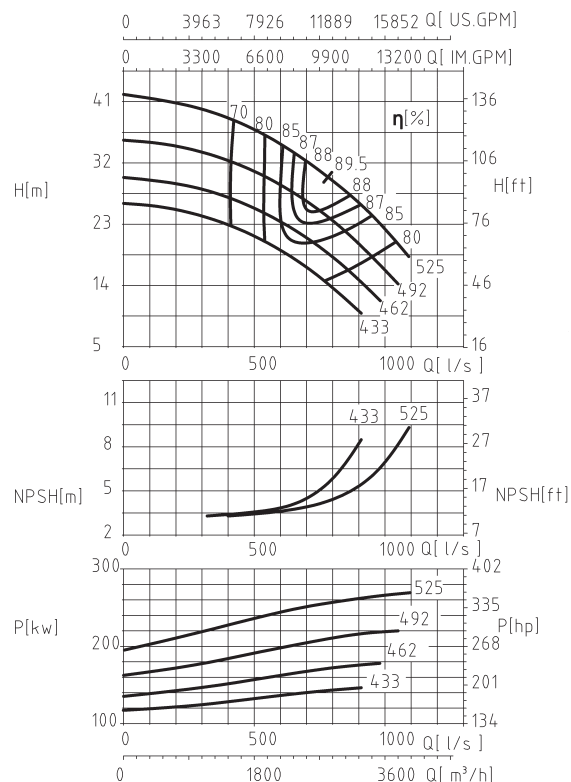


CYS 400-560 1450 r/min

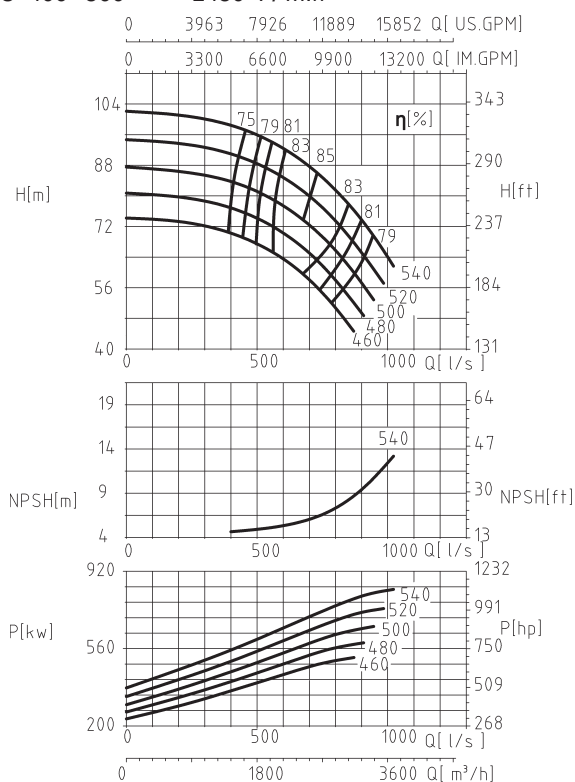


CYS 400-600 1450 r/min

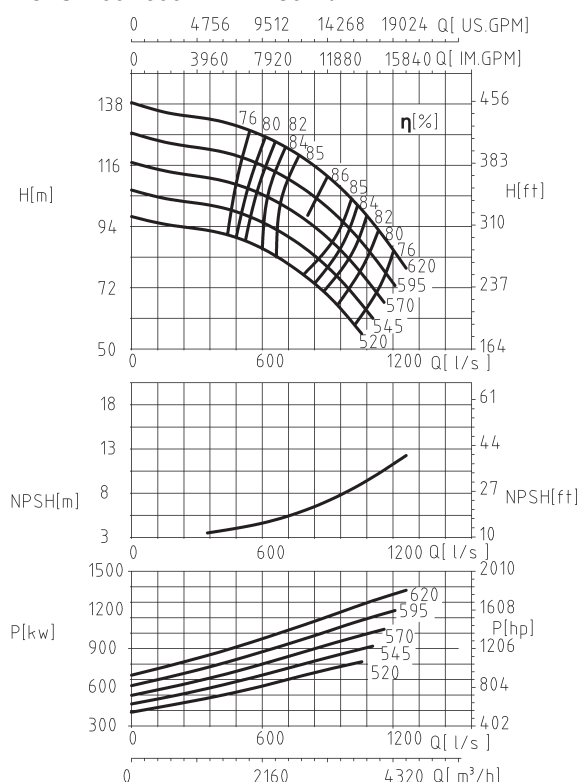


CYS 400-665 1480 r/min

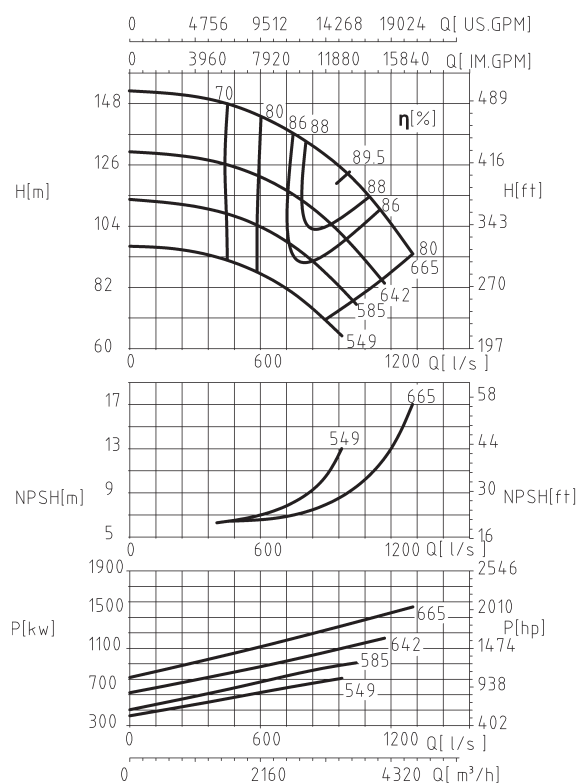


*CYS 400-665 985 r/min

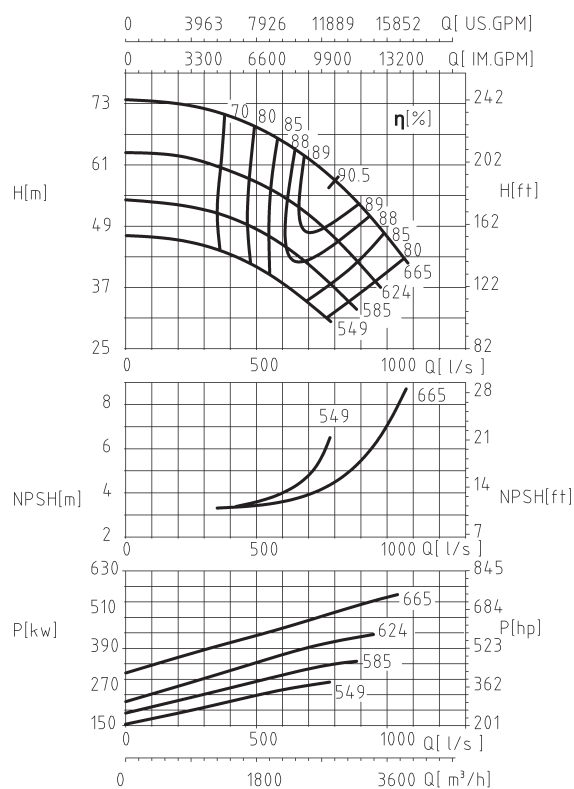


CYS 400-675 985 r/min

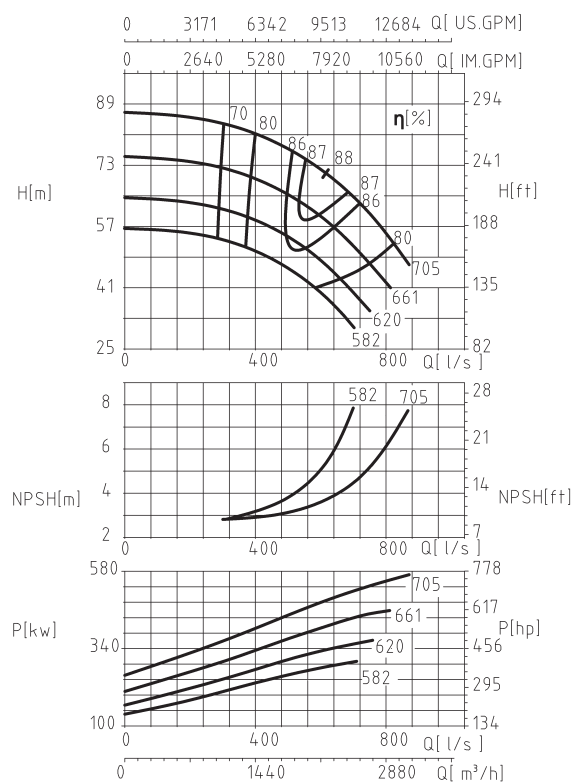


CYS 400-705 985 r/min

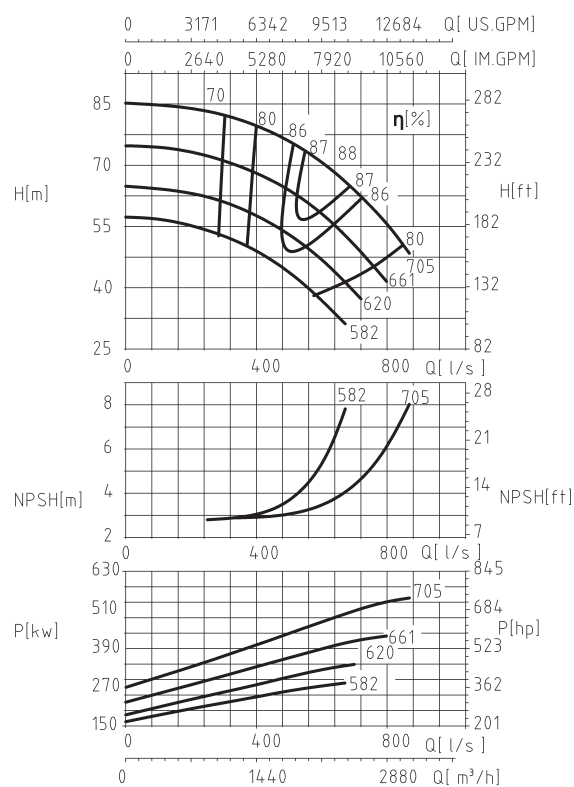


CYS 400-900 985 r/min

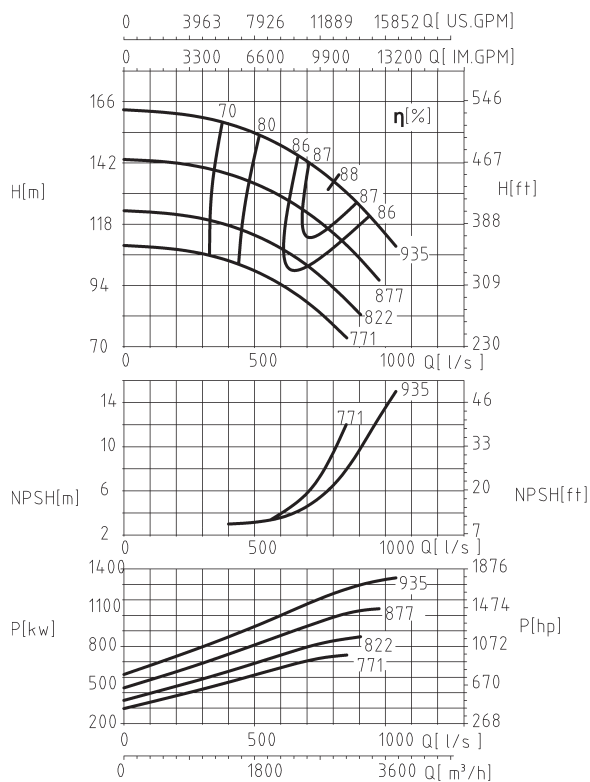


CYS 400-935 985 r/min

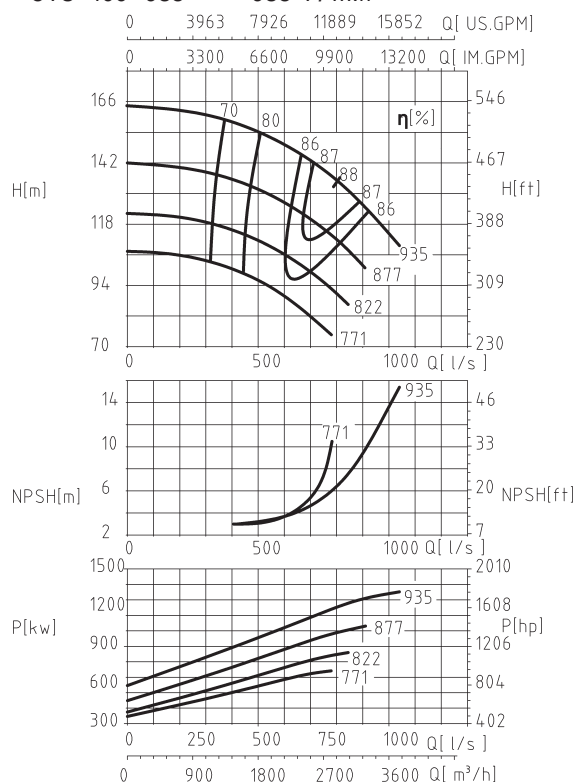


CYS 500-520 985 r/min

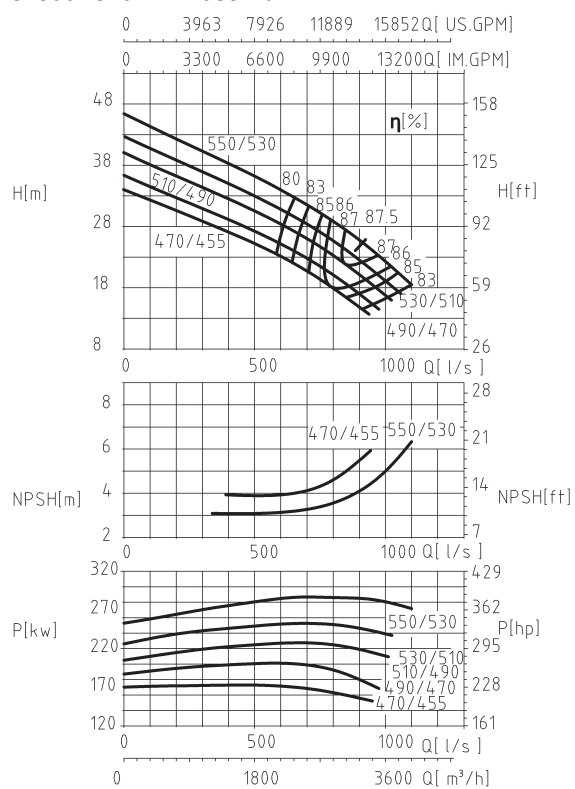


CYS 500-585 985 r/min

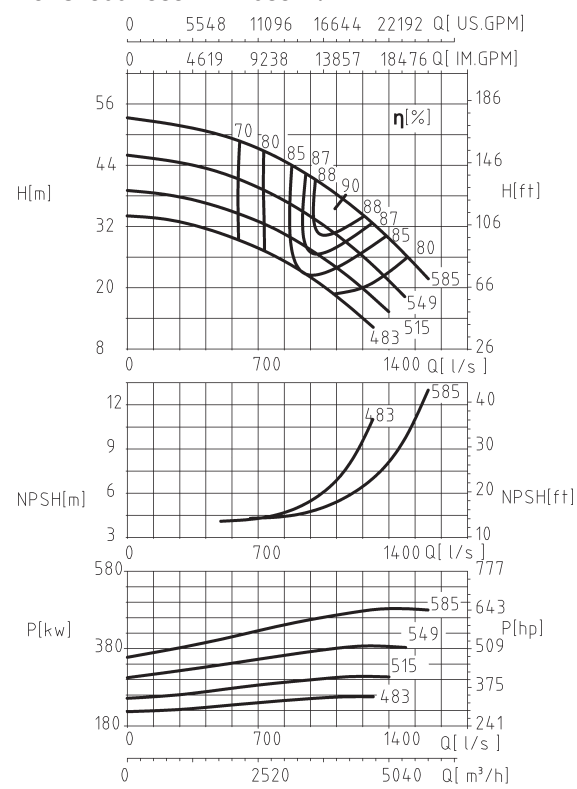


CYS 500-650 990 r/min

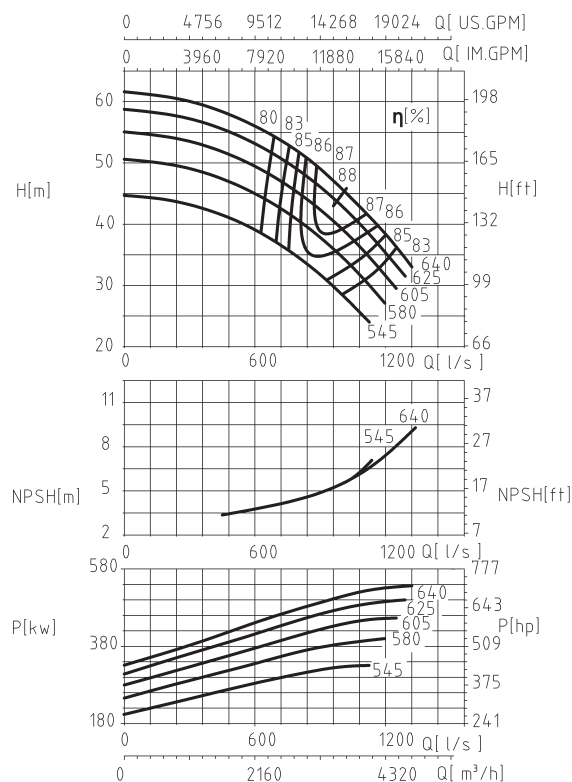


CYS 500-685 985 r/min

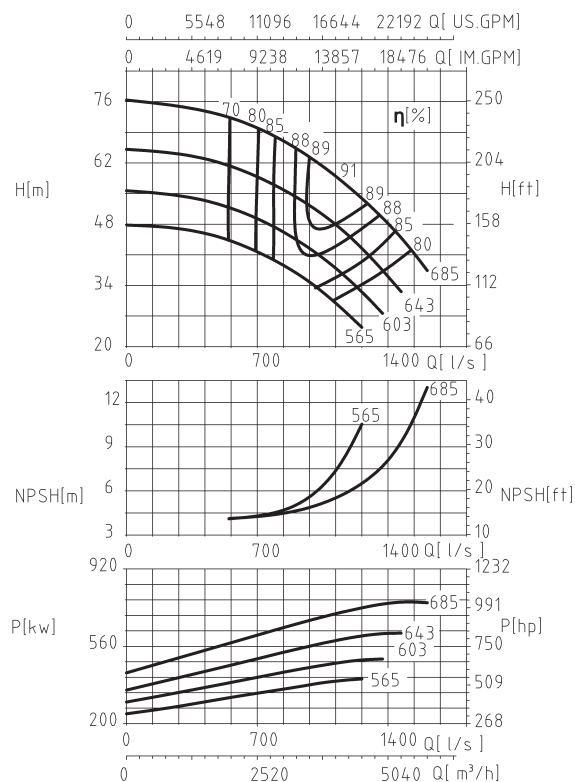


CYS 500-710 994 r/min

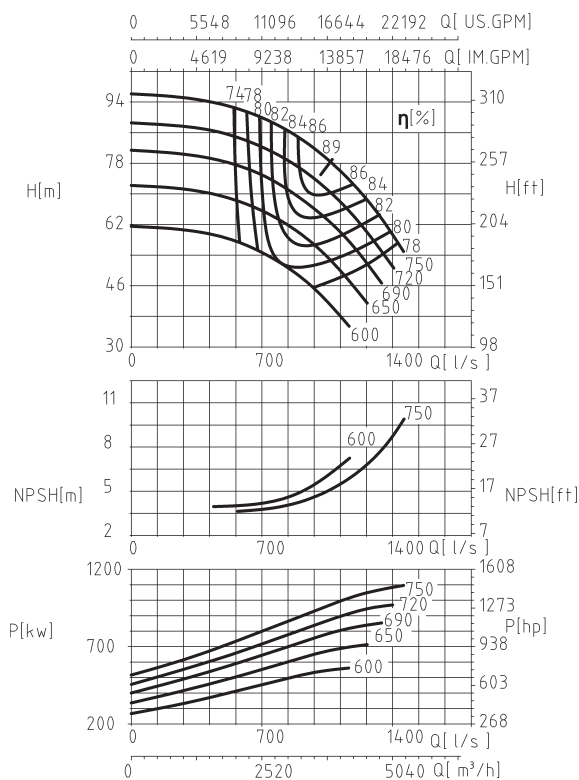


CYS 500-800 994 r/min

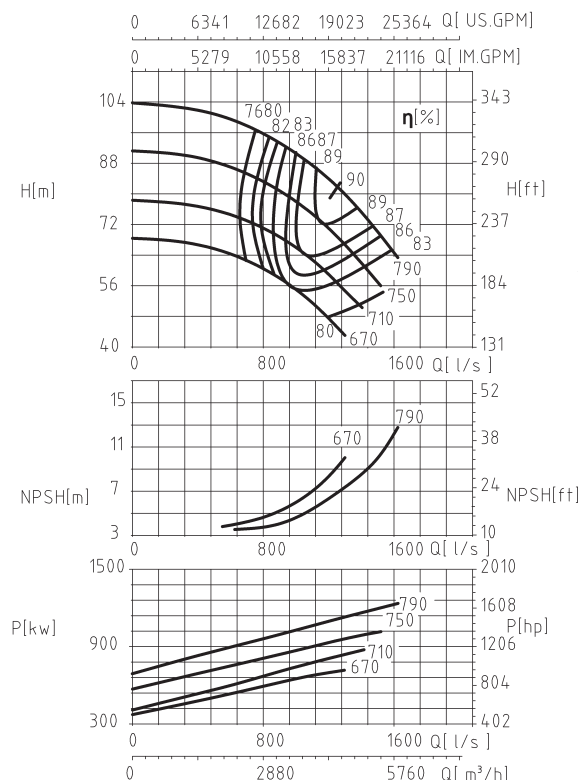


CYS 500-835 985 r/min

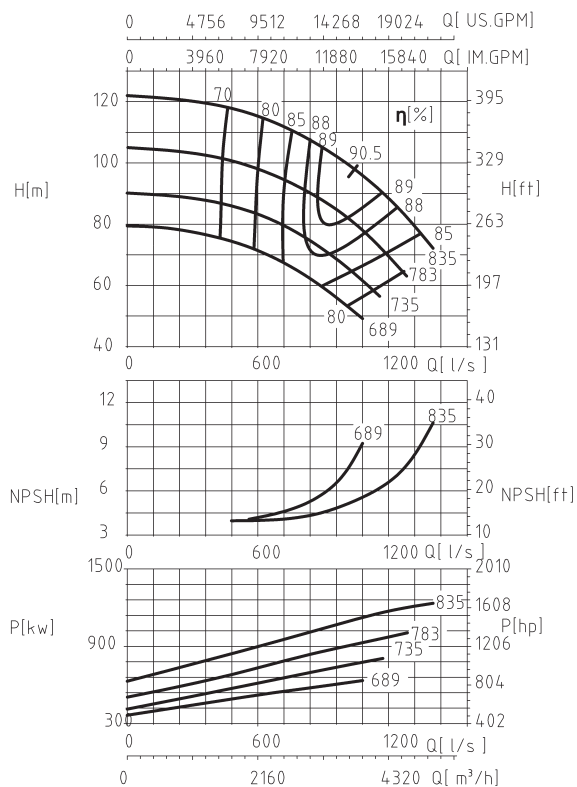


CYS 500-860 994 r/min

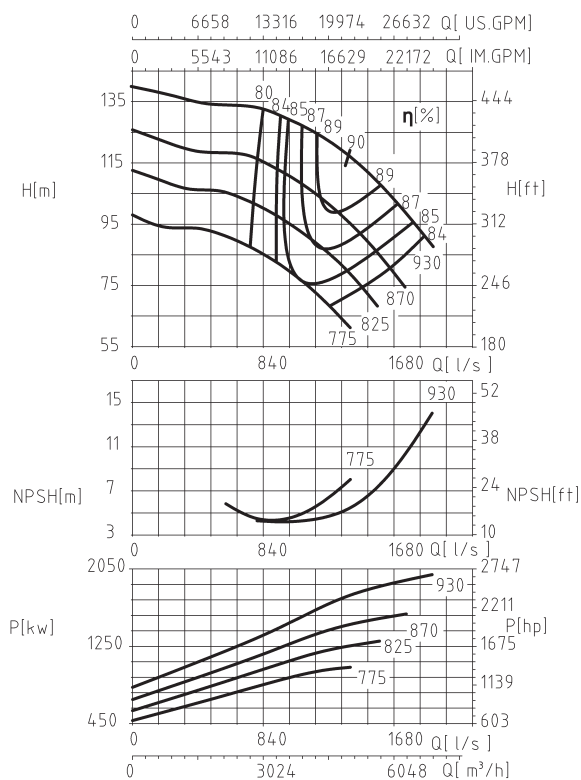


CYS 500-870 985 r/min

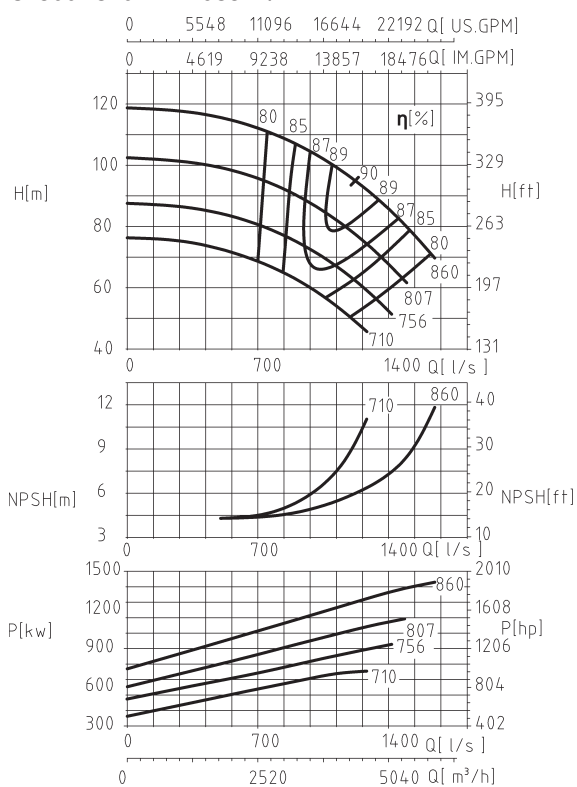


CYS 500-1015 985 r/min

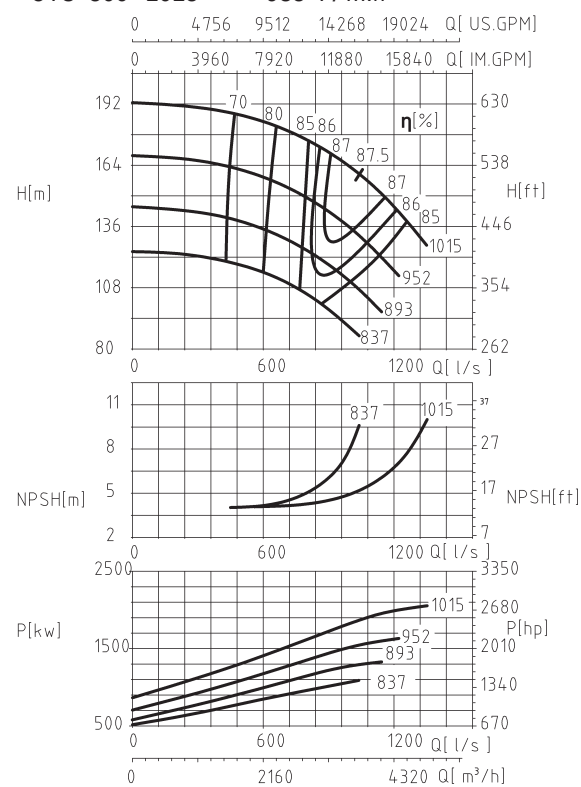


CYS 500-1050 985 r/min

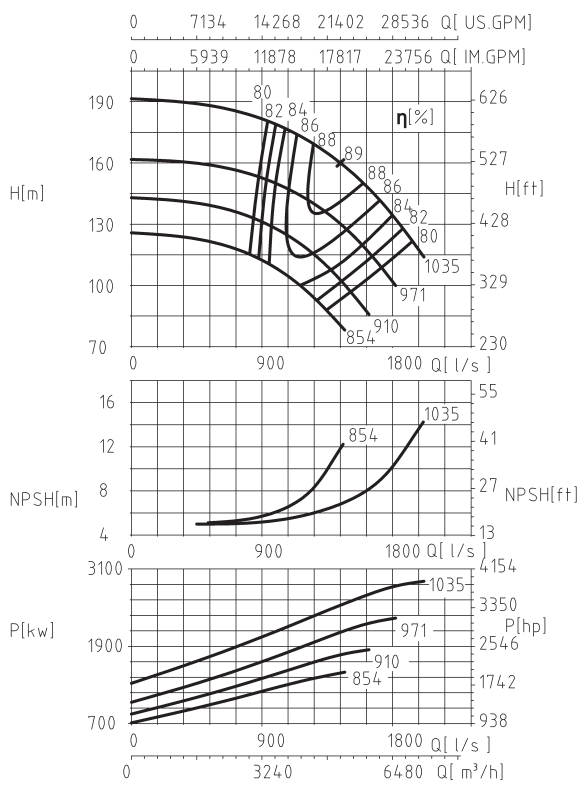


CYS 600-560 985 r/min

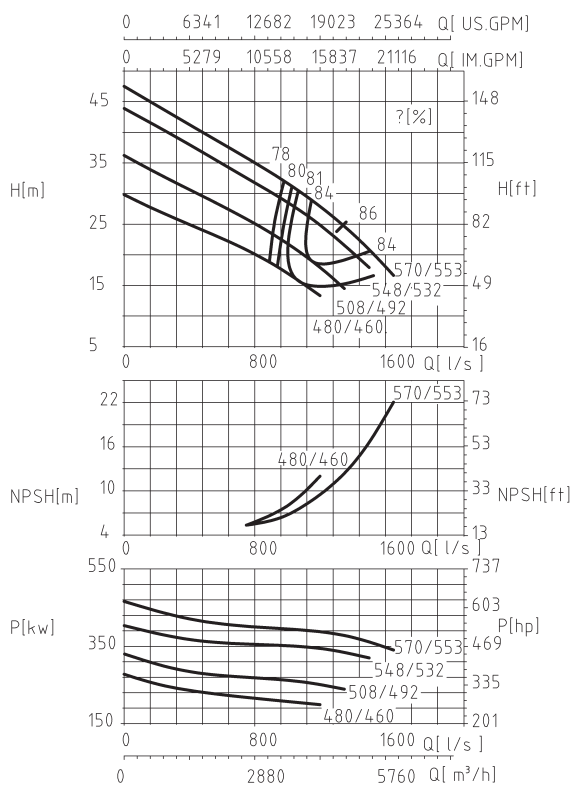


CYS 600-600 985 r/min

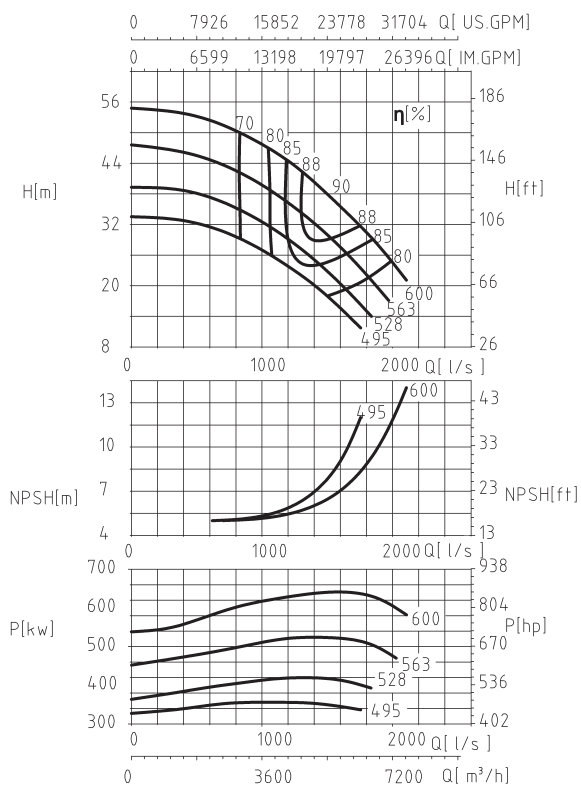


CYS 600-630 990 r/min

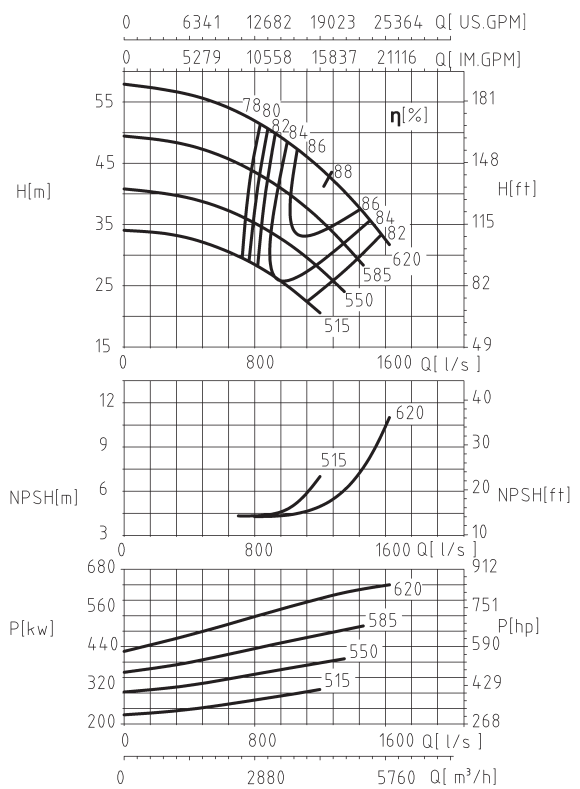


CYS 600-705 985 r/min

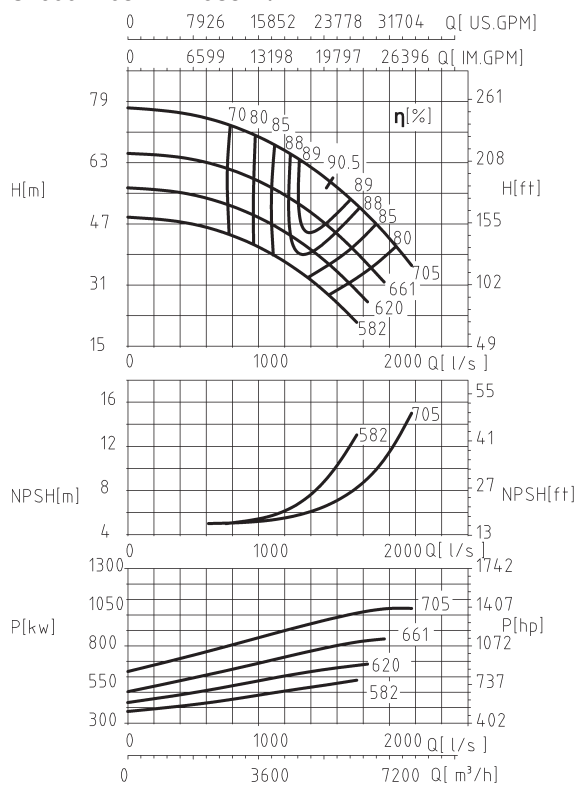


CYS 600-710 960 r/min




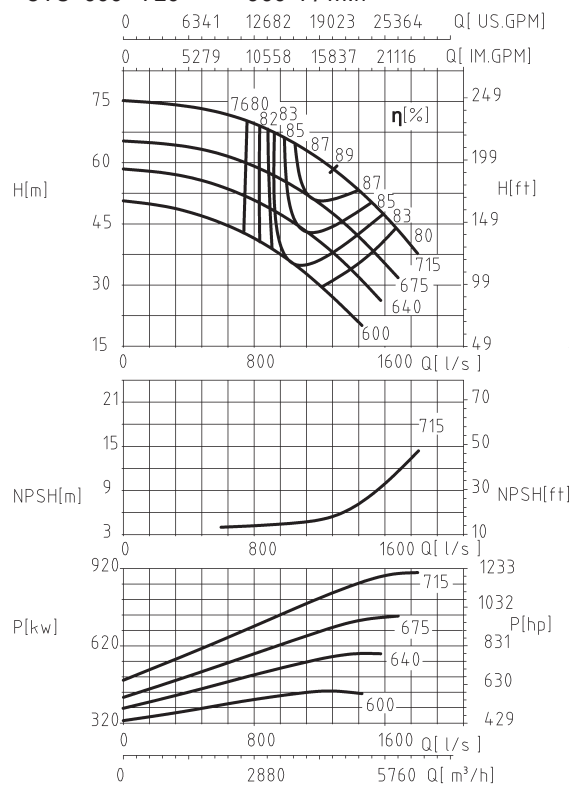


CYS 600-860 994 r/min

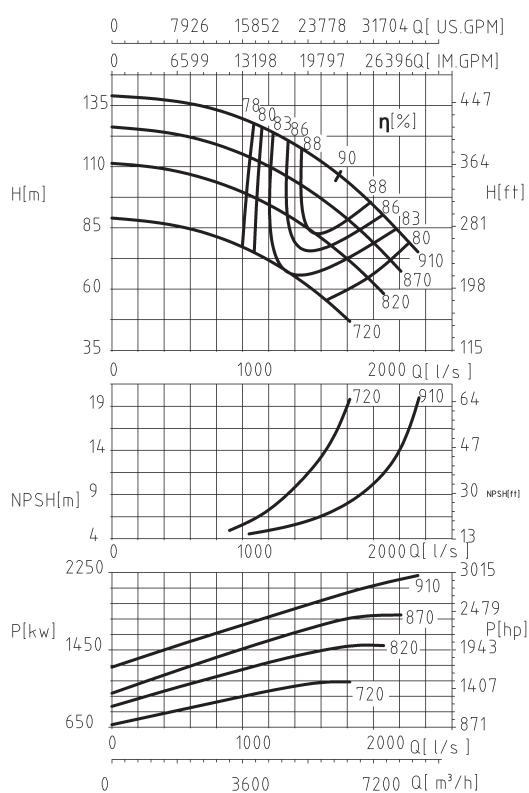


CYS 600-885 985 r/min

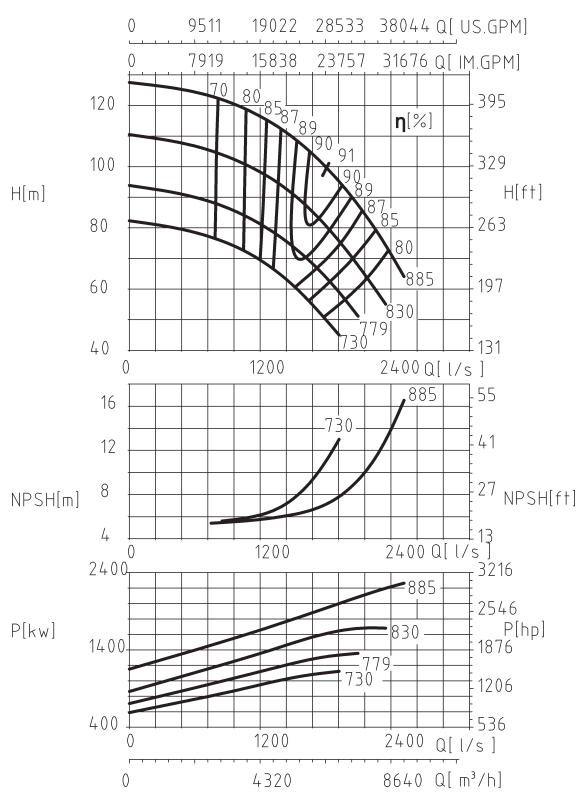


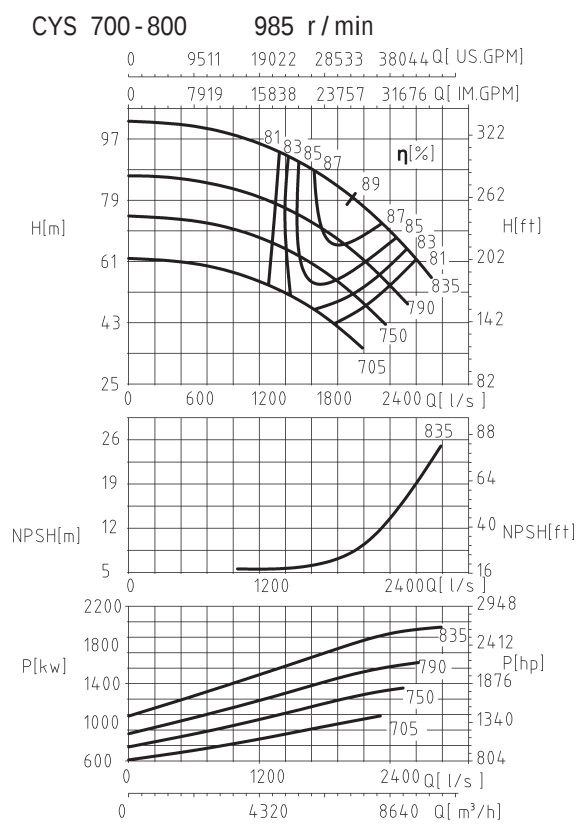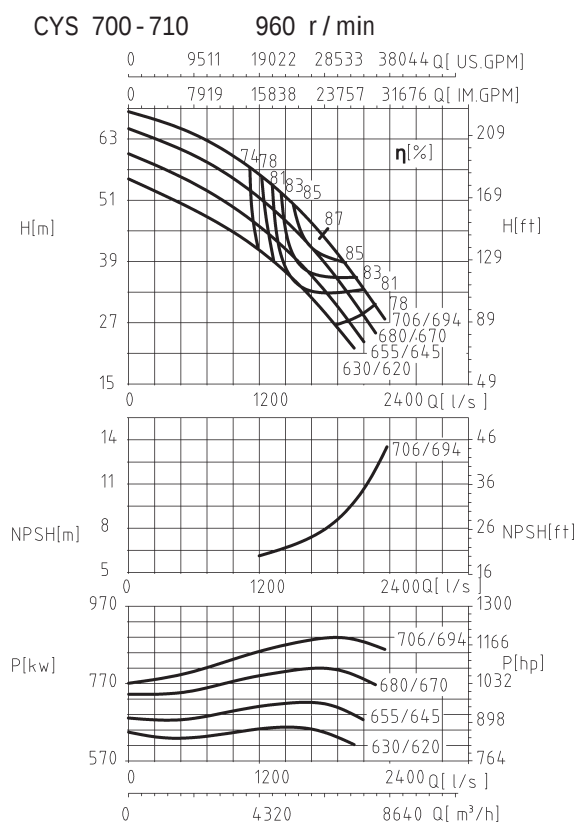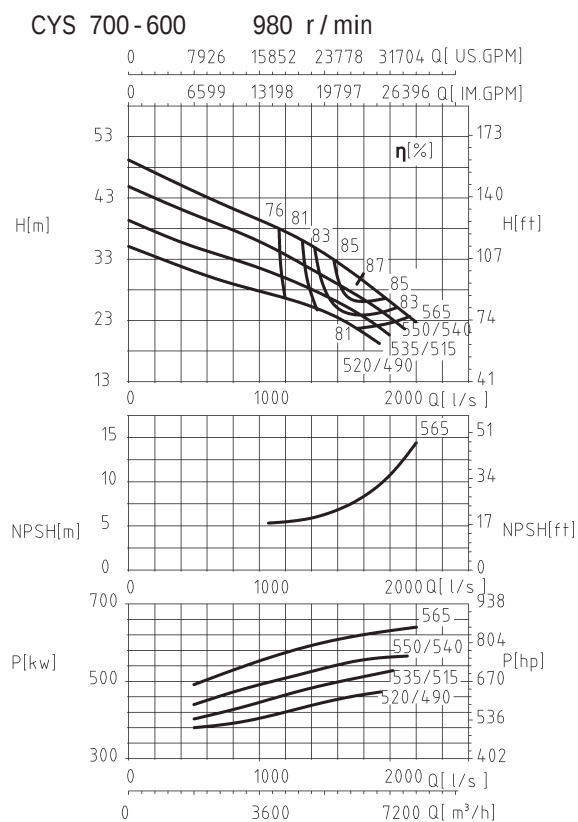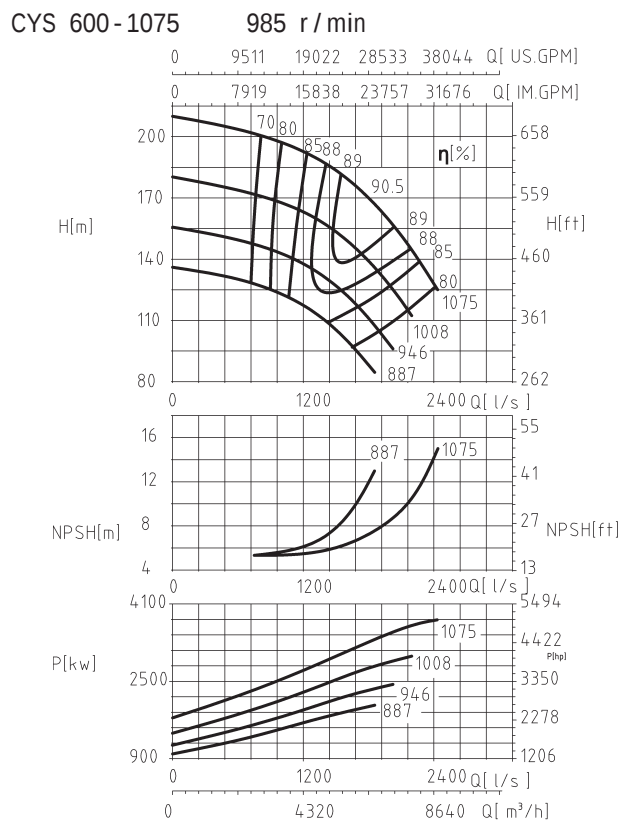


CYS 700-980 985 r/min

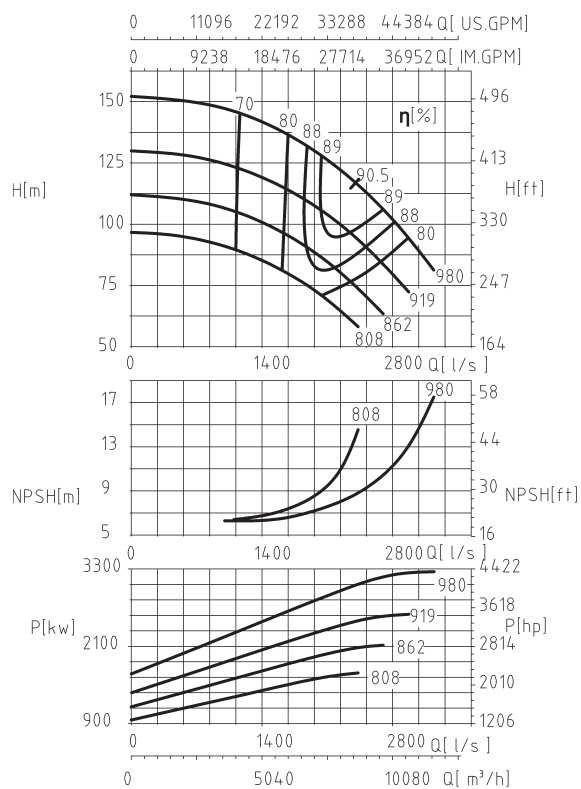


*CYS 700-980 740 r/min

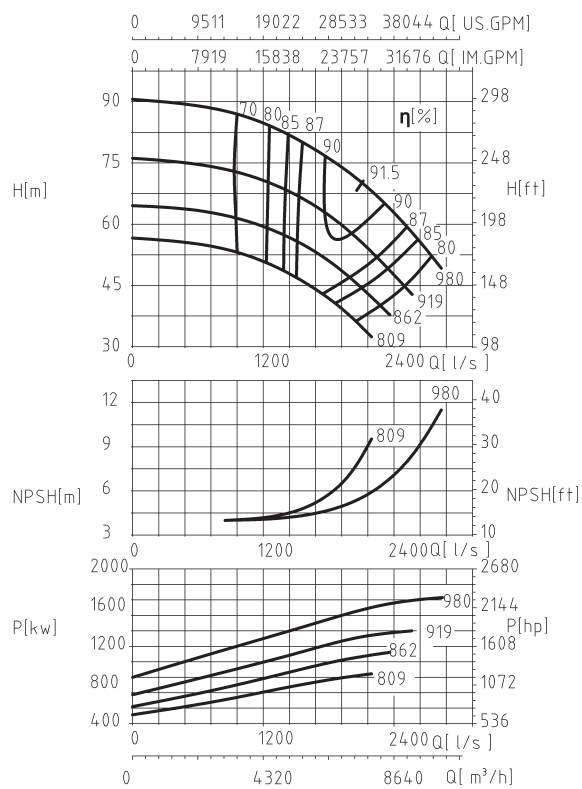


CYS 800-800 725 r/min

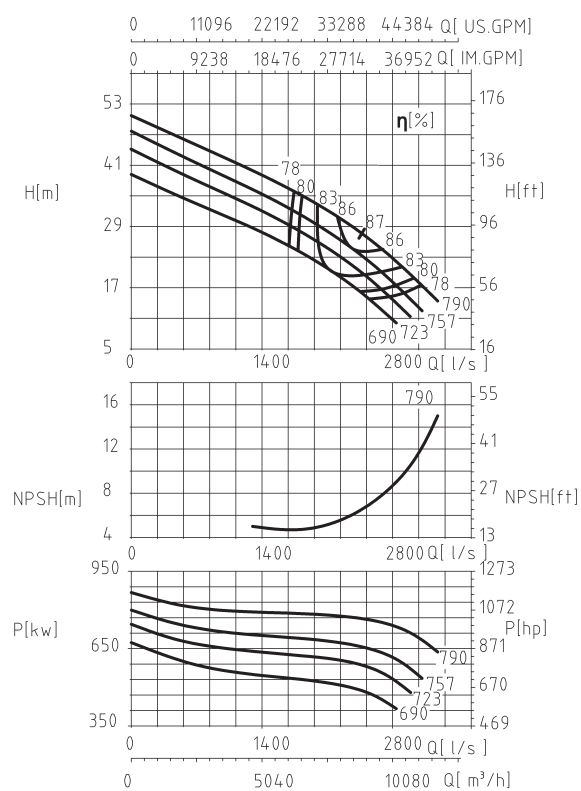


CYS 800-900 725 r/min

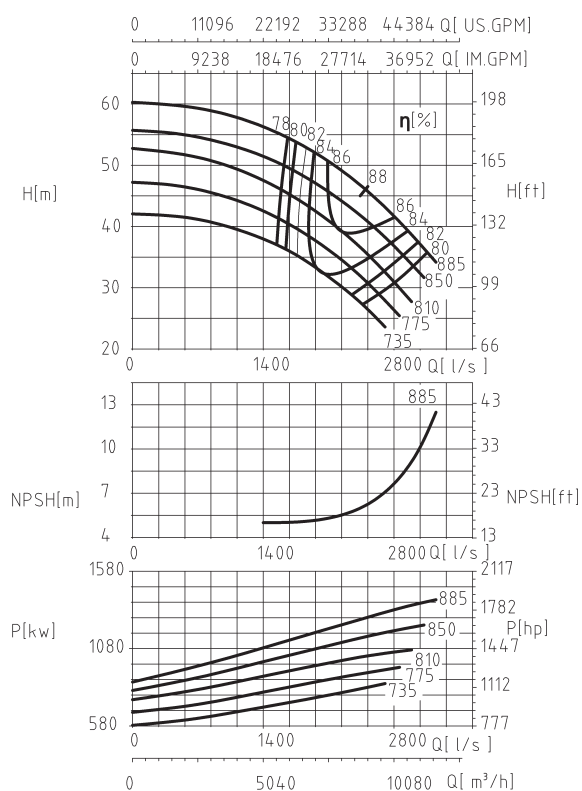


CYS 800-990 725 r/min

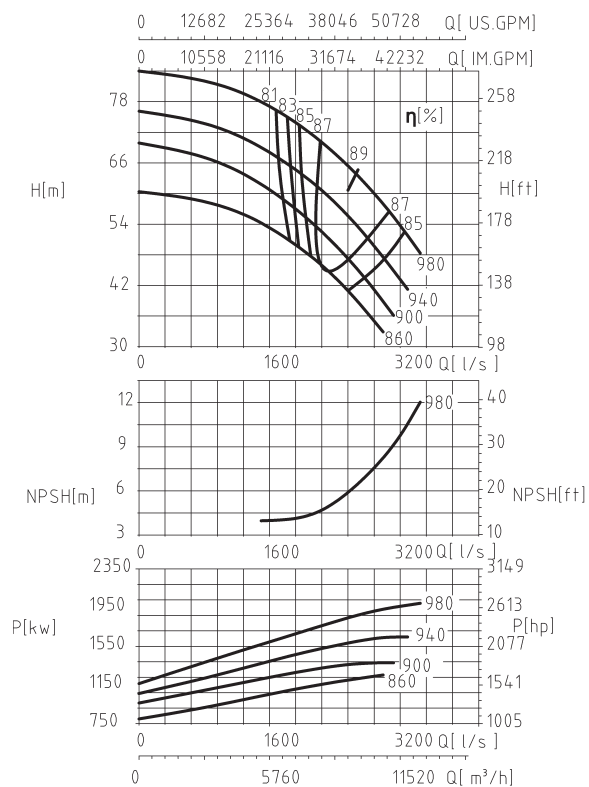


CYS 900-970 590 r/min

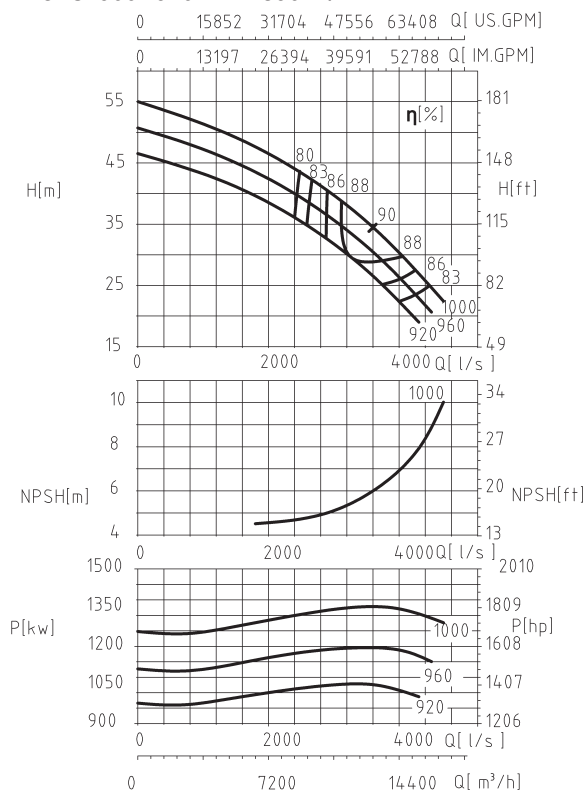


CYS 900-970J 490 r/min

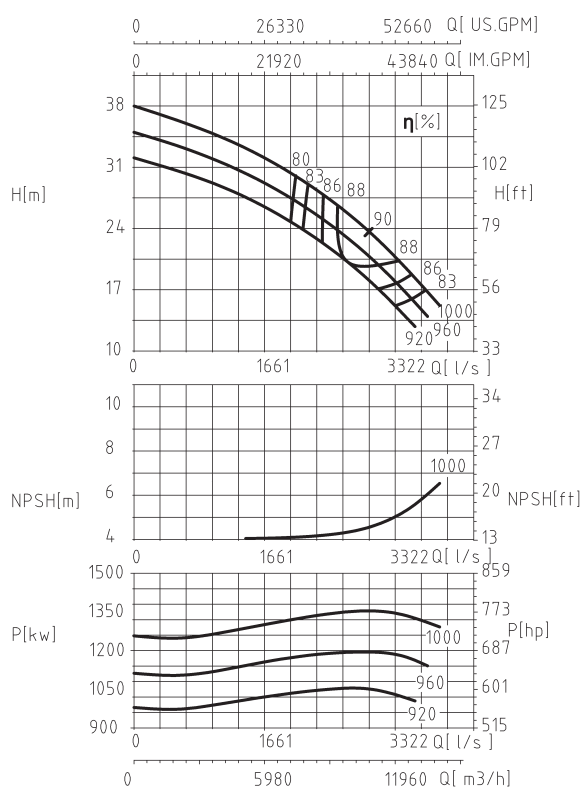


CYS 900-1030 590 r/min

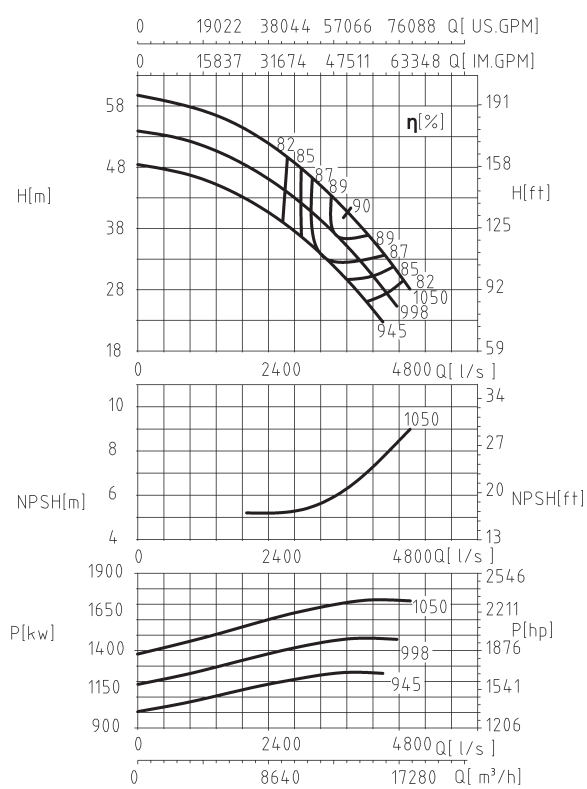


CYS 900-1030J 485 r/min

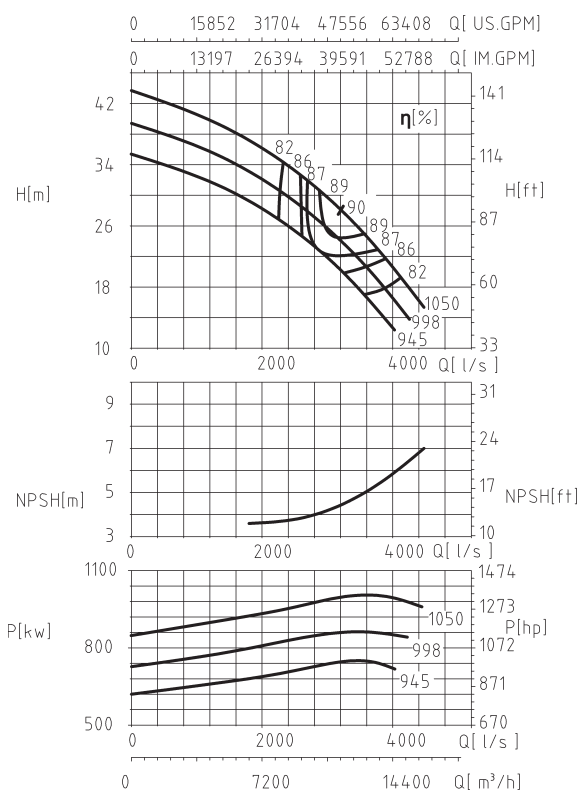


CYS 900-1050 590 r/min

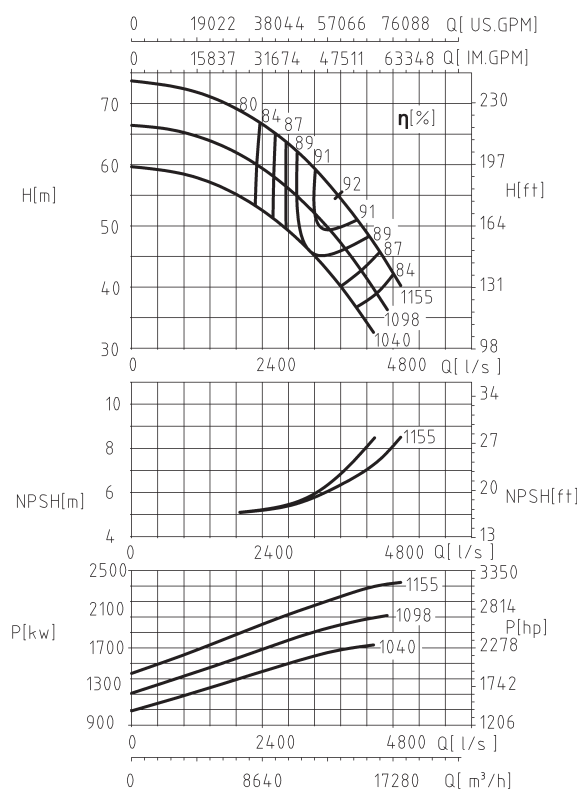


CYS 900-1050J 490 r/min

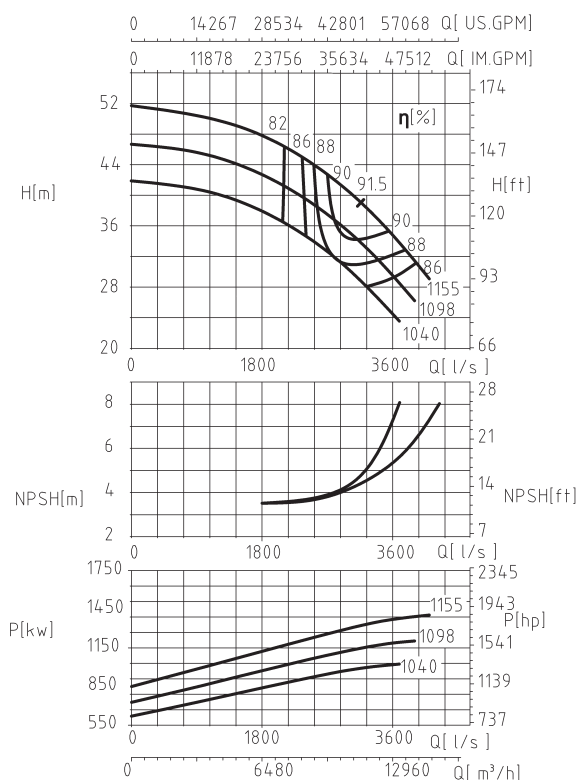


CYS 1000-1170 490 r/min

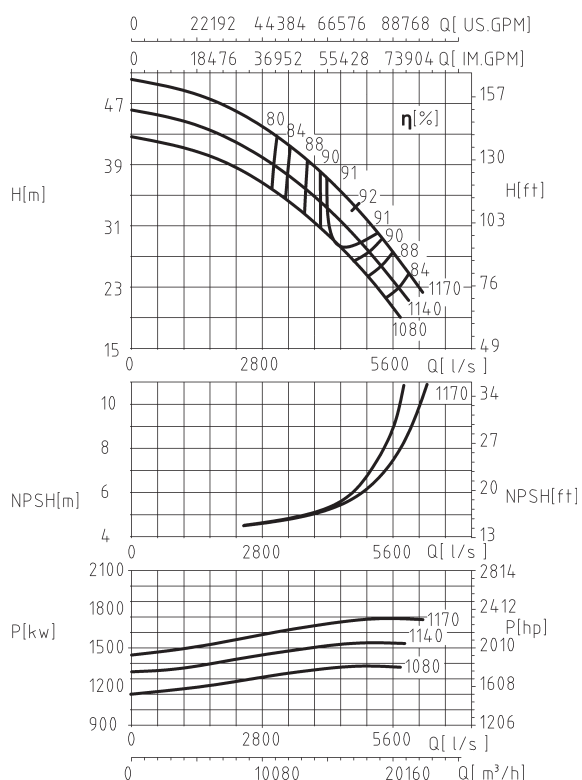

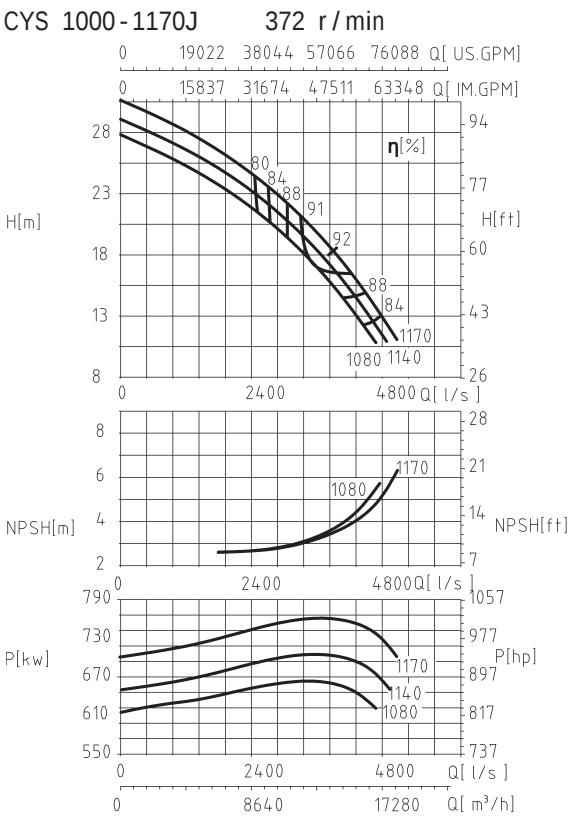


10. 连接法兰尺寸 (Connection Flange Dimension)

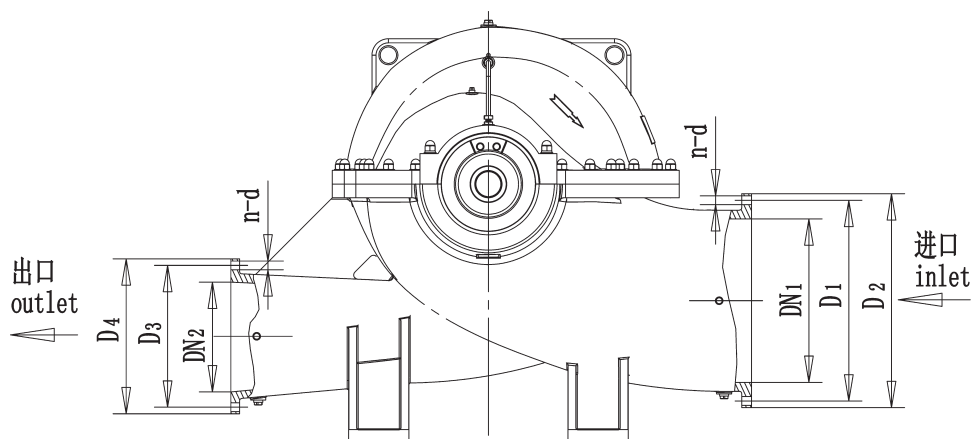

泵型号 Pump type	进口口径 Inlet dia	进口法兰尺寸 Inlet flange size			出口口径 Outlet dia	出口法兰尺寸 Outlet flange size		
	DN ₁	D ₁	D ₂	n-d	DN ₂	D ₃	D ₄	n-d
80-210	125	210	250	8-Φ19	80	160	200	8-Φ19
80-270	125	210	250	8-Φ19	80	160	200	8-Φ19
80-370	125	210	250	8-Φ19	80	160	200	8-Φ19
100-250	150	240	285	8-Φ23	100	180	220	8-Φ19
100-310	150	240	285	8-Φ23	100	180	220	8-Φ19
100-375	150	240	285	8-Φ23	100	180	220	8-Φ19
125-230	200	295	340	12-Φ23	125	210	250	8-Φ19
125-290	200	295	340	12-Φ23	125	210	250	8-Φ19
125-365	200	295	340	12-Φ23	125	210	250	8-Φ19
125-400	200	295	380	12-Φ23	125	220	270	8-Φ28
125-500	200	295	340	12-Φ23	125	210	250	8-Φ19
150-290	200	295	340	12-Φ23	150	240	285	8-Φ23
150-360	200	295	340	12-Φ23	150	240	285	8-Φ23
150-450	200	295	340	12-Φ23	150	240	285	8-Φ23
150-605	200	310	360	12-Φ28	150	250	300	8-Φ28
200-320	250	355	405	12-Φ28	200	295	340	12-Φ23
200-420	250	355	405	12-Φ28	200	295	340	12-Φ23
200-520	250	355	405	12-Φ28	200	295	340	12-Φ23
200-670	250	370	425	12-Φ31	200	310	360	12-Φ28
250-370	300	410	460	12-Φ28	250	355	405	12-Φ28
250-480	300	410	460	12-Φ28	250	355	405	12-Φ28
250-600	300	430	485	16-Φ31	250	370	425	12-Φ31
250-800	300	430	485	16-Φ31	250	385	450	12-Φ33
300-300	350	460	505	16-Φ23	300	400	445	12-Φ23
300-435	400	525	580	16-Φ31	300	410	460	12-Φ28
300-560	400	525	580	16-Φ31	300	410	460	12-Φ28
300-700	400	550	620	16-Φ37	300	430	485	12-Φ31
300-850	350	490	550	16-Φ34	300	450	510	16-Φ34
350-360	400	525	580	16-Φ31	350	470	520	16-Φ28
350-430	450	585	640	16-Φ31	350	470	520	16-Φ28

泵型号 Pump type	进口口径 Inlet dia	进口法兰尺寸 Inlet flange size			出口口径 Outlet dia	出口法兰尺寸 Outlet flange size		
	DN ₁	D ₁	D ₂	n-d	DN ₂	D ₃	D ₄	n-d
350-510	400	525	580	16-Φ31	350	470	520	16-Φ28
350-575	400	525	580	16-Φ31	350	470	520	16-Φ28
350-630	400	525	580	16-Φ31	350	470	520	16-Φ28
350-690	400	525	580	16-Φ31	350	470	520	16-Φ28
400-525	500	650	715	20-Φ33	400	525	580	16-Φ31
400-560	500	650	715	20-Φ33	400	525	580	16-Φ31
400-600	500	620	670	20-Φ28	400	550	620	16-Φ37
400-665	500	650	715	20-Φ33	400	525	580	16-Φ31
400-675	500	660	730	20-Φ36	400	550	620	16-Φ37
400-705	500	660	730	20-Φ36	400	550	620	16-Φ37
400-900	500	660	730	20-Φ36	400	550	620	16-Φ37
400-935	500	660	730	20-Φ36	400	550	620	16-Φ37
500-1015	600	770	840	20-Φ36	500	660	730	20-Φ36
500-1050	600	770	840	20-Φ36	500	660	730	20-Φ36
500-520	600	770	840	20-Φ36	500	650	715	20-Φ33
500-585	600	725	780	20-Φ31	500	620	670	20-Φ28
500-650	600	725	780	20-Φ31	500	620	670	20-Φ28
500-685	600	725	780	20-Φ31	500	620	670	20-Φ28
500-710	600	725	780	20-Φ31	500	620	670	20-Φ28
500-800	600	770	840	20-Φ36	500	650	715	20-Φ33
500-835	600	770	840	20-Φ36	500	650	715	20-Φ33
500-860	600	725	780	20-Φ31	500	650	715	20-Φ33
500-870	600	770	840	20-Φ36	500	650	715	20-Φ33
600-1075	700	875	960	24-Φ42	600	770	840	20-Φ36
600-560	700	840	910	24-Φ36	600	770	840	20-Φ36
600-600	700	840	910	24-Φ36	600	770	840	20-Φ36
600-630	700	840	910	24-Φ36	600	770	840	20-Φ36
600-705	700	840	910	24-Φ36	600	770	840	20-Φ36
600-710	700	840	910	24-Φ36	600	725	780	20-Φ31
600-860	700	840	910	24-Φ36	600	770	840	20-Φ36
600-885	700	840	910	24-Φ36	600	770	840	20-Φ36
700-600	800	950	1015	24-Φ34	700	840	910	24-Φ36
700-710	800	950	1015	24-Φ34	700	840	895	24-Φ31
700-800	800	950	1015	24-Φ41	700	840	910	24-Φ36
700-980	800	950	1015	24-Φ34	700	840	910	24-Φ36
800-800	900	1050	1125	28-Φ40	800	950	1025	24-Φ39
800-900	900	1050	1125	28-Φ40	800	950	1025	24-Φ39
800-990	900	1050	1125	28-Φ40	800	950	1025	24-Φ39
900-1030	1000	1160	1230	28-Φ34	900	1050	1115	28-Φ34
900-1050	1000	1160	1230	28-Φ34	900	1050	1115	28-Φ34
900-970	1000	1160	1230	28-Φ34	900	1050	1115	28-Φ34
1000-1170	1200	1390	1485	32-Φ48	1000	1170	1255	28-Φ42

11. 主要外形尺寸(Main Outline dimension)

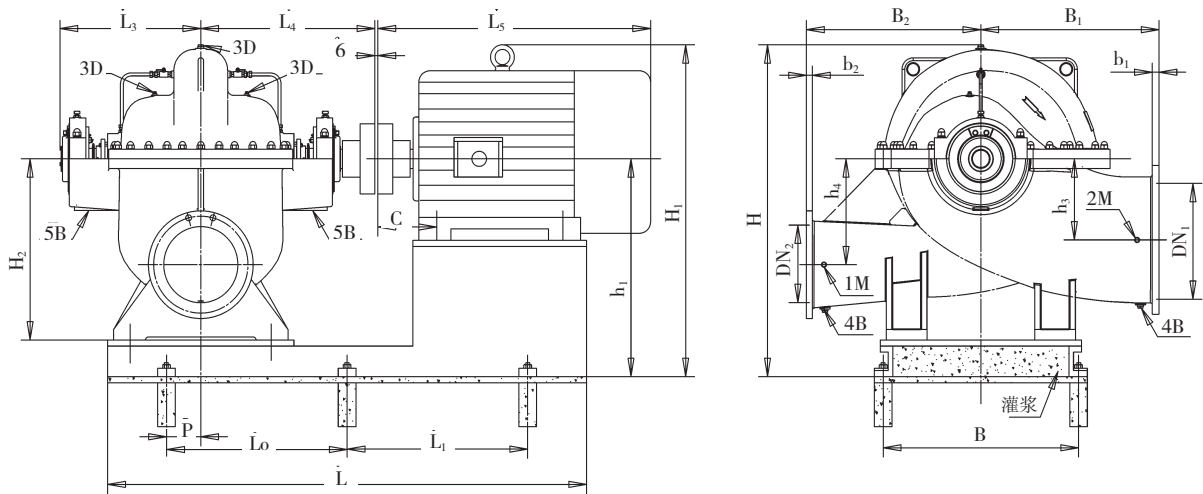

连接螺纹尺寸 Connect nut size

1M	压力表 Pressure meter	R1/2	4B	排水孔 Scupper	R1/2
2M	真空表 Vacuum meter	R1/2	5B	漏液排出孔 Leakage vent	R1/2
3D	排气孔 Vent	R1/2			

主要外形尺寸(配 Y 型电机)

Outline Dimension(Y serial motor)

单位:mm

Unit:mm

泵型号		法兰尺寸 Flange size				泵尺寸 Pump size								泵重量(kg)
Pump type		DN ₁	DN ₂	b ₁	b ₂	B ₁	B ₂	L ₄	H≤	L ₃	H ₂	h ₃	h ₄	Weight
80-210		125	80	35	29	300	300	445	600	336	315	140	140	310
80-270		125	80	35	29	300	300	445	600	336	315	140	140	320
80-370		125	80	35	29	330	330	445	600	336	315	140	140	340
100-250		150	100	37	32	330	330	445	760	336	355	170	170	350
电机极数	泵型号	电机型号	电机功率	B	h ₁	H ₁	L	L ₀	L ₁	C	P	L ₅	电机重量	底座参考重量
Motor pole	Pump type	Motor type	Motor power (kw)										Motor Weight (kg)	Base Weight (kg)
4	80-210	100L	3	340	435	605	880	340	340	123	70	380	38	70
		112M	4	340	435	623	890	345	345	130	70	400	43	70
		132S	5.5	340	435	648	970	365	365	169	70	475	68	80
	80-270	132S	5.5	340	435	618	970	365	365	169	70	475	68	80
		132M	7.5	340	435	618	1010	385	385	169	70	515	81	80
		160M	11	340	435	695	1050	425	425	218	70	605	123	80
	80-370	160M	11	340	435	660	1090	425	425	218	70	605	123	80
		160L	15	340	435	660	1100	450	450	218	70	650	144	80
		180L	22	340	435	710	1150	475	475	231	70	710	195	110
	100-250	132M	7.5	406	500	688	1010	385	385	169	70	475	81	80
		160M	11	406	500	735	1090	430	430	218	70	605	123	100
2	80-210	180M	22	340	435	710	1150	455	455	231	70	710	180	80
		200L1	30	340	435	740	1220	495	495	243	70	775	240	90
		200L2	37	340	435	740	1220	495	495	243	70	775	240	90
	80-270	200L2	37	340	435	740	1220	515	515	243	70	775	240	95
		250M	55	457	460	800	1340	560	560	308	70	930	395	95
		280S	75	457	460	835	1410	595	595	330	70	1000	500	98
	80-370	280S	75	457	450	810	1240	500	500	330	70	1000	500	95
		315S	110	508	450	1000	1325	550	550	356	70	1240	875	98
		315M	132	508	450	1000	1380	580	580	356	70	1310	950	100
		315L	160	508	450	1000	1430	600	600	356	70	1310	1070	105
	100-250	225M	45	406	500	805	1245	505	505	259	70	815	325	140
		250M	55	406	500	840	1320	560	560	308	70	930	395	140
		280S	75	457	500	875	1410	595	595	330	70	1000	500	140
		280M	90	457	500	875	1460	620	620	330	70	1050	550	102

主要外形尺寸(配 Y 型电机)
单位:mm

Outline Dimension(Y serial motor)
Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size								泵重量(kg)	
		DN ₁	DN ₂	b ₁	b ₂	B ₁	B ₂	L ₄	H≤	L ₃	H ₂	h ₃	h ₄	Weight	
100-310		150	100	37	32	330	330	445	760	336	355	170	170	370	
100-375		150	100	37	32	370	370	445	760	336	355	170	170	400	
125-230		200	125	41	35	370	370	517.5	830	336	400	200	200	450	
125-290		200	125	41	35	370	370	517.5	830	336	400	200	200	450	
125-365		200	125	41	35	370	370	517.5	880	336	400	200	200	450	
125-400		200	125	41	35	450	450	536	1005	395	400	200	200	500	
125-500		200	125	41	35	450	450	517.5	905	366	400	200	200	450	
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type	电机功率 Motor power (kw)		B	h ₁	H ₁	L	L ₀	L ₁	C	P	L ₅	电机重量 Motor Weight (kg)	底座参考重量 Base Weight (kg)
4	100-310	160M	11		406	500	735	1090	430	430	218	70	605	123	100
		160L	15		406	500	735	1140	450	450	218	70	650	144	100
		180M	18.5		406	500	740	1140	450	450	231	70	670	180	110
		180L	22		406	500	740	1180	470	470	231	70	710	195	110
	100-375	180M	18.5		406	500	740	1140	450	450	231	70	670	180	110
		200L	30		406	500	740	1190	495	495	243	70	775	260	140
		225M	45		406	500	805	1270	520	520	243	70	845	335	140
2	100-310	280M	90		457	500	875	1460	620	620	330	70	1050	550	102
		315S	110		508	500	1030	1480	640	640	356	70	1240	875	150
		315L	160		508	500	1030	1605	680	680	356	70	1310	1070	150
		315L2	200		508	500	1030	1605	680	680	356	70	1310	1190	150
	100-375	355M	250		610	500	1180	1720	750	750	394	70	1540	1400	155
		315M	132		508	500	1050	1605	680	700	356	70	1310	950	150
		160M	11		450	520	780	1200	495	495	218	70	605	123	80
4	125-230	160L	15		450	520	780	1240	520	520	218	70	650	144	80
		180M	18.5		450	520	795	1250	540	540	231	70	670	180	110
		160L	15		450	520	780	1240	520	520	218	70	650	144	80
	125-290	180M	18.5		450	520	795	1250	540	540	231	70	670	180	110
		180L	22		450	520	795	1300	540	540	231	70	710	195	110
		200L	30		450	520	825	1340	560	560	243	70	775	260	190
		200L	30		450	520	825	1330	560	560	243	70	775	260	190
	125-365	225S	37		450	520	855	1360	575	575	289	70	820	305	190
		225M	45		450	520	855	1385	575	575	289	70	845	335	190
		280S	75		457	545	945	1520	660	660	330	70	1000	520	250
		225M	45		457	545	855	1380	590	590	289	70	845	335	190
	125-500	280S	75		457	545	920	1500	655	655	330	70	1000	520	250
		280M	90		457	545	920	1575	680	680	330	70	1050	550	250
		315S	110		457	545	1050	1630	715	715	386	70	1270	875	410
		280S	75		487	545	945	1520	660	660	330	105	1000	500	140
2	125-230	280M	90		487	545	945	1580	690	690	330	105	1050	550	140
		315S	110		560	545	1075	1610	710	710	356	105	1240	875	190
		280M	90		457	545	945	1570	690	690	330	105	1050	550	190
	125-290	315M	132		457	545	1075	1670	735	735	356	105	1310	950	190
		315L1	160		457	520	1050	1700	750	750	356	105	1310	1070	190
		355M1	220		640	545	1200	1840	800	800	394	105	1540	1350	250
		4001	450		710	605	1405	2500	1100	1100	545	70	2090	2480	520
	125-365	355S	355		630	605	1320	2350	1050	1050	485	70	1870	1890	510
		355L1	280		508	565	1245	1830	800	800	394	70	1310	1550	260
		315L1	160		508	545	1095	1670	700	700	356	70	1540	1070	245
	125-400	4002	500		710	600	1400	2550	1150	1150	485	95	2090	2300	520
		3556	400		660	600	1315	2440	1100	1100	545	95	1870	1950	500
355S		355		660	600	1315	2440	1100	1100	545	95	1870	1850	500	
355L2	315		610	540	1070	2010	900	900	356	95	1540	1650	240		

CYS型单级双吸中开离心泵

主要外形尺寸(配 Y 型电机)

Outline Dimension(Y serial motor)

单位:mm

Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size								泵重量(kg) Weight	
		DN ₁	DN ₂	b ₁	b ₂	B ₁	B ₂	L ₄	H≤	L ₃	H ₂	h ₃	h ₄		
150-290		200	150	41	36.5	400	400	517.5	845	366	400	200	200	580	
150-360		200	150	41	36.5	400	400	517.5	875	366	400	200	200	620	
150-450		200	150	41	36.5	450	450	594	900	421	400	200	200	750	
150-605		200	150	41	36.5	600	500	594	1110	421	500	300	300	1100	
200-320		250	200	48	41	450	450	594	1110	421	500	240	240	740	
200-420		250	200	48	41	500	500	594	1110	421	500	240	240	850	
200-520		250	200	48	41	600	500	657	1110	464	560	300	300	1380	
200-670		250	200	48	41	650	550	657	1110	464	600	350	350	1630	
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type	电机功率 Motor power (kw)		B	h ₁	H ₁	L	L ₀	L ₁	C	P	L ₅	电机重量 Motor Weight (kg)	底座参考重量 Base Weight (kg)
4	150-290	180M	18.5		450	520	795	1250	540	540	231	110	670	180	110
		180L	22		450	520	795	1290	540	540	231	110	710	195	110
		200L	30		450	520	825	1320	560	560	243	110	775	260	190
		225S	37		450	520	855	1360	575	575	289	110	820	305	190
	150-360	200L	30		450	545	850	1330	560	560	243	105	775	260	190
		225S	37		450	520	855	1360	575	575	289	105	820	305	190
		250M	55		450	520	885	1450	620	620	308	105	930	420	250
		280S	75		457	545	945	1520	660	660	330	105	1000	520	250
	150-450	250M	55		560	520	885	1570	680	680	308	150	930	420	250
		280S	75		560	520	920	1640	715	715	330	150	1000	520	250
		315S	110		560	520	1050	1760	775	775	386	150	1270	875	410
		315M	132		560	520	1050	1810	800	800	386	150	1310	1025	410
	150-605	315M	132		720	680	1210	1810	800	800	386	150	1310	1025	410
		315L1	160		700	620	1150	1860	815	815	386	150	1340	1135	410
		315L2	200		700	620	1150	1860	815	815	386	150	1340	1255	410
		355M2	250		702	640	1335	1980	870	870	424	150	1570	1450	440
	200-320	225S	37		560	620	955	1480	635	635	289	150	820	305	190
		225M	45		560	620	955	1500	650	650	289	150	845	335	190
		250M	55		560	620	985	1570	680	680	308	150	930	420	250
		280S	75		560	620	1020	1640	715	715	330	150	1000	520	250
	200-420	280S	75		560	620	1020	1640	715	715	330	150	1000	520	250
		280M	90		560	620	1020	1690	740	740	330	150	1050	610	250
		315S	110		560	645	1175	1760	775	775	386	150	1270	875	410
		315M	132		560	620	1150	1810	800	800	386	150	1340	1025	410
	200-520	315S	110		700	740	1270	1820	805	805	386	150	1270	875	410
		315M	132		700	740	1270	1870	830	830	386	150	1340	1025	410
		315L	160		700	740	1270	1910	845	845	386	150	1340	1135	410
		3552	250		700	740	1455	2640	750	750	525	150	1800	1870	440
	200-670	3553	280		700	740	1455	2640	750	750	525	150	1800	2040	480
		355M	220		700	800	1455	2040	915	915	424	150	1570	1350	410
		3552	250		700	800	1205	2450	750	750	525	150	1800	1760	410
		3553	280		700	800	1205	2450	750	750	525	150	1800	1760	410
		3554	315		700	800	1205	2450	750	750	525	150	1800	1820	410
		3556	400		700	800	1205	2450	750	750	525	150	1800	1960	440
		4001	450		710	800	1205	2750	790	790	545	150	1800	2480	440

主要外形尺寸(配Y型电机)


Outline Dimension(Y serial motor)

单位:mm

Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size								泵重量(kg)	
		DN ₁	DN ₂	b ₁	b ₂	B ₁	B ₂	L ₄	H≤	L ₃	H ₂	h ₃	h ₄	Weight	
250-370		300	250	51	48	500	500	657	1180	464	600	300	300	1090	
250-480		300	250	51	48	550	550	731	1200	516	600	300	300	1360	
250-600		300	250	51	48	650	550	731	1355	516	630	350	350	2000	
250-800		300	250	51	48	800	700	810	1510	810	710	400	400	2100	
300-300		350	300	54	51	550	500	657	1250	464	630	300	300	1030	
300-435		400	300	57	51	650	550	731	1320	516	670	350	350	1490	
300-560		400	300	57	51	700	650	810	1394	595	710	350	350	2350	
300-700		400	300	57	51	750	650	810	1580	595	750	400	400	2780	
300-850		350	300	44	46	960	840	1050	1830	823	850	480	480	3800	
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type	电机功率 Motor power (kw)		B	h ₁	H ₁	L	L ₀	L ₁	C	P	L ₅	电机重量 Motor Weight (kg)	底座参考重量 Base Weight (kg)
4	250-370	280S	75		700	780	1180	1700	745	745	330	150	1000	520	250
		315S	110		700	780	1310	1820	805	805	386	150	1270	875	410
		315M	132		700	780	1310	1860	830	830	386	150	1340	1025	410
		315L	160		700	780	1310	1920	845	845	386	150	1340	1135	410
	250-480	315L	160		700	800	1330	2060	915	915	386	210	1340	1135	410
		315L	200		700	780	1310	2060	915	915	386	210	1340	1255	410
		355(6KV)	220		700	800	1515	2780	840	840	525	210	1800	1610	410
		355(6KV)	280		700	800	1225	2570	790	790	525	210	1800	1740	410
	250-600	355(6KV)	250		700	830	1545	2780	840	840	525	210	1800	1670	440
		355(6KV)	355		700	830	1225	2570	790	790	525	210	1800	1810	440
		400(6KV)	450		850	830	1630	2860	880	880	545	210	1900	2280	480
		400(6KV)	560		710	860	1295	2720	840	840	545	230	1900	2570	480
	250-800	5002	1120		1000	910	1930	3450	1600	1600	725	210	2150	4830	700
		4504	900		1000	910	1810	3135	1450	1450	565	210	2150	3680	850
		4503	800		1000	910	1810	3135	1450	1450	565	210	2150	3650	850
	300-300	315S	110		700	810	1180	1820	805	805	388	150	1270	875	250
		280M	90		700	810	1180	1860	820	820	330	150	1050	610	260
		280S	75		700	810	1210	1700	745	745	330	150	1000	520	250
	300-435	315L	160		700	870	1400	2060	915	915	386	210	1340	1135	410
		355(6KV)	280		700	870	1295	2570	790	790	525	210	1800	1740	440
		355(6KV)	315		700	870	1295	2570	790	790	525	210	1800	1810	440
	300-560	355(6KV)	280		950	910	1335	2660	820	820	525	210	1800	1740	440
		355(6KV)	355		950	910	1335	2660	820	820	525	210	1800	1740	440
		400(6KV)	450		950	910	1890	2940	900	900	545	210	1900	2280	480
		400(6KV)	630		950	910	1890	2940	900	900	545	210	1900	2280	480
	300-700	4005	560		950	950	1385	2780	860	860	545	210	1900	2570	480
		400(6KV)	630		950	950	1385	2780	860	860	545	210	1900	2570	480
		4504	900		990	1000	1900	3460	1080	1080	565	210	2150	3680	850
		5002	1120		990	1000	2220	3460	1080	1080	725	210	2420	4800	860
	300-850	5002	1120		1150	1080	2100	3760	1200	1200	725	270	2420	4800	900
		5004	1400		1150	1080	2100	3760	1200	1200	725	270	2420	5100	900
		5601	1600		1150	1080	2320	3920	1250	1250	750	270	2480	6350	1100
		5602	1800		1150	1080	2320	3920	1250	1250	750	270	2480	6700	1100
		4503	560		1150	1080	1980	3450	1600	1600	605	270	2080	3700	880
		4502	500		1150	1080	1980	3450	1600	1600	605	270	2080	3600	880
		4501	450		1150	1080	1980	3450	1600	1600	605	270	2080	3500	880
		4005	400		1150	1080	1880	3230	1500	1500	545	270	1900	2800	850
6	300-850	5002	1120		1150	1080	2100	3760	1200	1200	725	270	2420	4800	900
		5004	1400		1150	1080	2100	3760	1200	1200	725	270	2420	5100	900
		5601	1600		1150	1080	2320	3920	1250	1250	750	270	2480	6350	1100
		5602	1800		1150	1080	2320	3920	1250	1250	750	270	2480	6700	1100

CYS型单级双吸中开离心泵

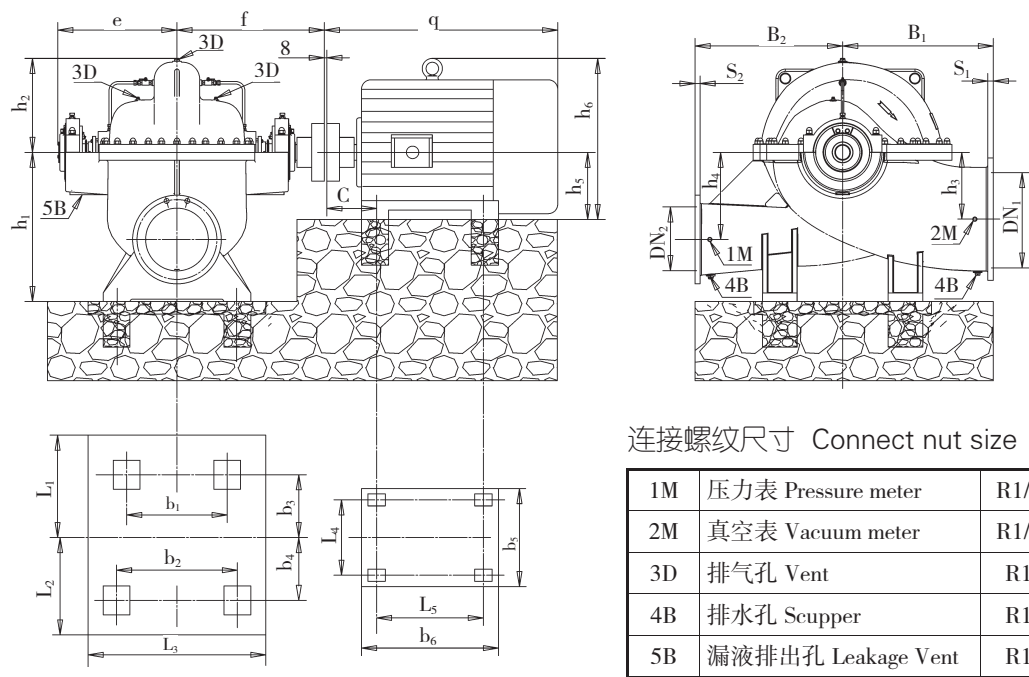

主要外形尺寸(配 Y 型电机)
单位: mm

Outline Dimension(Y serial motor)
Unit: mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size																泵重量(kg) Pump weight			
		DN ₁	DN ₂	S ₁	S ₂	B ₁	B ₂	e	f	h ₁	h ₂	h ₃	h ₄	L ₁	L ₂	L ₃	b ₁	b ₂	b ₃	b ₄					
350-360		400	350	57	54	650	550	516	731	670	490	350	350	400	400	600	520	520	350	350	1430				
350-430		450	350	60.5	54	750	650	595	810	750	545	400	400	525	525	600	520	520	475	475	2120				
350-510		400	350	57	54	700	650	585	810	750	500	400	400	525	525	600	520	520	475	475	2302				
350-575		400	350	58	54	900	700	720	956	900	550	475	475	560	560	780	730	730	485	485	2900				
350-630		400	350	38	36	740	670	680	860	775	509	460	460	550	490	830	710	710	445	385	2893				
350-690		400	350	58	54	900	750	720	956	900	550	475	475	560	560	780	730	730	485	485	3000				
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type			电机功率(Kw) Motor power				L ₄		L ₅		b ₅		b ₆		h ₅		h ₆		c		q		电机重量(kg) Motor weight
4	350-360	315S			110				508		406		628		609		315		865		386		1270		875
		315M			132				508		457		628		660		315		865		386		1340		1025
		315L			160				508		508		628		711		315		865		386		1340		1135
		315L			200				508		508		628		711		315		865		386		1340		1255
	350-430	355M			220				610		560		740		830		355		1035		424		1570		1350
		355L			280				610		630		740		830		355		1035		424		1570		1550
		355			355				630		900		800		1420		355		1070		525		1800		1800
		400			450				800		1120		1000		1650		450		1350		605		1900		2280
	350-510	355			315				610		630		740		830		355		1035		424		1570		1650
		400			450				800		1120		1000		1650		450		1350		605		1900		2280
		400			560				800		1120		1000		1650		450		1350		605		1900		2570
		450			630				800		1120		1000		1650		450		1350		605		2150		2880
	350-575	400			500				800		1120		1000		1650		450		1350		605		1900		2450
		400			560				800		1120		1000		1650		450		1350		605		1900		2570
		450			710				800		1120		1000		1650		450		1350		605		2150		3600
		450			900				800		1120		1000		1650		450		1350		605		2150		3680
	350-630	450			710				800		1120		1000		1650		450		1350		605		2150		3600
		450			800				800		1120		1000		1650		450		1350		605		2150		3650
		450			900				800		1120		1000		1650		450		1350		605		2150		3680
		500			1000				900		1250		1120		1650		500		1520		727		2420		3800
	350-690	450			710				800		1120		1000		1650		450		1350		605		2150		3600
		450			900				800		1120		1000		1650		450		1350		605		2150		3680
		500			1200				900		1250		1120		1650		500		1520		727		2420		4930
		500			1400				900		1250		1120		1650		500		1520		727		2420		5100

主要外形尺寸(配Y型电机)

Outline Dimension(Y serial motor)

单位:mm

Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size																泵重量 (kg) Pump weight			
		DN ₁	DN ₂	S ₁	S ₂	B ₁	B ₂	e	f	h ₁	h ₂	h ₃	h ₄	L ₁	L ₂	L ₃	b ₁	b ₂	b ₃	b ₄					
400-525		500	400	64	58	750	700	747	998	900	550	475	475	700	700	1500	890	890	600	600	2650				
400-560		500	400	42	40	800	700	685	865	820	500	400	460	600	550	950	800	800	475	425	2970				
400-600		500	400	56	48	800	700	738	960	850	550	490	490	650	550	950	800	800	525	425	3220				
400-665		500	400	64	58	1000	750	747	998	1000	620	525	525	700	700	1500	890	890	600	600	3520				
400-675		500	400	64	57	900	800	660	854	900	580	450	450	640	640	730	630	630	565	565	3220				
400-705		500	400	64	58	900	800	720	956	900	570	450	450	760	760	1440	750	750	660	660	3100				
400-900		500	400	52	48	1000	1000	736	1030	960	710	550	550	750	750	800	700	700	625	625	3410				
400-935		500	400	64	58	1050	1000	720	956	1000	650	550	550	760	760	1440	780	780	660	660	3400				
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type			电机功率(Kw) Motor power				L ₄		L ₅		b ₅		b ₆		h ₅		h ₆		c		q	电机重量(kg) Motor weight	
4	400-525	4003			450				710		1000		900		1500		400		1200		545		1900	2640	
		4004			500				710		1000		900		1500		400		1200		545		1900	2730	
		4501			630				800		1120		1000		1650		450		1350		605		2080	3550	
		4503			800				800		1120		1000		1650		450		1350		605		2080	3930	
6		355M1			160				508		508		628		711		355		865		388		1340	1350	
		355M2			185				508		508		628		711		355		865		388		1340	1400	
		355L1			220				508		508		628		711		355		865		388		1340	860	
		4002			280				710		1000		900		1500		400		1200		545		1900	2560	
4	400-560	4005			560				710		1000		900		1500		400		1200		545		1900	2880	
		4501			630				800		1120		1000		1650		450		1350		605		2080	3550	
		4502			710				800		1120		1000		1650		450		1350		605		2080	3670	
		4503			800				800		1120		1000		1650		450		1350		605		2080	3930	
	400-600	4503			800				800		1120		1000		1650		450		1350		605		2080	3930	
		4504			900				800		1120		1000		1650		450		1350		605		2080	3960	
		5001			1000				900		1250		1120		1650		500		1520		725		2190	5680	
		5002			1120				900		1250		1120		1650		500		1520		725		2190	5830	
		5003			1250				900		1250		1120		1650		500		1520		725		2190	6040	
		4504			800				800		1120		1000		1650		450		1350		605		2080	3960	
		5001			1000				900		1250		1120		1650		500		1520		725		2190	5680	
		5003			1250				900		1250		1120		1650		500		1520		725		2190	6040	
	400-665	5601			1600				1000		1400		1250		2000		560		1800		802		2530	6550	
		4003			315				710		1000		900		1500		400		1200		545		1900	2640	
		4005			400				710		1000		900		1500		400		1200		545		1900	2800	
		4502			500				800		1120		1000		1650		450		1350		605		2080	3600	
		4504			630				800		1120		1000		1650		450		1350		605		2080	3800	
		400-675	4003			315				710		1000		900		1500		400		1200		545		1900	2640
			4005			400				710		1000		900		1500		400		1200		545		1900	2880
			4501			450				800		1120		1000		1650		450		1350		605		2080	3550
	4503			560				800		1120		1000		1650		450		1350		605		2080	3930		
	400-705		4002			280				710		1000		900		1500		400		1200		545		1900	2560
			4003			355				710		1000		900		1500		400		1200		545		1900	2640
			4501			450				800		1120		1000		1650		450		1350		605		2080	3550
			4503			560				800		1120		1000		1650		450		1350		605		2080	3930
400-900		5002			800				900		1250		1120		1650		500		1520		725		2190	4830	
		5004			1000				900		1250		1120		1650		500		1520		725		2190	5100	
		5602			1250				1000		1400		1250		2000		560		1800		802		2530	6200	
		6301			1600				1120		1600		1400		2200		630		2000		832		2820	8300	
400-935	5001			710				900		1250		1120		1650		500		1520		725		2190	4660		
	5003			900				900		1250		1120		1650		500		1520		725		2190	4930		
	5601			1120				1000		1400		1250		2000		560		1800		802		2530	5900		
	5603			1400				1000		1400		1250		2000		560		1800		802		2530	6500		

CYS型单级双吸中开离心泵

主要外形尺寸(配 Y 型电机)
单位:mm

Outline Dimension(Y serial motor)
Unit:mm

泵型号 Pump type	法兰尺寸 Flange size				泵尺寸 Pump size																泵重量(kg) Pump weight		
	DN ₁	DN ₂	S ₁	S ₂	B ₁	B ₂	e	f	h ₁	h ₂	h ₃	h ₄	L ₁	L ₂	L ₃	b ₁	b ₂	b ₃	b ₄				
500-520	600	500	48	42	850	550	815	970	900	560	475	475	550	400	1100	640	940	325	175	3350			
500-585	600	500	48	44	1100	800	847	1098	1100	680	550	550	760	760	1700	1050	1050	660	660	4800			
500-650	600	500	36	34	850	800	828	1050	920	618	495	495	600	600	1100	640	640	375	375	3800			
500-685	600	500	48	44	1100	800	847	1098	1100	670	575	575	760	760	1700	1050	1050	660	660	4700			
500-710	600	500	36	34	1050	850	815	1042	1000	645	550	620	750	650	1200	1000	1000	525	425	4900			
500-800	600	500	48	44	1000	900	817	1052	1050	660	600	600	800	700	1200	655	655	575	475	5800			
500-835	600	500	48	44	1150	1100	847	1166	1100	690	575	575	970	970	1750	1070	1070	870	870	5200			
500-860	600	500	36	46	1050	950	872	1187	1100	730	650	650	850	750	1100	680	940	625	525	7690			
500-870	600	500	48	44	1200	900	872	1166	1200	775	700	700	845	845	1750	1070	1070	745	745	5500			
500-1015	600	500	48	44	1200	1100	872	1166	1200	750	725	725	970	970	1750	1070	1070	870	870	6000			
500-1050	600	500	46	44	1250	1100	872	1168	1200	800	700	700	850	850	1070	870	870	750	750	4750			
电机极数 Motor pole	泵型号 Pump type		电机型号 Motor type		电机功率(Kw) Motor power			L ₄		L ₅		b ₅		b ₆		h ₅		h ₆		c		q	电机重量(kg) Motor weight
4	500-520	355M2		185			508		508		628		711		355		865		388		1340		1400
		355M3		200			508		508		628		711		355		865		388		1340		1500
		355L1		220			508		508		628		711		355		865		388		1340		860
		355L3		250			508		508		628		711		355		865		388		1340		1650
		4002		280			710		1000		900		1500		400		1200		545		1900		2560
	500-585	4002		280			710		1000		900		1500		400		1200		545		1900		2560
		4003		355			710		1000		900		1500		400		1200		545		1900		2640
		4005		400			710		1000		900		1500		400		1200		545		1900		2880
		4502		500			800		1120		1000		1650		450		1350		605		2080		3670
	500-650	4003		315			710		1000		900		1500		400		1200		545		1900		2640
		4005		400			710		1000		900		1500		400		1200		545		1900		2880
		4502		500			800		1120		1000		1650		450		1350		605		2080		3670
		4503		560			800		1120		1000		1650		450		1350		605		2080		3930
	500-685	4504		630			800		1120		1000		1650		450		1350		605		2080		3960
		4501		450			800		1120		1000		1650		450		1350		605		2080		3550
		4503		560			800		1120		1000		1650		450		1350		605		2080		3930
		5001		710			900		1250		1120		1650		500		1520		727		2190		4660
	500-710	5003		900			900		1250		1120		1650		500		1520		727		2190		4930
		4503		560			800		1120		1000		1650		450		1350		605		2080		3930
		5001		710			900		1250		1120		1650		500		1520		727		2190		4660
		5003		900			900		1250		1120		1650		500		1520		727		2190		4930
		5004		1000			900		1250		1120		1650		500		1520		727		2190		5100
	500-800	5601		1120			1000		1400		1250		2000		560		1800		802		2530		5900
		5001		710			900		1250		1120		1650		500		1520		727		2190		4660
		5002		800			900		1250		1120		1650		500		1520		727		2190		4830
		5004		1000			900		1250		1120		1650		500		1520		727		2190		5100
	500-835	5602		1250			1000		1400		1250		2000		560		1800		802		2530		6200
		5001		710			900		1250		1120		1650		500		1520		727		2190		4660
		5003		900			900		1250		1120		1650		500		1520		727		2190		4930
		5601		1120			1000		1400		1250		2000		560		1800		802		2530		5900
	500-860	5603		1400			1000		1400		1250		2000		560		1800		802		2530		6500
		5601		1120			1000		1400		1250		2000		560		1800		802		2530		5900
		5602		1250			1000		1400		1250		2000		560		1800		802		2530		6200
		6301		1600			1120		1600		1400		2200		630		2000		832		2820		8300
500-870	6303		2000			1120		1600		1400		2200		630		2000		832		2820		9200	
	5003		900			900		1250		1120		1650		500		1520		727		2190		4930	
	5601		1120			1000		1400		1250		2000		560		1800		802		2530		5900	
	5603		1400			1000		1400		1250		2000		560		1800		802		2530		6500	
500-1015	6302		1800			1120		1600		1400		2200		630		2000		832		2820		8700	
	5601		1120			1000		1400		1250		2000		560		1800		802		2530		5900	
	5603		1400			1000		1400		1250		2000		560		1800		802		2530		6500	
	7101		2240			1400		1800		1600		2400		710		2330		882		3200		10800	
500-1050	6301		1600			1120		1600		1400		2200		630		2000		832		2820		8300	
	6303		2000			1120		1600		1400		2200		630		2000		832		2820		9200	
	7102		2500			1400		1800		1600		2400		710		2330		882		3200		11300	

主要外形尺寸(配Y型电机)

单位:mm

Outline Dimension(Y serial motor)

Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size																泵重量 (kg) Pump weight	
		DN ₁	DN ₂	S ₁	S ₂	B ₁	B ₂	e	f	h ₁	h ₂	h ₃	h ₄	L ₁	L ₂	L ₃	b ₁	b ₂	b ₃	b ₄			
600-560		700	600	54	48	900	1100	871	1025	1100	750	610	610	700	800	1100	550	850	475	575	5330		
600-600		700	600	54	48	1200	900	847	1098	1200	770	675	675	725	725	1300	970	970	625	625	4900		
600-630		700	600	54	48	1000	1000	839	1110	1050	667	545	545	500	500	1100	550	850	575	575	4886		
600-705		700	600	54	48	1150	1000	847	1098	1100	715	575	575	725	725	1300	970	970	625	625	4700		
600-710		700	600	40	36	1000	1100	850	1055	1050	650	545	545	800	800	1200	720	1020	575	575	5030		
600-860		700	600	54	48	1100	1200	950	1225	1100	760	580	580	1000	900	1350	570	850	600	500	7850		
600-885		700	600	54	48	1300	1100	926	1280	1300	790	750	750	850	850	1300	970	970	750	750	5600		
600-1075		700	600	54	48	1250	1200	926	1280	1300	850	750	750	850	850	1400	1050	1050	750	750	5800		
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type			电机功率(Kw) Motor power				L ₄	L ₅	b ₅	b ₆	h ₅	h ₆	c	q	电机重量(kg) Motor weight						
6	600-560	355L3			250				508	508	628	711	355	865	388	1340	1650						
		4002			280				710	1000	900	1500	400	1200	545	1900	2560						
		4003			355				710	1000	900	1500	400	1200	545	1900	2640						
		4501			450				800	1120	1000	1650	450	1350	605	2080	3550						
	600-600	4005			400				710	1000	900	1500	400	1200	545	1900	2640						
		4501			450				800	1120	1000	1650	450	1350	605	2080	3550						
		4503			560				800	1120	1000	1650	450	1350	605	2080	3930						
		5001			710				900	1250	1120	1650	500	1520	727	2190	4660						
	600-630	4003			355				710	1000	900	1500	400	1200	545	1900	2640						
		4501			450				800	1120	1000	1650	450	1350	605	2080	3550						
		4503			560				800	1120	1000	1650	450	1350	605	2080	3930						
		5001			710				900	1250	1120	1650	500	1520	727	2190	4660						
	600-705	4503			560				800	1120	1000	1650	450	1350	605	2080	3930						
		5001			710				900	1250	1120	1650	500	1520	727	2190	4660						
		5003			900				900	1250	1120	1650	500	1520	727	2190	4930						
		5601			1120				1000	1400	1250	2000	560	1800	802	2530	5900						
	600-710	4502			500				800	1120	1000	1650	450	1350	605	2080	3670						
		4504			630				800	1120	1000	1650	450	1350	605	2080	3960						
		5002			800				900	1250	1120	1650	500	1520	727	2190	4830						
		5003			900				900	1250	1120	1650	500	1520	727	2190	4930						
	600-860	5603			1400				1000	1400	1250	2000	560	1800	802	2530	6500						
		6301			1600				1120	1600	1400	2200	630	2000	832	2820	8300						
		6303			2000				1120	1600	1400	2200	630	2000	832	2820	9200						
		7101			2240				1400	1800	1600	2400	710	2330	882	3200	10800						
	600-885	5602			1250				1000	1400	1250	2000	560	1800	802	2530	6200						
		5603			1400				1000	1400	1250	2000	560	1800	802	2530	6500						
		6302			1800				1120	1600	1400	2200	630	2000	832	2820	8700						
		7101			2240				1400	1800	1600	2400	710	2330	882	3200	10800						
600-1075	6303			2000				1120	1600	1400	2200	630	2000	832	2820	9200							
	7102			2500				1400	1800	1600	2400	710	2330	882	3200	11300							
	7103			3150				1400	1800	1600	2400	710	2330	882	3200	11800							
	8002			4000				1600	1800	1860	2600	800	2550	882	3420	16000							

CYS型单级双吸中开离心泵

主要外形尺寸(配 Y 型电机)
单位:mm

Outline Dimension(Y serial motor)
Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size																泵重量(kg) Pump weight	
		DN ₁	DN ₂	S ₁	S ₂	B ₁	B ₂	e	f	h ₁	h ₂	h ₃	h ₄	L ₁	L ₂	L ₃	b ₁	b ₂	b ₃	b ₄			
700-600		800	700	44	42	800	1300	1040	1312	1150	790	600	600	600	900	1200	700	1000	325	625	6670		
700-710		800	700	44	40	1200	1150	1056	1293	1170	780	620	620	900	900	1200	700	1000	626	625	8793		
700-800		800	700	58	54	1250	1250	1031	1400	1200	810	650	650	600	600	1200	700	1020	675	675	10000		
700-980		800	700	58	54	1300	1050	1011	1365	1500	930	850	850	850	850	1600	1240	1240	750	750	7700		
800-800		900	800	62	58	1400	950	1140	1410	1380	1010	770	770	750	900	1300	800	1100	425	575	9400		
800-900		900	800	46	44	1400	1125	1070	1380	1360	985	770	770	900	950	1300	800	1100	575	625	12100		
800-990		900	800	62	58	1400	1300	1220	1530	1370	850	760	760	1100	1100	1450	650	950	600	600	12880		
电机极数 Motor pole	泵型号 Pump type		电机型号 Motor type		电机功率(Kw) Motor power				L ₄	L ₅	b ₅	b ₆	h ₅	h ₆	c	q	电机重量(kg) Motor weight						
6	700-600	4503		560				800	1120	1000	1650	450	1350	605	2080	3930							
		4504		630				800	1120	1000	1650	450	1350	605	2080	3960							
		5001		710				900	1250	1120	1650	500	1520	727	2190	4660							
	700-710	5001		710				900	1250	1120	1650	500	1520	727	2190	4660							
		5003		900				900	1250	1120	1650	500	1520	727	2190	4930							
		5004		1000				900	1250	1120	1650	500	1520	727	2190	5100							
	700-800	5601		1120				1000	1400	1250	2000	560	1800	802	2530	5900							
		5603		1400				1000	1400	1250	2000	560	1800	802	2530	6500							
		6302		1800				1120	1600	1400	2200	630	2000	832	2820	8700							
		6303		2000				1120	1600	1400	2200	630	2000	832	2820	9200							
	700-980	8001		3550				900	1250	1120	1650	500	1520	727	2190	15200							
		7104		3150				1000	1400	1250	2000	560	1800	802	2530	12300							
		7102		2500				1000	1400	1250	2000	560	1800	802	2530	11300							
		7101		2240				1120	1600	1400	2200	630	2000	832	2820	10800							
		6301		1000				1000	1400	1250	2000	560	1800	802	2530	8115							
		6303		1250				1120	1600	1400	2200	630	2000	832	2820	8355							
		630		1400				1120	1600	1400	2200	630	2000	832	2820	8000							
		7101		1800				1400	1800	1600	2400	710	2330	882	3200	11200							
8	800-800	5003		630				900	1250	1120	1650	500	1520	727	2190	4900							
		5004		710				900	1250	1120	1650	500	1520	727	2190	5200							
		5601		800				1000	1400	1250	2000	560	1800	802	2530	5500							
		5602		900				1000	1400	1250	2000	560	1800	802	2530	5850							
	800-900	5602		900				1000	1400	1250	2000	560	1800	802	2530	5850							
		5603		1000				1000	1400	1250	2000	560	1800	802	2530	6250							
		6301		1120				1120	1600	1400	2200	630	2000	832	2820	7500							
		6302		1250				1120	1600	1400	2200	630	2000	832	2820	7800							
		6303		1400				1120	1600	1400	2200	630	2000	832	2820	8200							
	800-990	6303		1400				1120	1600	1400	2200	630	2000	832	2820	8200							
		6304		1600				1120	1600	1400	2200	630	2000	832	2820	8600							
		7101		1800				1400	1800	1600	2400	710	2330	882	3200	11200							
		7103		2240				1400	1800	1600	2400	710	2330	882	3200	12200							

CYS型单级双吸中开离心泵

主要外形尺寸(配 Y 型电机)

单位:mm

Outline Dimension(Y serial motor)

Unit:mm

泵型号 Pump type		法兰尺寸 Flange size				泵尺寸 Pump size																泵重量 (kg) Pump weight	
		DN ₁	DN ₂	S ₁	S ₂	B ₁	B ₂	e	f	h ₁	h ₂	h ₃	h ₄	L ₁	L ₂	L ₃	b ₁	b ₂	b ₃	b ₄			
900-970		1000	900	50	46	1600	1300	1470	1780	1650	1265	975	975	1060	1260	1550	500	800	600	800	12230		
900-1030		1000	900	50	46	1600	1300	1470	1780	1650	1265	975	975	1060	1260	1550	500	800	600	800	12320		
900-1050		1000	900	50	46	1600	1300	1678	1870	1650	1186	975	975	1000	1200	1400	1150	1150	910	710	14330		
1000-1170		1200	1000	56	50	1800	1300	1575	1780	1820	1375	1040	1040	1060	1260	2150	1000	1400	550	750	17600		
电机极数 Motor pole	泵型号 Pump type	电机型号 Motor type			电机功率 (Kw) Motor power				L ₄		L ₅		b ₅		b ₆		h ₅		h ₆		c	q	电机重量 (kg) Motor weight
10	900-970	6304			1400				1120		1600		1400		2200		630		2000		832	2820	8200
		7101			1600				1400		1800		1600		2400		710		2330		882	3200	11100
		6303			1250				1120		1600		1400		2200		630		2000		832	2820	8180
	900-1030	6304			1400				1120		1600		1400		2200		630		2000		832	2820	8200
		8002			1800				1600		1800		1860		2600		800		2550		882	3420	15700
	900-1050	8002			2500				1600		1800		1860		2600		800		2550		882	3420	16300
		7103			2000				1120		1600		1400		2200		630		2000		832	2820	12600
12	1000-1170	8001			1600				1600		1800		1860		2600		800		2550		882	3420	15000
		8002			1800				1600		1800		1860		2600		800		2550		882	3420	15700
	900-970	6301			710				1120		1600		1400		2200		630		2000		832	2820	7450
		6302			800				1120		1600		1400		2200		630		2000		832	2820	7780
		6303			900				1120		1600		1400		2200		630		2000		832	2820	7780
	900-1030	7101			1120				1400		1800		1600		2400		710		2330		882	3200	11000
		6304			1000				1120		1600		1400		2200		630		2000		832	2820	8550
		6303			900				1120		1600		1400		2200		630		2000		832	2820	7780
	900-1050	7103			1400				1400		1800		1600		2400		710		2330		882	3200	12000
7101			1120				1400		1800		1600		2400		710		2330		882	3200	11000		
16	1000-1170	7103			800				1400		1800		1600		2400		710		2330		882	3200	11400
		7104			900				1400		1800		1600		2400		710		2330		882	3200	11900

12. 产品配置表(Supply Range of Complete Set)

需方单位名称 Buyer's name				日期 Date	
泵型号 Pump type		流量 Capacity(m ³ /h)		扬程 Head (m)	
数量 Quantity		必需汽蚀余量 NPSHr (m)		转速 Speed (rpm)	
配套电机型号 Motor type					
货物需求范围	名称 Item	选项 Option	请在此勾选 Tick		备注 Remark
	泵 Pump	卧式 Horizontal			●
		立式 Vertical			
	驱动机 Driving machine	电动机 Motor			
	轴封形式 Shaft seal	普通填料密封 Regular packing seal			●
		机械密封 Mechanical seal			
		软填料密封 Soft packing seal			
	泵转向 Rotating direction of pump	从电机端看泵, 泵为顺时针方向旋转 View from motor end, the rotating direction of pump is clockwise.			
		从电机端看泵, 泵为逆时针方向旋转 View from motor end, the rotating direction of pump is anticlockwise.			
	联轴器 Coupling	弹性柱销联轴器套装 Elastic pin coupling sets			●
		膜片联轴器 Diaphragm coupling sets			
	轴封冲洗管路	外接(提供接口) External connection			●
		内接引自泵本体 Internal connection			
	底座 Base	泵、驱动机共用底座 Common base			
		泵底座 Pump base			
		驱动机底座 Motor base			
	附件 Accessory	配对法兰及连接件 Inlet and outlet of match flanges and fittings			
		联轴器防护罩 Coupling guard			
		锥管及连接件 Taper pipe and connection parts			
		大气压力表 Local pressure gauges			
		测温元件 Thermometric element			
		底阀 Bottom valve			
		闸阀 Gate valve			
		止回阀 Check valve			
	专用工具 Special tool	勾扳手 Wrench			
	备件 Pare parts	轴套 Shaft sleeve			
		密封环 Sealing ring			
		叶轮 Impeller			
轴承 Bearing					
机械密封 Mechanical seal					
填料 Packing					
其他要求: Other requirements					
注: ●为常规配置 Notice: ● Meaning of general configuration					



辰禹（重庆）流体设备有限公司
重庆市九龙坡区锦虹二路3号2幢5-5号
联系人：李勇翹 联系电话：15922628171